



BROCHURE 2025

ENVIRONMENT & LIGHTING DESIGN _ WORKONG DESIGN _ DESIGN MANUFACTURE


Contents

3D LED BALL LIGHT	_ 3
LED POINT LIGHT	- 5
HANDRAIL LIGHT	- 7
LINEAR LIGHT	- 10
STEP LIGHT	- 72
WALL LIGHT	- 74
INGROUND LIGHT	- 86
FLOOD LIGHT	- 108
BOLLARD LIGHT	- 156
POLE LIGHT	- 173
DECORATIVE LIGHT	- 195
BLOCK LIGHT	- 238
IMAGE PROJECTION LIGHT	- 240

3D LED BALL LIGHT

나라장터 식별번호
24719709



ON-P008




SPECIFICATIONS

LED Power	1.5W
Dimensions	33 x 33 x 42 mm
Beam Angle	360°
CT / Color mixing	RGB FULL COLOR
Output (Lumen)	24 lm
IP	65

Dimensions Drawing

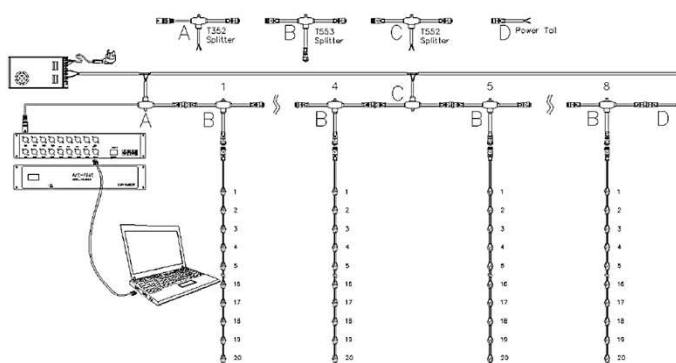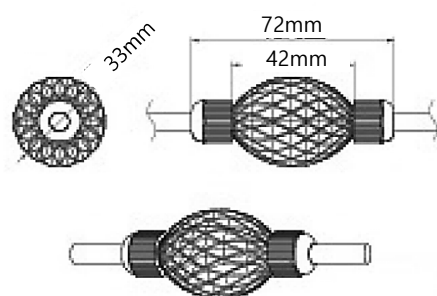

Photometric Data

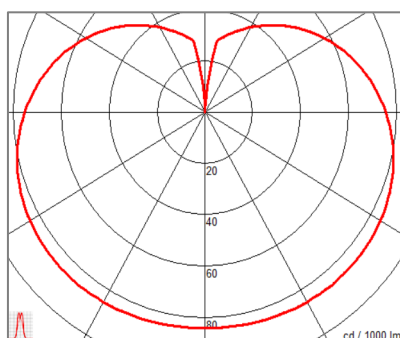

3D LED BALL LIGHT

나라장터 식별번호
24719708


ON-P007




SPECIFICATIONS

LED Power	0.9W (hollow milky white / solid frosted white / silver / gold)
Dimensions	50 x 50 x 47.5 mm
Beam Angle	360°
CT / Color mixing	RGB FULL COLOR / RGBW
Output (Lumen)	17 lm / 33.7 lm (RGBW)
IP	65

Dimensions Drawing

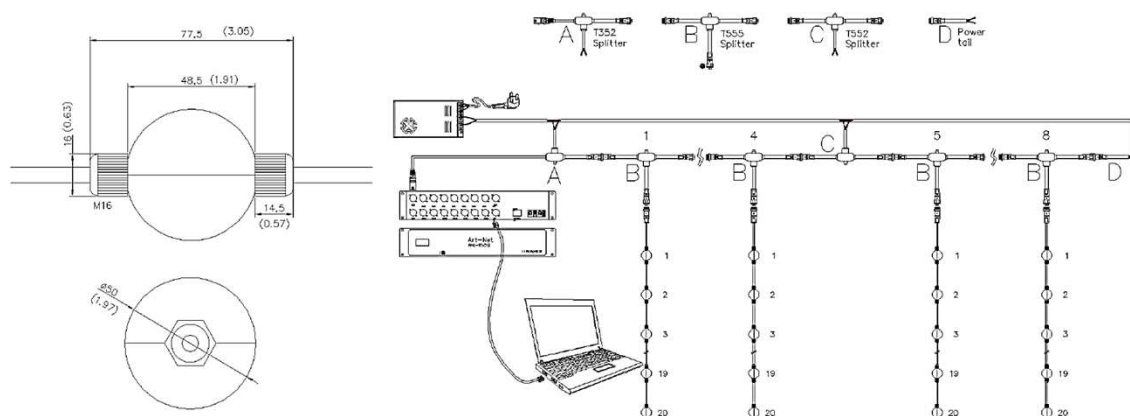

Photometric Data

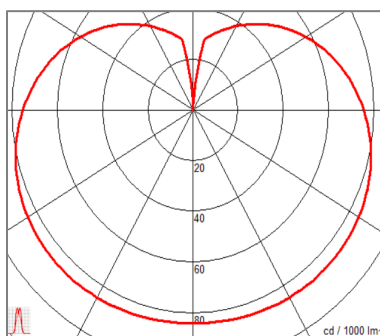

LED POINT LIGHT

나라장터 식별번호
24719710 / 24719711


ON-P009 / ON-P010




SPECIFICATIONS

LED Power	1W /2W
Dimensions	36.5 x 36.5 x 12.5mm / 50 x 50 x 12.5mm
Beam Angle (zoom)	120°
CT / Color mixing	3000K, 4000K, 5700K, RGB, RGBW
Output (Lumen)	79 lm / 82 lm
IP	65

Dimensions Drawing

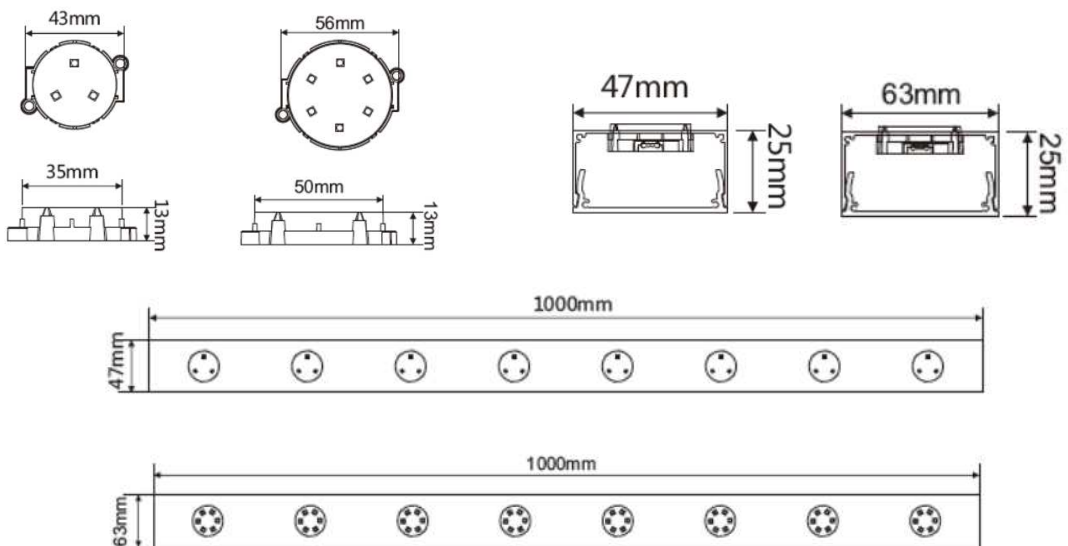

Photometric Data

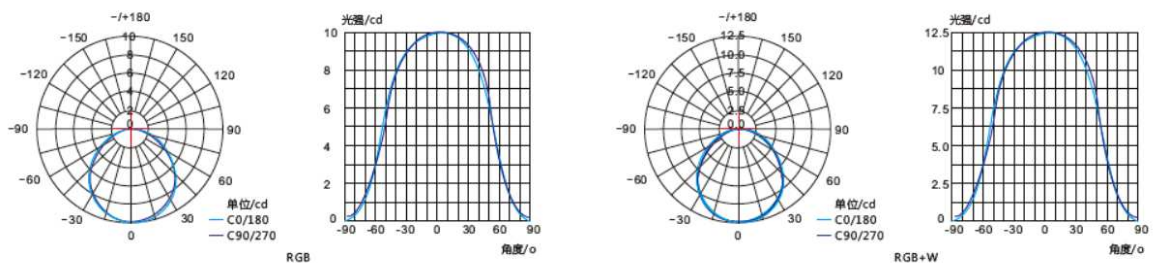

LED POINT LIGHT

나라장터 식별번호
24719712


ON-P011





SPECIFICATIONS

LED Power	3W
Dimensions	100 x 100 x 61.5 mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 5700K, RGB, RGBW
Output (Lumen)	95 lm
IP	65

Dimensions Drawing

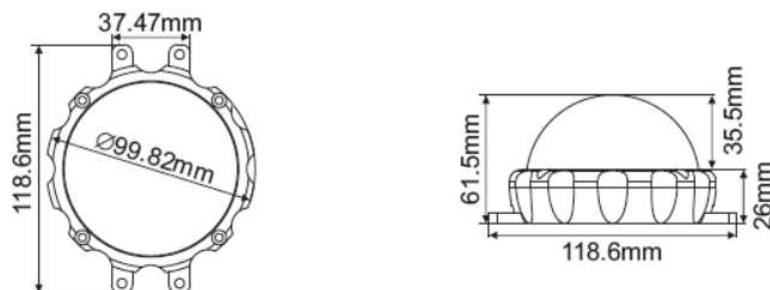

Photometric Data

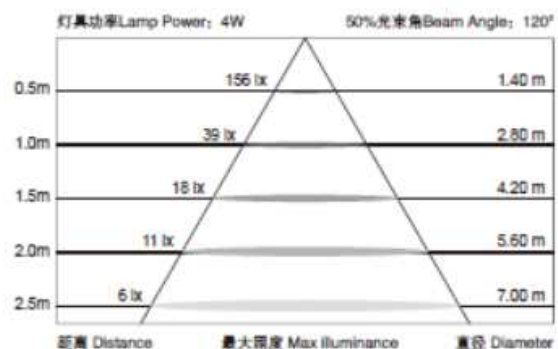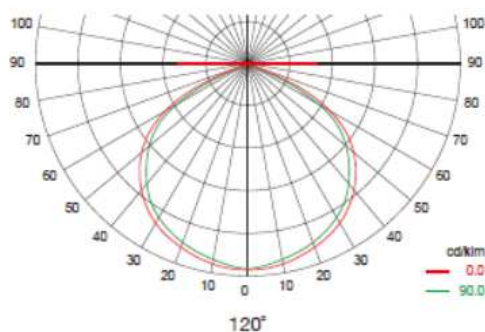

HANDRAIL LIGHT

나라장터 식별번호
24719727


ON-P026




SPECIFICATIONS

LED Power	1W
Dimensions	16 x 16 x 16 mm
Beam Angle	80° (symmetrical beam) / 10x60° (Asymmetrical beam)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	70 lm
Weight	0.02 KG
IP	67

Dimensions Drawing

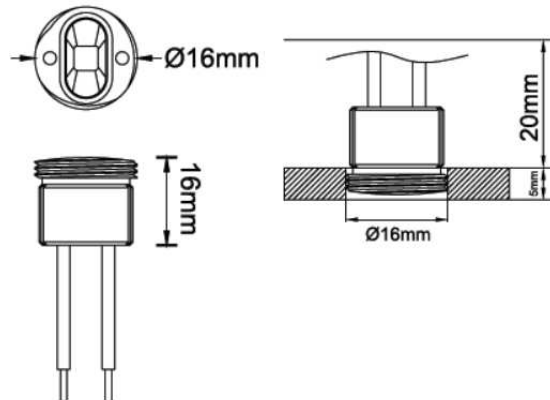

Photometric Data

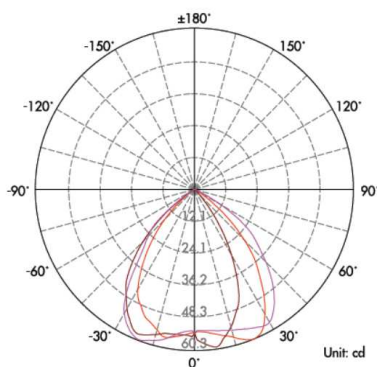

Height	Center E	Average E	Diameter
3.281ft 1.0m	4.999fc 53.813lx	2.903fc 31.252lx	5.560ft 1.695m
6.562ft 2.0m	1.250fc 13.453lx	0.726fc 7.813lx	11.120ft 3.389m
9.843ft 3.0m	0.555fc 5.979lx	0.323fc 3.472lx	16.690ft 5.084m
13.123ft 4.0m	0.312fc 3.363lx	0.181fc 1.953lx	22.240ft 6.779m
16.404ft 5.0m	0.200fc 2.153lx	0.116fc 1.250lx	27.799ft 8.473m

Beam Angle: 80.6°



3000K, 80°

HANDRAIL LIGHT

나라장터 식별번호
25480508


ON-A094




SPECIFICATIONS

LED Power	1.4W
Dimensions	28.5 x 28.5 x 28 mm
Beam Angle	70° (symmetrical beam)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	100 lm
Weight	0.048 KG
IP	67

Dimensions Drawing

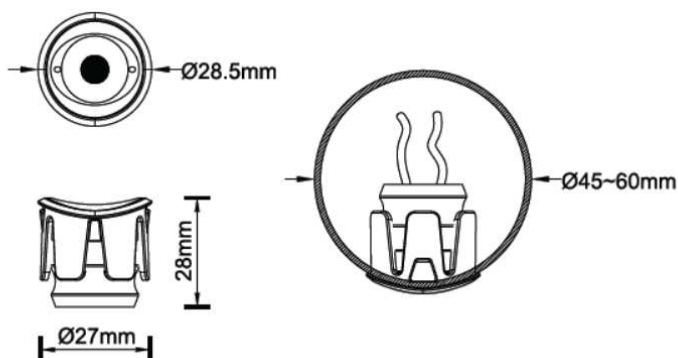

Photometric Data

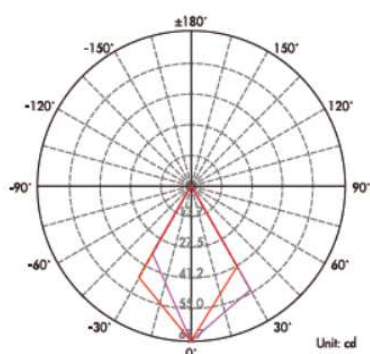

Height	Center E	Average E	Unit
1.0m	3.281lx	6.385lx	1.479m
2.0m	6.562lx	1.296lx	2.958m
3.0m	9.843lx	0.709lx	4.436m
4.0m	13.123lx	0.399lx	5.915m
5.0m	16.404lx	0.255lx	7.394m



3000K, 70°

HANDRAIL LIGHT

나라장터 식별번호
24719717


ON-P016




SPECIFICATIONS

LED Power	1.5W
Dimensions	28.5 x 28.5 x 28 mm
Beam Angle	30x60° (Asymmetrical beam)
CT / Color mixing	2700K, 3000K, 4000K, 5000K, 6000K
Output (Lumen)	76-95 lm
Weight	0.048 KG
IP	67


Dimensions Drawing

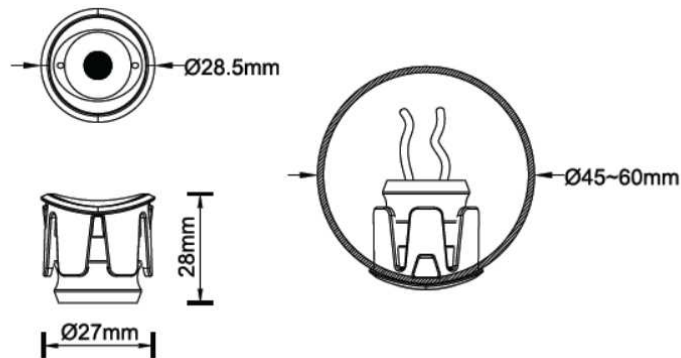

Photometric Data

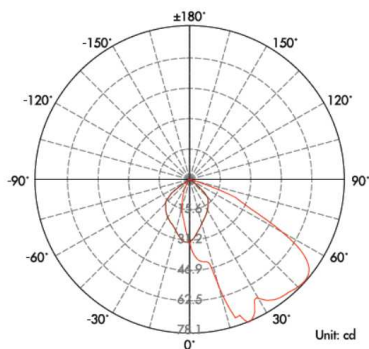

3.281ft	3.003fc	2.117fc	3.726ft
1.0m	32.32lx	22.790lx	1.136m
6.562ft	0.751fc	0.529fc	7.453ft
2.0m	8.080lx	5.698lx	2.272m
9.843ft	0.334fc	0.235fc	11.179ft
3.0m	3.591lx	2.532lx	3.407m
13.123ft	0.188fc	0.132fc	14.906ft
4.0m	2.020lx	1.424lx	4.543m
16.404ft	0.120fc	0.085fc	18.632ft
5.0m	1.293lx	0.912lx	5.679m
Height	Center E	Beam Angle: 59.2	Average E Diameter



3000K, 30X60°

LINEAR LIGHT

나라장터 식별번호
24718330 / 24718358 / 24718344


ON-L027 / L028 / L029



SPECIFICATIONS



LED Power	5.6W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	688-756 lm
IP	65

Dimensions Drawing

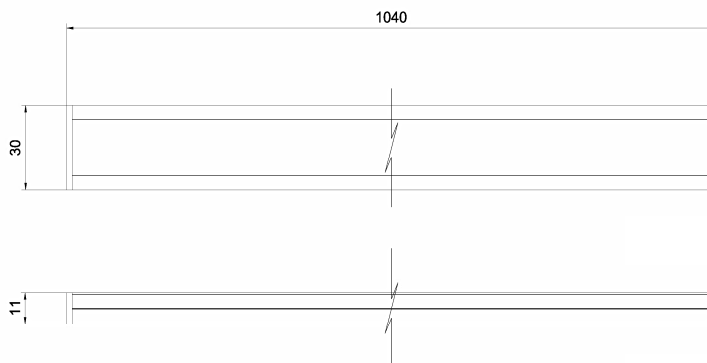

Cover series

Photometric Data

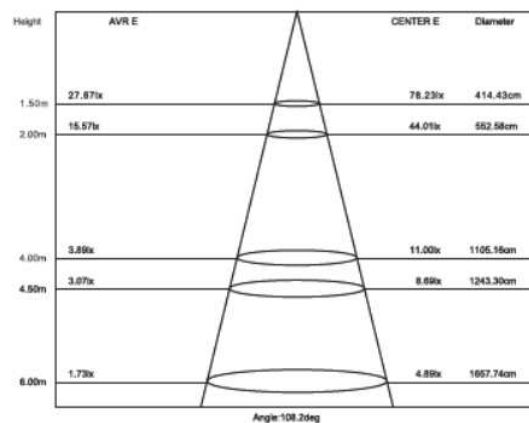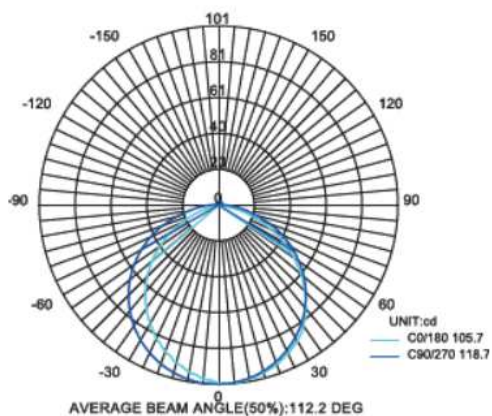

LINEAR LIGHT

나라장터 식별번호
25480505


ON-A091




SPECIFICATIONS

LED Power	6W
Dimensions	502 x 94 x 25mm
Beam Angle	15°, 20°, 25°, 30°, 38°, 45°, 60°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	430 lm
Weight	0.5 KG
IP	67

Dimensions Drawing

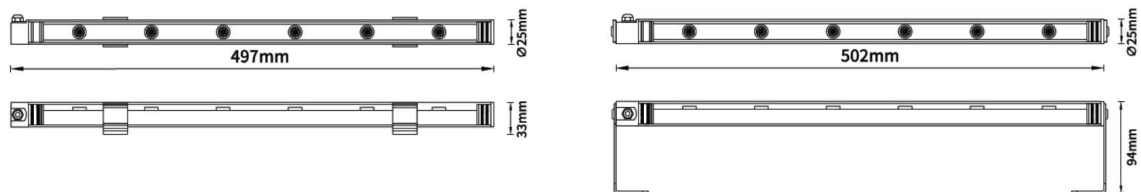

Photometric Data

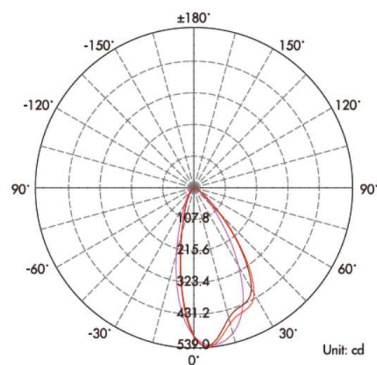

Height	Center	Average	Diameter
3.281ft 1.0m	46.613fc 661.74lx	26.254fc 382.507lx	2.897ft 0.883m
6.562ft 2.0m	11.653fc 165.43lx	6.563fc 95.619lx	5.795ft 1.760m
9.843ft 3.0m	5.179fc 55.749lx	2.917fc 31.400lx	8.692ft 2.649m
13.123ft 4.0m	2.913fc 31.309lx	1.641fc 17.662lx	11.690ft 3.530m
16.404ft 5.0m	1.865fc 20.870lx	1.050fc 11.304lx	14.687ft 4.419m

Beam Angle: 45.6°



3000K, 45°

LINEAR LIGHT

나라장터 식별번호
24718325 / 24718324 / 24718326


ON-L015 / L016 / L017



SPECIFICATIONS


LED Power	7.2W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	155-163 lm
IP	65

Dimensions Drawing

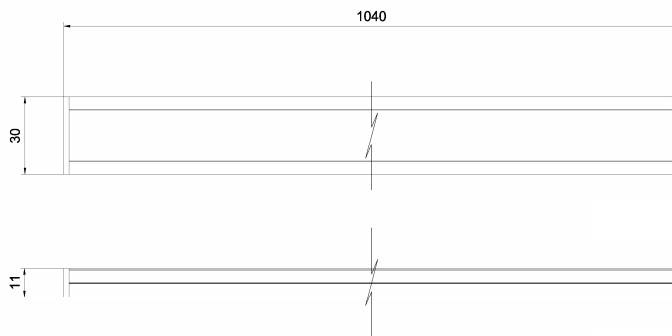

Cover series

Photometric Data

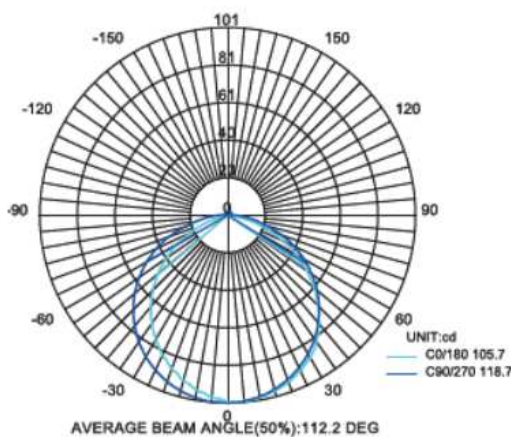

Height	AVR E	CENTER E	Diameter
1.50m	27.87lx	78.23lx	414.43cm
2.00m	15.57lx	44.01lx	552.58cm
4.00m	3.89lx	11.00lx	1105.16cm
4.50m	3.07lx	8.69lx	1243.30cm
6.00m	1.73lx	4.89lx	1657.74cm

Angle:108.3deg

LINEAR LIGHT

나라장터 식별번호
24718352 / 24718366 / 24718338


ON-L057 / L058 / L059



SPECIFICATIONS



LED Power	9W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	Dim to warm / Tunable white 1800-3000K
Output (Lumen)	120 lm/w
IP	65

Dimensions Drawing

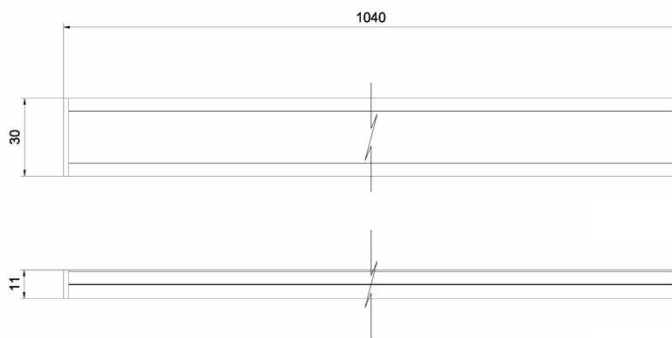

Cover series

Photometric Data

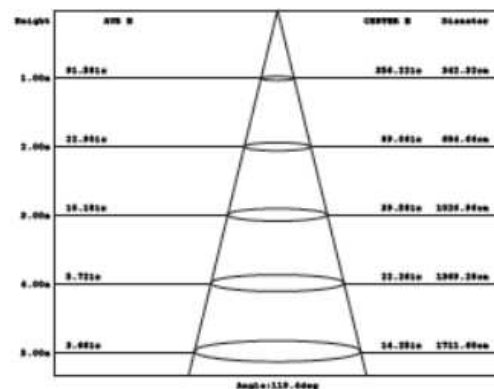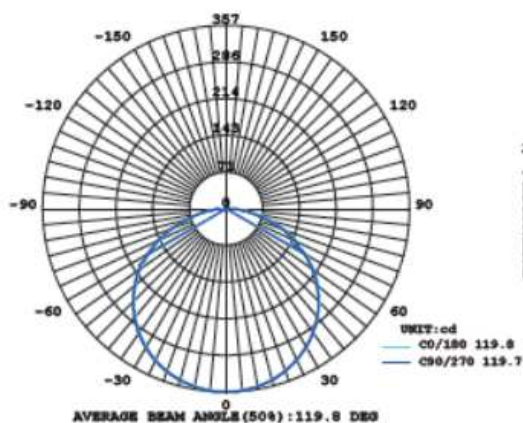

LINEAR LIGHT

나라장터 식별번호
24718341 / 24718355 / 24718327


ON-L018 / L019 / L020



SPECIFICATIONS



LED Power	9.6W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	174-178 lm /w
IP	65

Dimensions Drawing

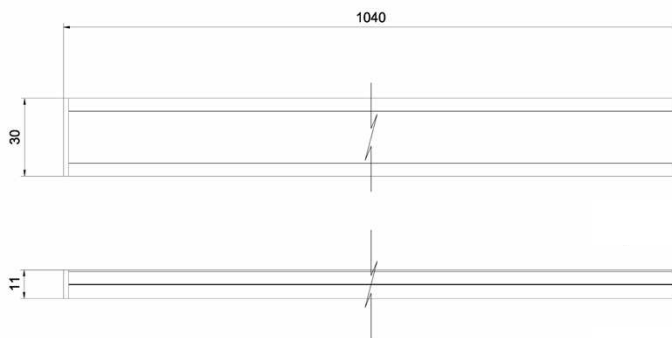

Cover series

Photometric Data

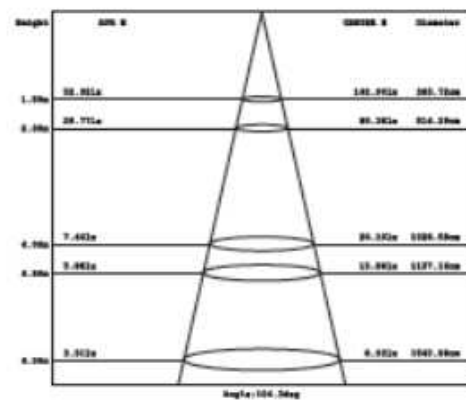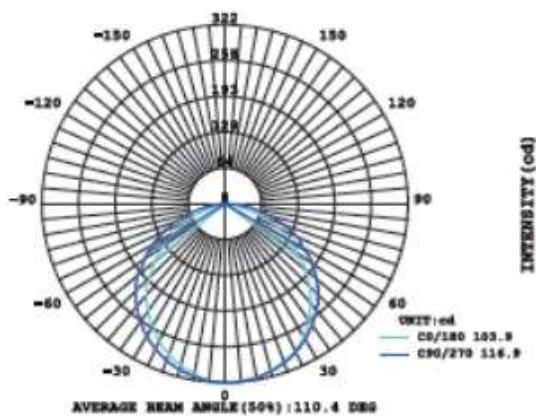

LINEAR LIGHT

나라장터 식별번호
24718380 / 24718379 / 24718378


ON-L036 / L037 / L038



SPECIFICATIONS



LED Power	10W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	RGB
Output (Lumen)	45 lm/w
IP	65

Dimensions Drawing

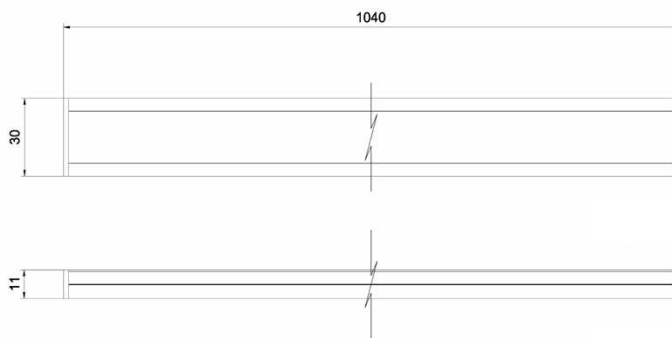

Cover series

Photometric Data

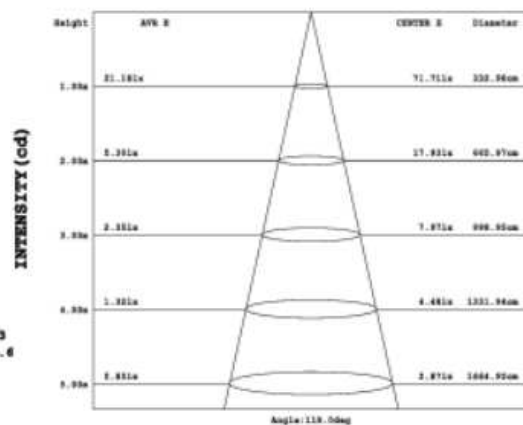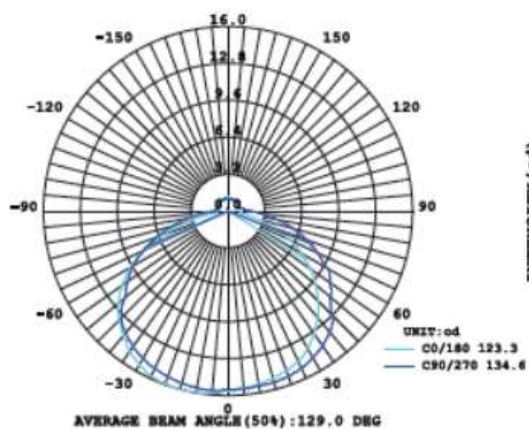

LINEAR LIGHT

나라장터 식별번호
24718353 / 24718367 / 24718339


ON-L060 / L061 / L062



SPECIFICATIONS



LED Power	10W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	180°
CT / Color mixing	COB TYPE / 2700-6000K /R/G/B
Output (Lumen)	92-98 lm /w
IP	65

Dimensions Drawing

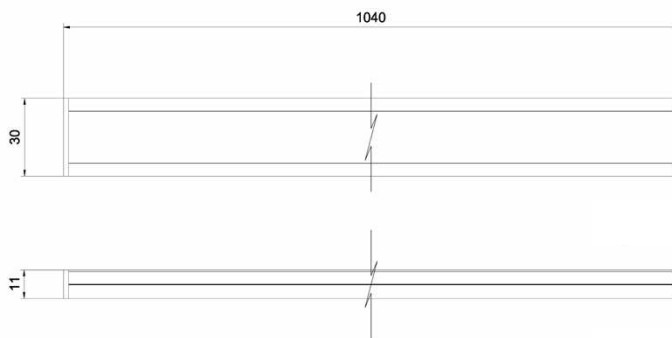

Cover series

Photometric Data

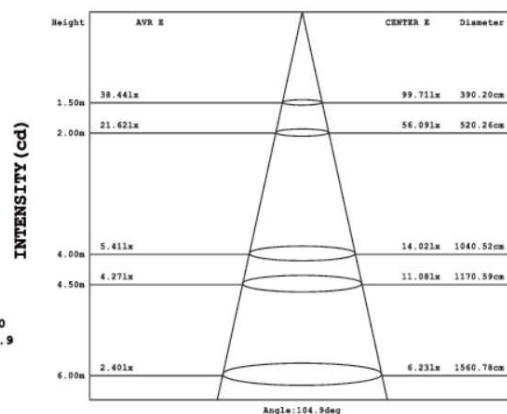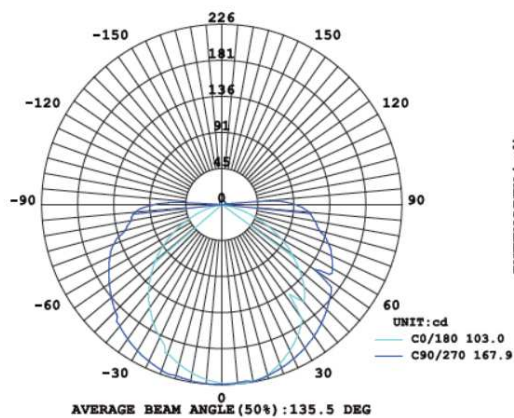

LINEAR LIGHT

나라장터 식별번호
25677657


ON-A145





SPECIFICATIONS

LED Power	10W
Dimensions	1000 x 65 x 27.5mm
Beam Angle	100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	174-178 lm /w
IP	65

Dimensions Drawing

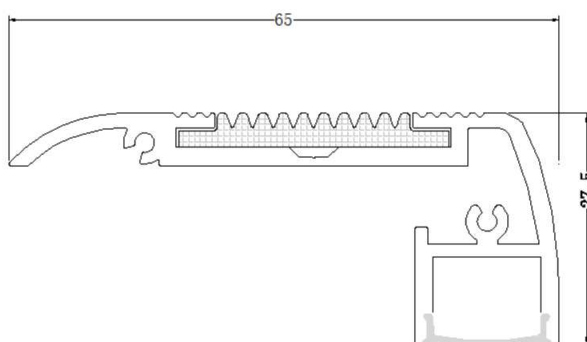

Photometric Data

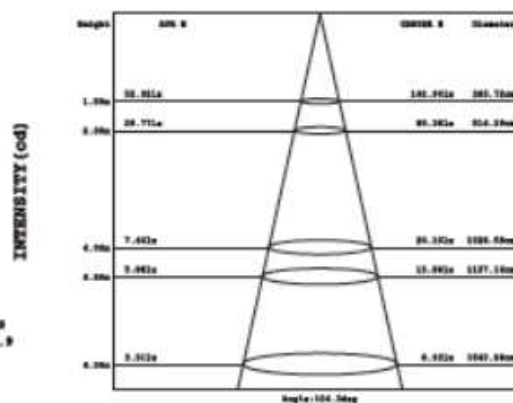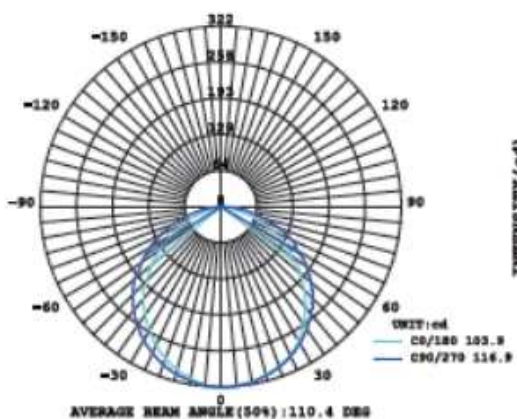

LINEAR LIGHT

나라장터 식별번호
24695132


ON-L005




SPECIFICATIONS

LED Power	10W
Dimensions	1030 x 25 x 17mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	174-178 lm
IP	65


Dimensions Drawing

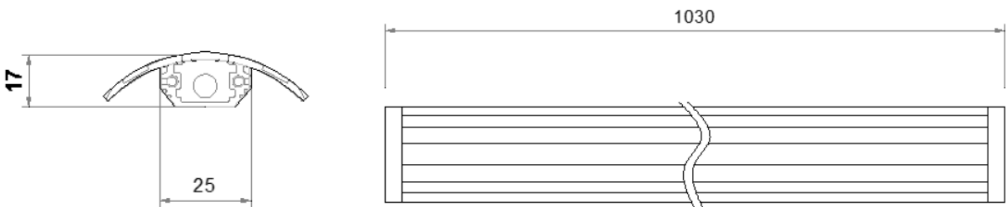

Photometric Data

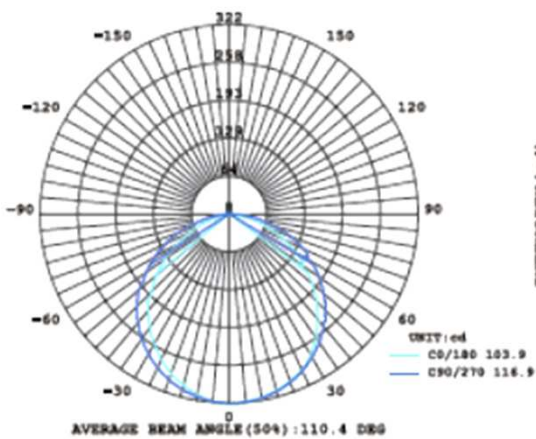

INTENSITY (cd)

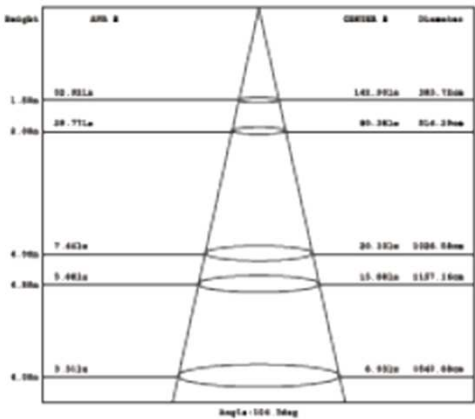

LINEAR LIGHT

나라장터 식별번호
24718345 / 24718359 / 24718331


ON-L030 /L031 / L032



SPECIFICATIONS



LED Power	11.2W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	198-208 lm /w
IP	65

Dimensions Drawing

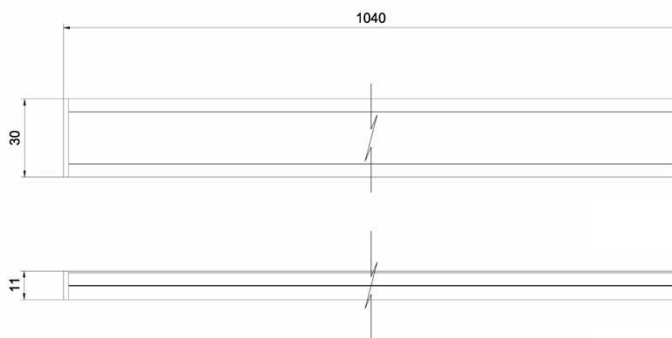

Cover series

Photometric Data

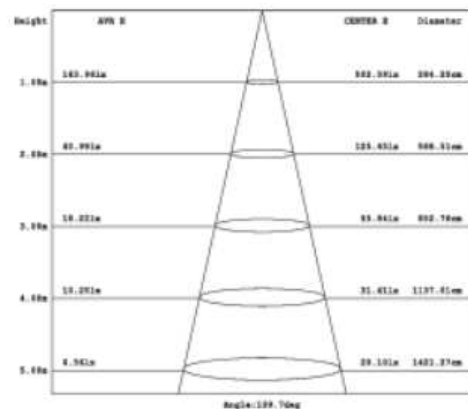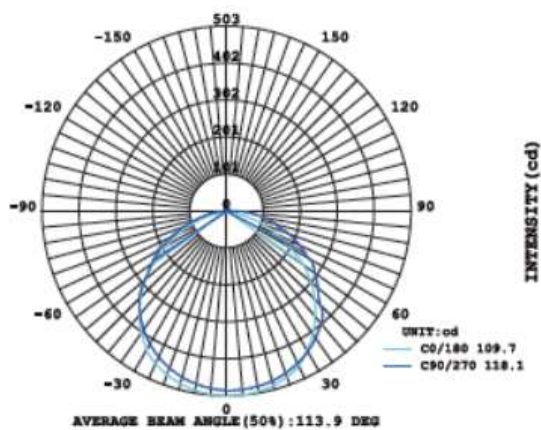

LINEAR LIGHT

나라장터 식별번호
24719686 / 24719687


ON-L010 / L011





SPECIFICATIONS

LED Power	12W
Dimensions	1000 x 30 x 47mm
Beam Angle	10°, 15°, 30°, 45°, 10*60°
CT / Color mixing	2200K / 3000K / 4000K / RGB / RGBW
Output (Lumen)	360 lm
IP	65

Dimensions Drawing

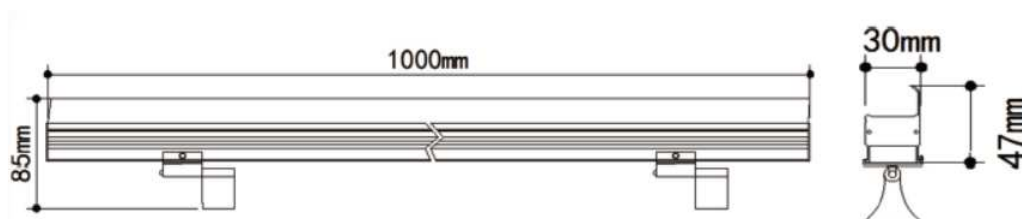

Photometric Data

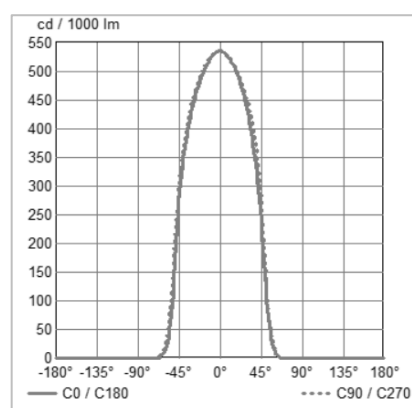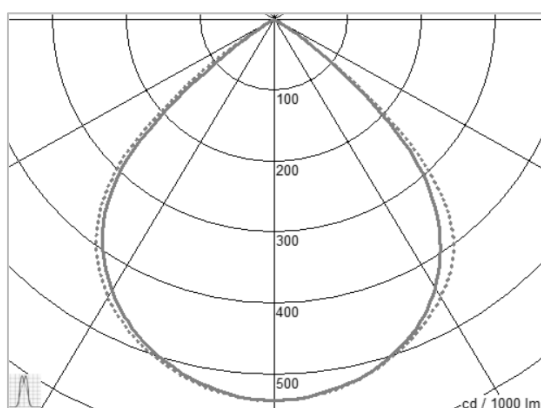

LINEAR LIGHT

나라장터 식별번호
25480506


ON-A092






SPECIFICATIONS

LED Power	12W
Dimensions	502 x 94 x 25mm
Beam Angle	100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	900 lm
Weight	0.5 KG
IP	67

Dimensions Drawing

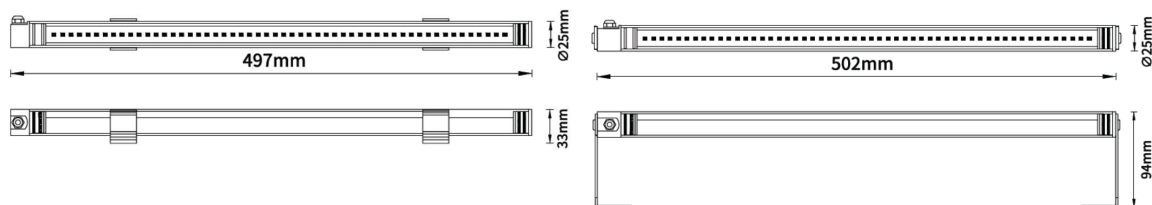

Photometric Data

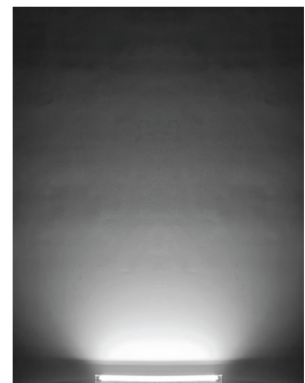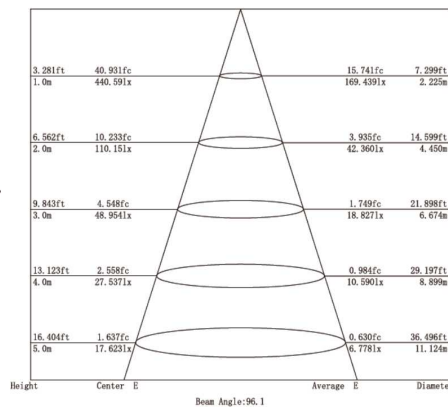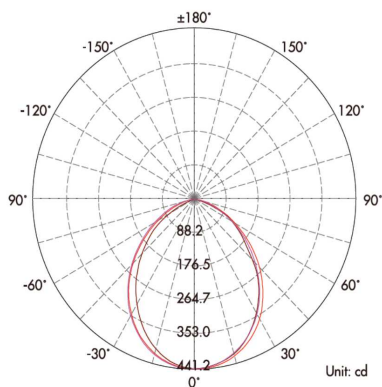

3000K, 100°

LINEAR LIGHT

나라장터 식별번호
25480426


ON-A030





SPECIFICATIONS

LED Power	12W
Dimensions	1000 x 27.5 x 66mm
Beam Angle	30°, 60°, 15°* 55°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	30 lm /w
IP	66

Dimensions Drawing

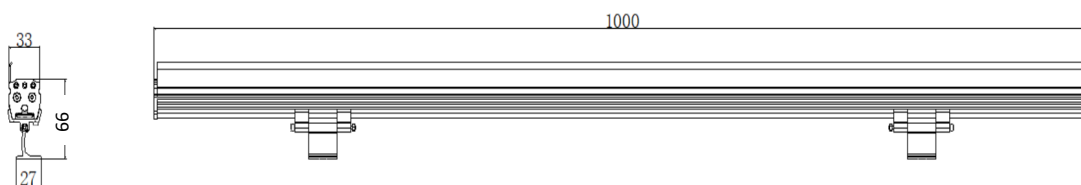

Photometric Data

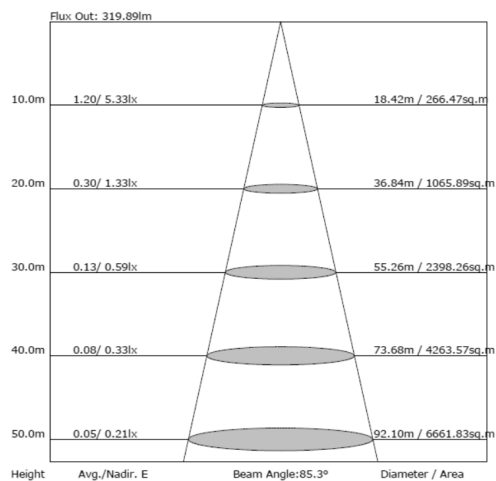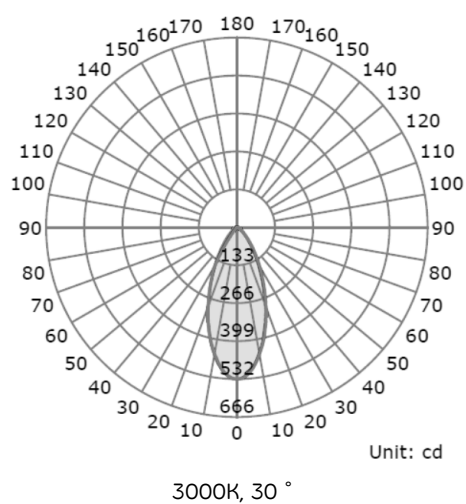

LINEAR LIGHT

나라장터 식별번호
25677653


ON-A141





SPECIFICATIONS

LED Power	12W
Dimensions	1000 x 81 x 58mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	174-178 lm
IP	65

Dimensions Drawing

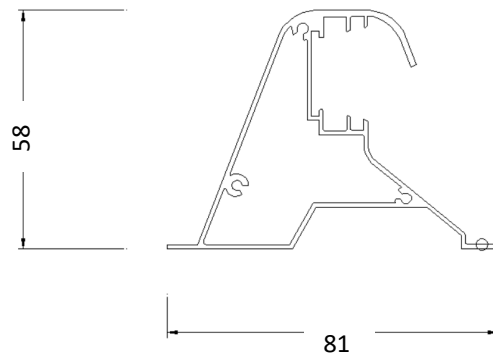

Photometric Data

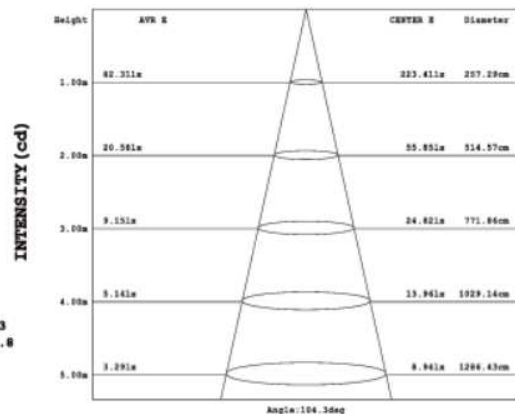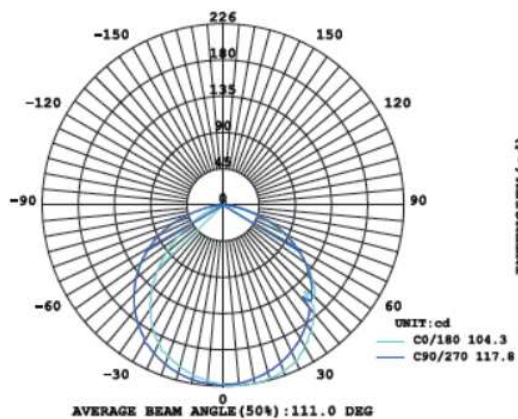

LINEAR LIGHT

나라장터 식별번호
24718350 / 24718364 / 24718336


ON-L051 / L052 / L053



SPECIFICATIONS



LED Power	14W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	Tunable white 2700-6500K
Output (Lumen)	149/148 / 145 lm/w
IP	65

Dimensions Drawing

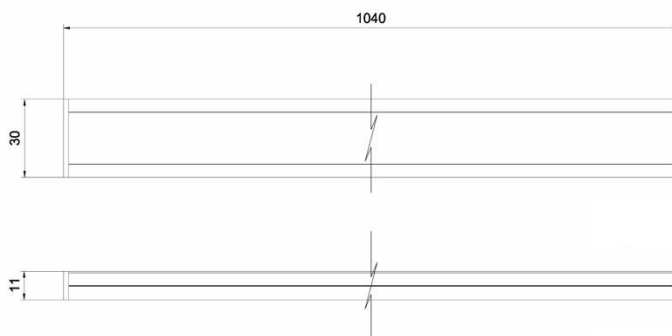

Cover series

Photometric Data

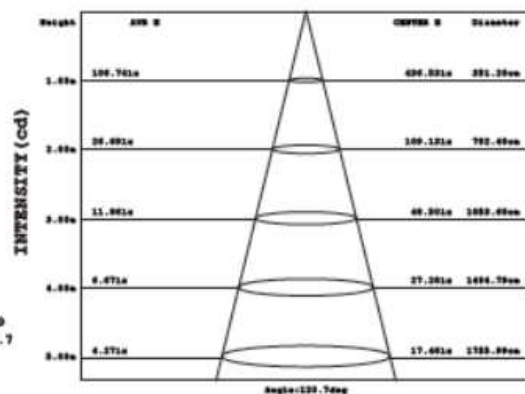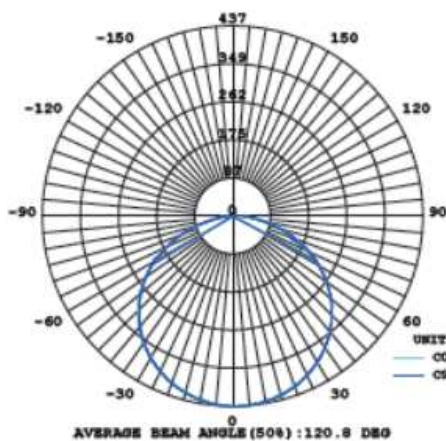

LINEAR LIGHT

나라장터 식별번호
24718342 / 24718356 / 24718328


ON-L021 / L022 / L023



SPECIFICATIONS


LED Power	14.4W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	1800-10000K
Output (Lumen)	174-179 lm /w
IP	65

Dimensions Drawing

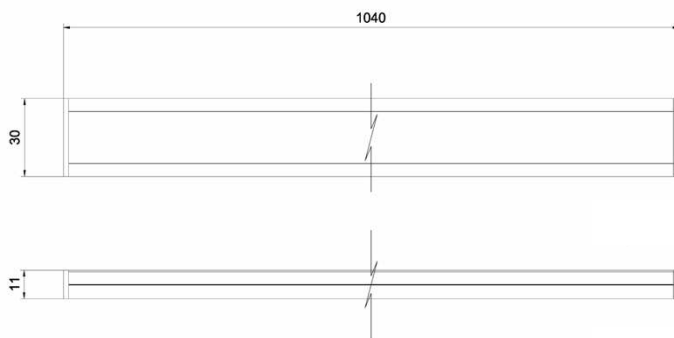


Cover series

Photometric Data

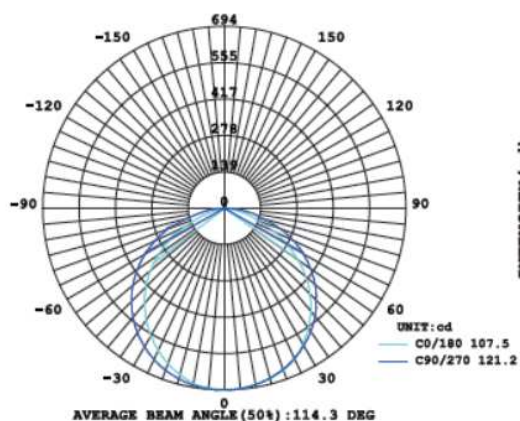

INTENSITY (cd)

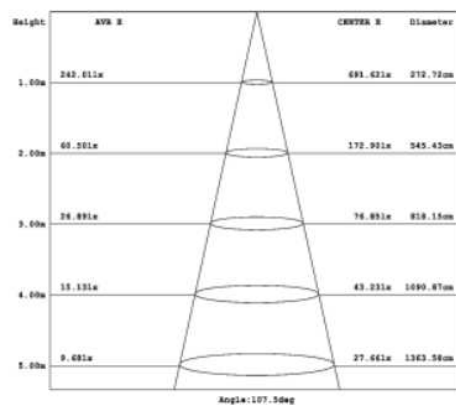

LINEAR LIGHT

나라장터 식별번호
25480422


ON-A026





SPECIFICATIONS

LED Power	15W
Dimensions	1000 x 33 x 72.2mm
Beam Angle	30°, 60°, 15°* 55°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	60 lm /w
IP	66

Dimensions Drawing

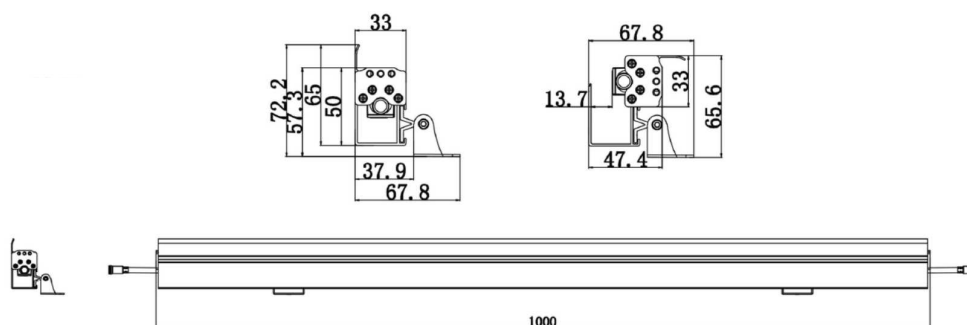

Photometric Data

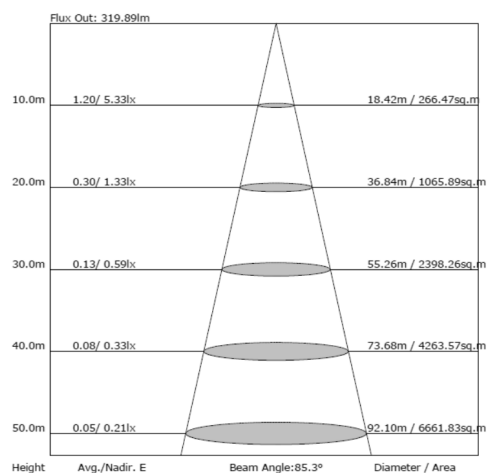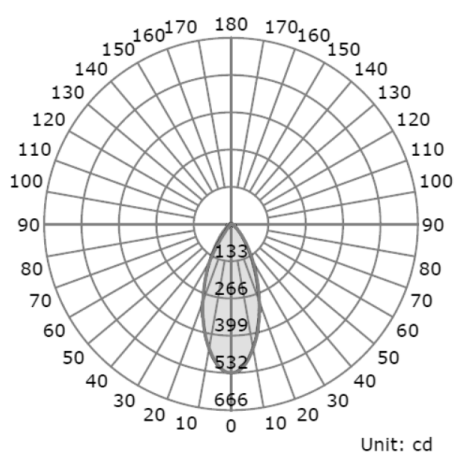

LINEAR LIGHT

나라장터 식별번호
24718348 / 24718362 / 24718334


ON-L045 / L046 / L047



SPECIFICATIONS



LED Power	17W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	100°
CT / Color mixing	RGBWW (2300K+6500K) / (5 in 1)
Output (Lumen)	64 lm /w
IP	65

Dimensions Drawing

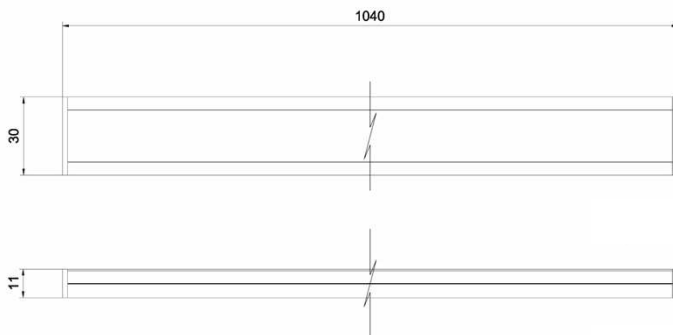

Cover series

Photometric Data

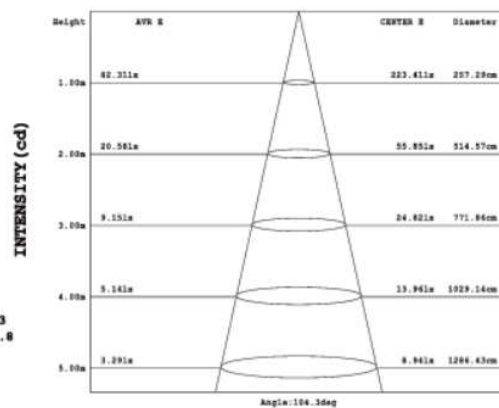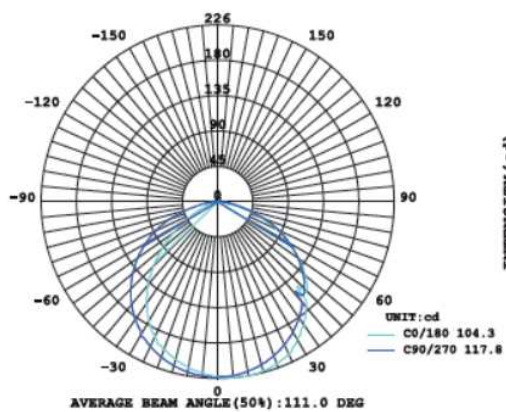

LINEAR LIGHT

나라장터 식별번호
24718377 / 24718376 / 24718375


ON-L039 / L040 / L041



SPECIFICATIONS



LED Power	16W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	110°
CT / Color mixing	RGBW (4 in 1)
Output (Lumen)	52 lm /w
IP	65

Dimensions Drawing

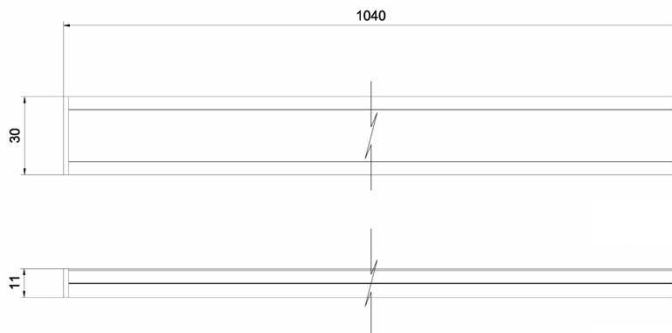

Cover series

Photometric Data

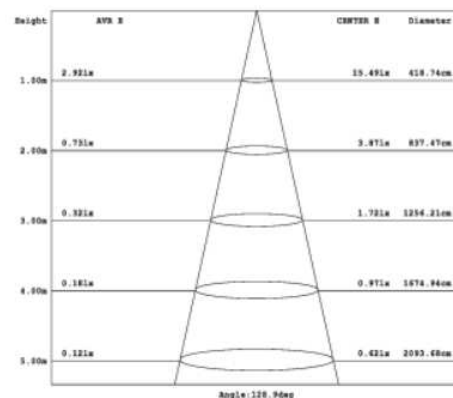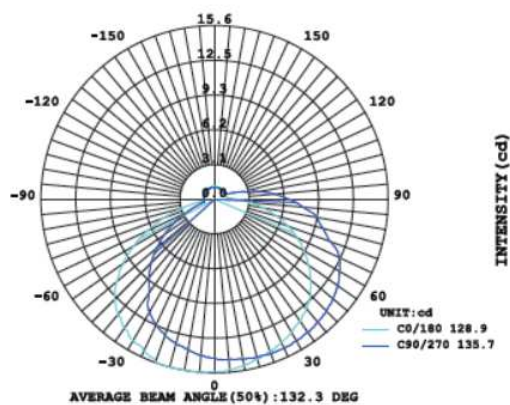

LINEAR LIGHT

나라장터 식별번호
24718346 / 24718360 / 24718332


ON-L033 / L034 / L035



SPECIFICATIONS



LED Power	18W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	174-179 lm /w
IP	65

Dimensions Drawing

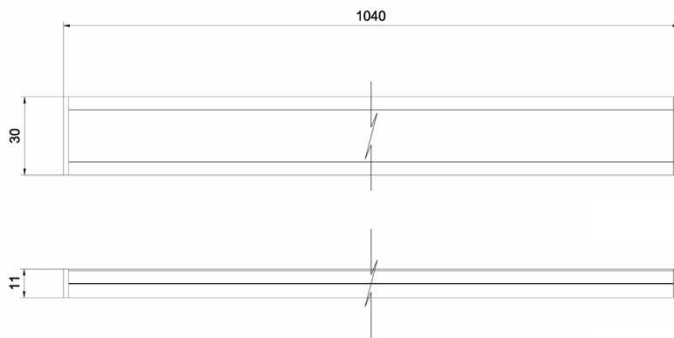

Cover series

Photometric Data

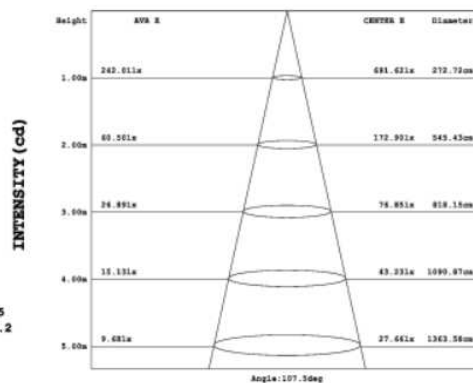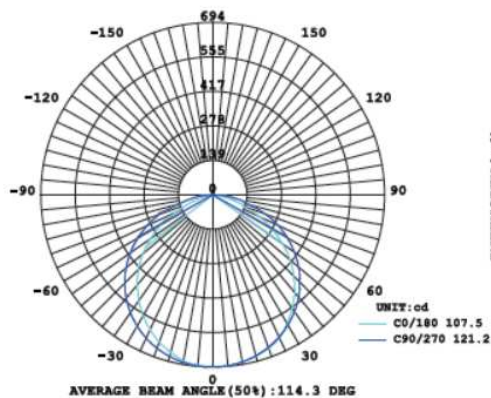

LINEAR LIGHT

나라장터 식별번호
24718354 / 24718368 / 24718340


ON-L063 / L064 / L065



SPECIFICATIONS



LED Power	18W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	180°
CT / Color mixing	COB TYPE (No dors) / 2700-6000K
Output (Lumen)	74-78 lm /w
IP	65

Dimensions Drawing

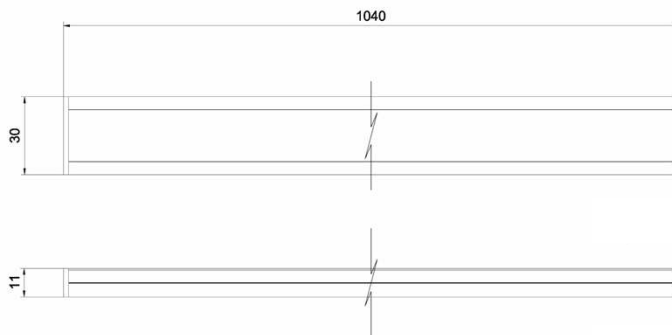

Cover series

Photometric Data

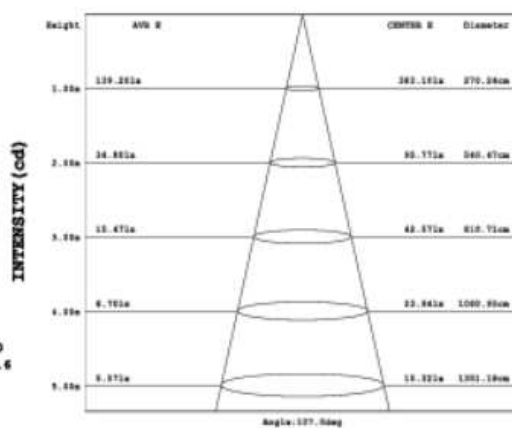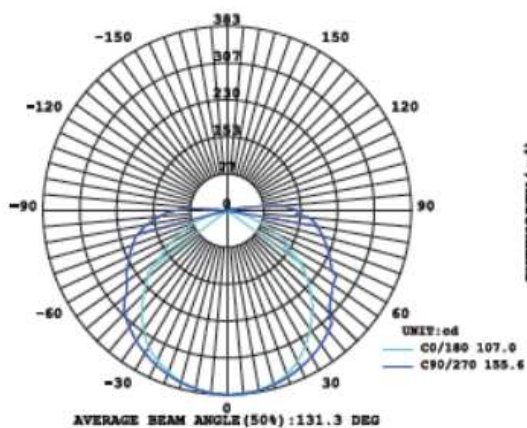

LINEAR LIGHT

나라장터 식별번호
24718351 / 24718365 / 24718337


ON-L054 / L055 / L056



SPECIFICATIONS



LED Power	21W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	120°
CT / Color mixing	Tunable white 2700-6500K
Output (Lumen)	110-116 lm /w
IP	65

Dimensions Drawing

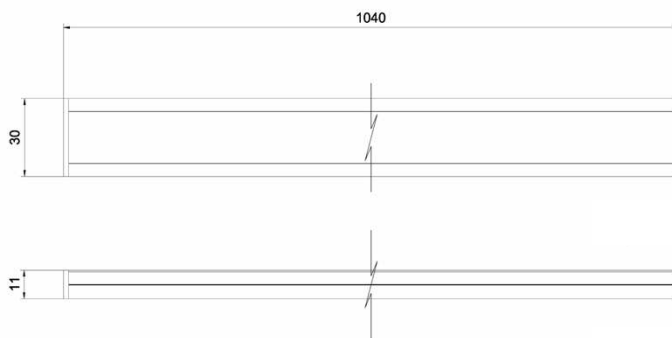

Cover series

Photometric Data

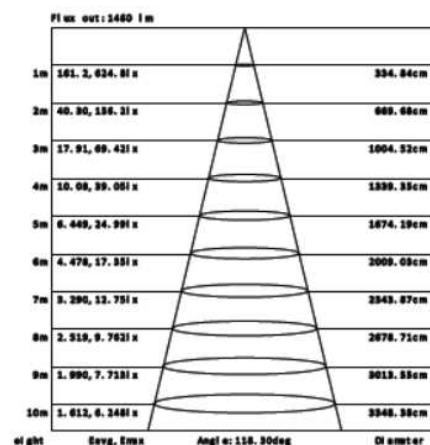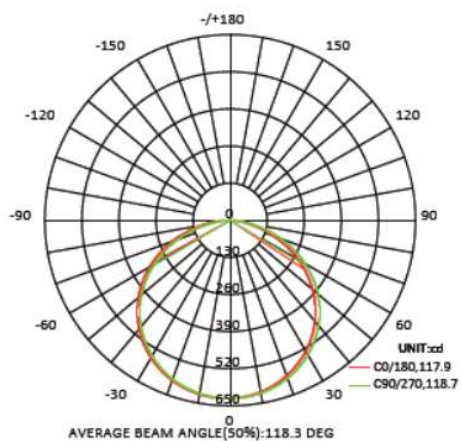

LINEAR LIGHT

나라장터 식별번호
24718347 / 24718361 / 24718333


ON-L042 / L043 / L044



SPECIFICATIONS



LED Power	24W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	110°
CT / Color mixing	RGB+WW + CW
Output (Lumen)	81-86 lm /w
IP	65

Dimensions Drawing

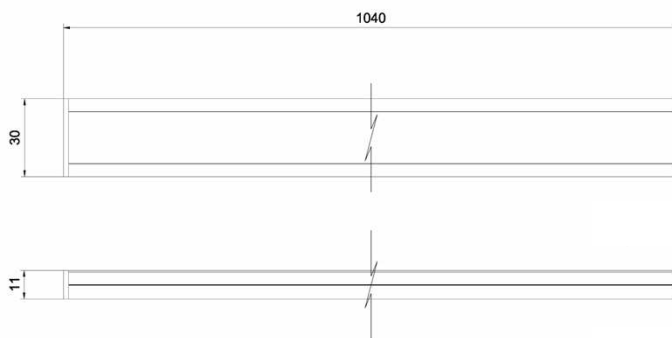

Cover series

Photometric Data

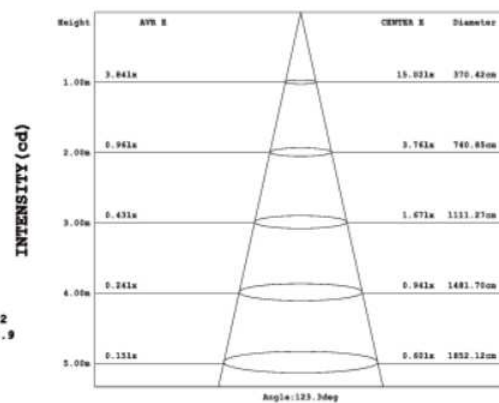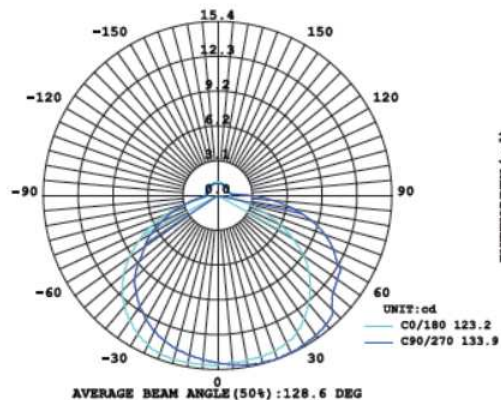

LINEAR LIGHT

나라장터 식별번호
25480517 / 25480518 / 25480519


ON-A103 / A104 / LA105



SPECIFICATIONS



LED Power	22W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	100°
CT / Color mixing	RGBW (4 in 1)
Output (Lumen)	63-70 lm /w
IP	65

Dimensions Drawing

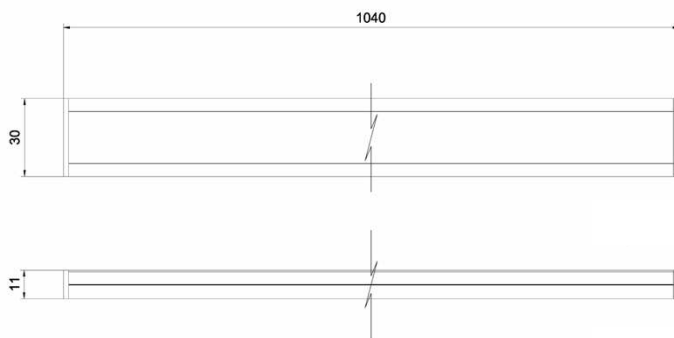

Cover series

Photometric Data

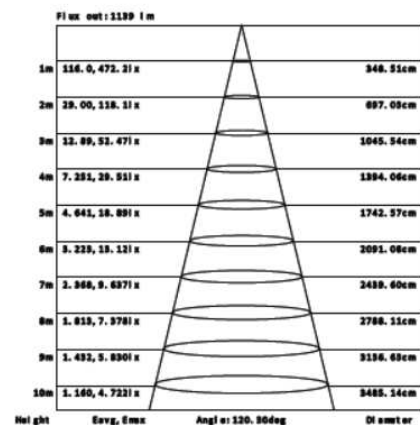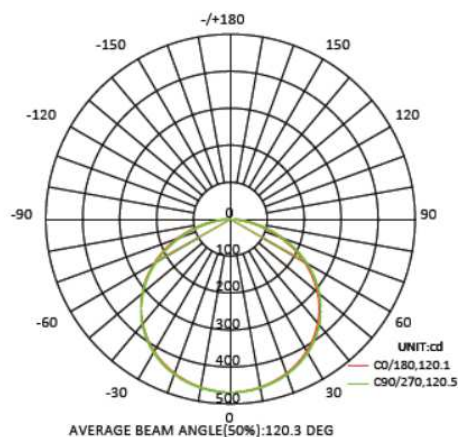

LINEAR LIGHT

나라장터 식별번호
25480520 / 25480521 / 25480522


ON-A106 /A107 / A108



SPECIFICATIONS


LED Power	28W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	110°
CT / Color mixing	RGBW (DIGITAL DMX)
Output (Lumen)	R (16), G(44), B(10), W(47), EGBW(40) lm /w
IP	65

Dimensions Drawing

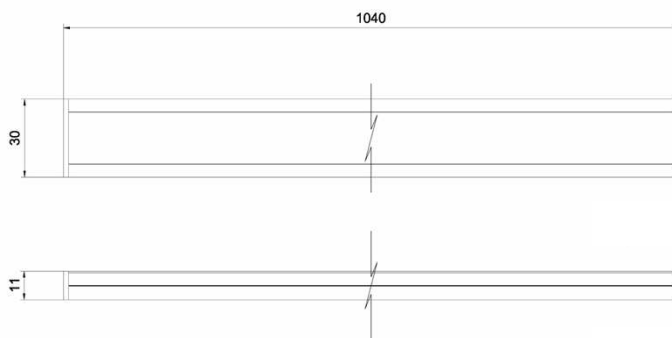

Cover series

XC connect with DMX pixel strip

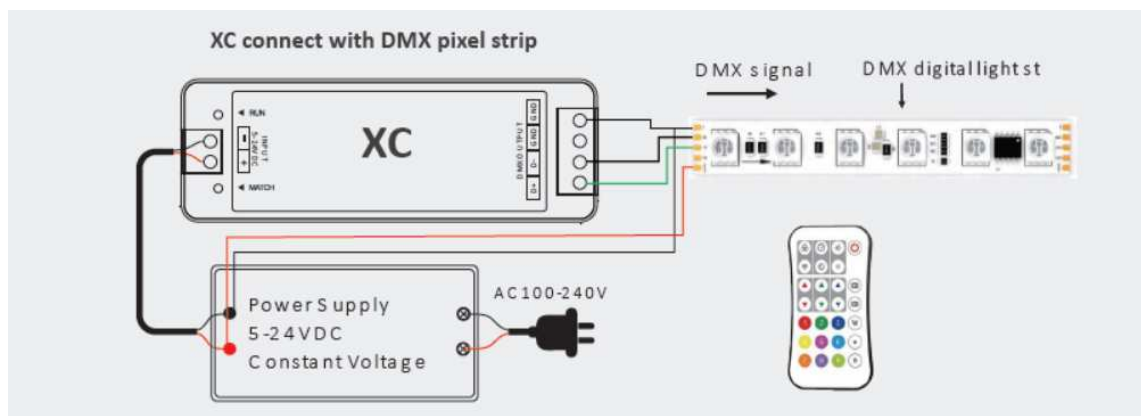

LINEAR LIGHT

나라장터 식별번호
24718317 / 24718318


ON-L008 / L009




SPECIFICATIONS

LED Power	10W (TOP / SIDE)
Dimensions	1000x 16.5 x 16.5 mm
Beam Angle	120°
CT / Color mixing	2200-6500K / tunable white / RGB/
Output (Lumen)	40-745 lm
IP	65

Dimensions Drawing

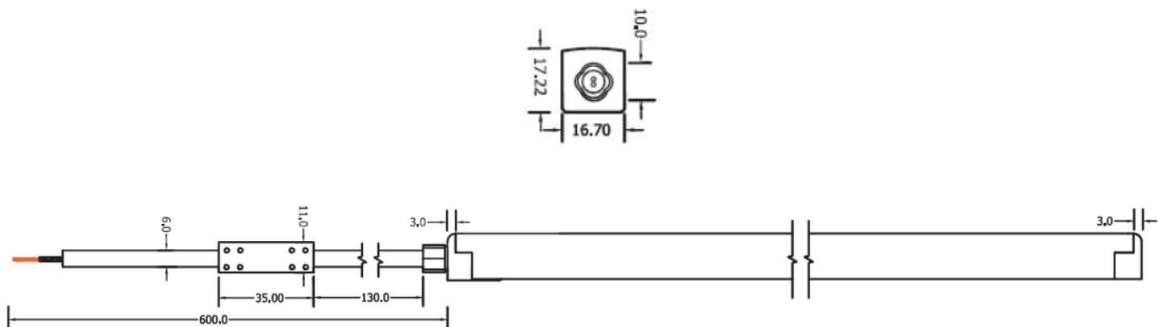

Photometric Data

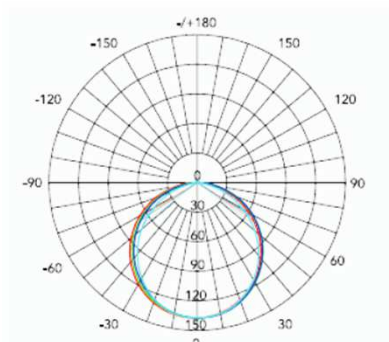

Lumen

Color&Lumen

G	B	P	R	A	O
330lm	60lm	180lm	120lm	110lm	290lm

CCT&Lumen

2200K	2700K	3000K	3500K	4000K	4500K	5000K	6500K
360lm	360lm	360lm	380lm	380lm	400lm	400lm	400lm

CCT&Lumen

2200K	5700K	2700K	5700K	3000K	5700K
320lm	410lm	330lm	410lm	340lm	410lm

Color&Lumen



R [70 lm] G [200 lm] B [60 lm] W [300 lm]

LINEAR LIGHT

나라장터 식별번호
24695135


ON-L007




SPECIFICATIONS

LED Power	12W
Dimensions	1000x 11.5 x 21 mm
Beam Angle	120°
CT / Color mixing	2200-6500K / tunable white / RGB/
Output (Lumen)	25-460 lm
IP	65

Dimensions Drawing

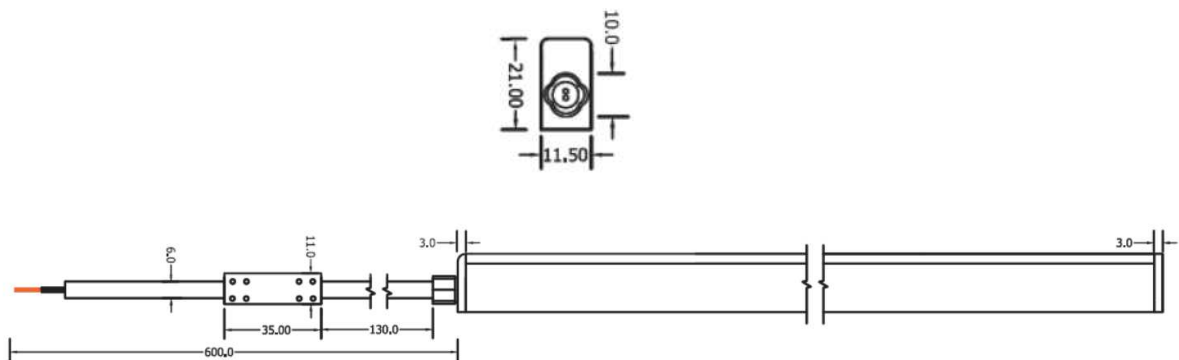

Photometric Data



Lumen

Color&Lumen

G	B	LY	P
260lm	30lm	250lm	150lm

CCT&Lumen

2200K	2700K	3000K	3500K	4000K	4500K	5000K	6500K
250lm	250lm	250lm	270lm	270lm	290lm	290lm	290lm

CCT&Lumen

2200K + 5700K	2700K + 5700K	3000K + 5700K
210lm	240lm	220lm
240lm	240lm	230lm

CCT&Lumen

RGB	R [45 lm]	G [130 lm]	B [30 lm]	W [190 lm]
-----	-------------	--------------	-------------	--------------

LINEAR LIGHT



On-L094




SPECIFICATIONS

LED Power	12W
Dimensions	1000x 16.5 x 16.5 mm
Beam Angle	120°
CT / Color mixing	2200-6500K / tunable white
Output (Lumen)	30-700 lm
IP	66

Dimensions Drawing

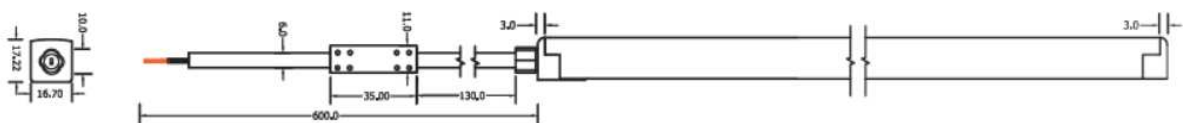

Photometric Data



Lumen

CCT&Lumen

2200K + 5700K
350lm + 380lm

2700K + 5700K
300lm 380lm

3000K	+	5700K
330lm		380lm

LINEAR LIGHT

나라장터 식별번호
24888509 / 24888510 / 24888511


ON-L091 / L092 / L093




SPECIFICATIONS

LED Power	12W / 17W / 18W (3 SIDE)
Dimensions	1000x 16.5 x 16.5 mm
Beam Angle	120°
CT / Color mixing	Tunable White / Multi RGBW / RGBW DMX Pixel
Output (Lumen)	45-700 lm
IP	66

Dimensions Drawing

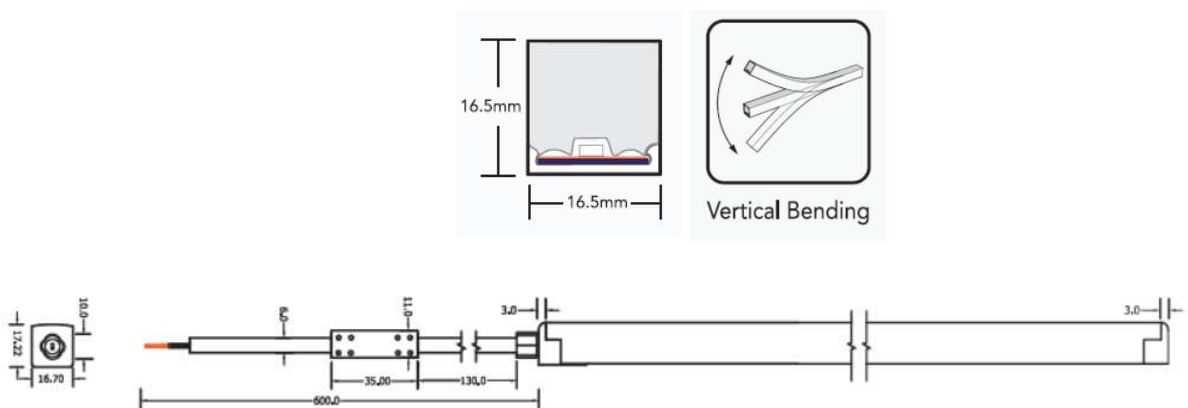

Photometric Data

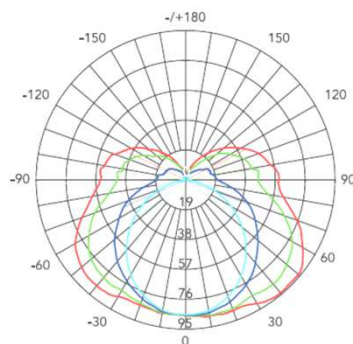

Lumen

2200K	+	5700K	2700K	+	5700K	3000K	+	5700K
420lm		470lm	430lm		470lm	440lm		470lm
RGB R [70 lm] G [280 lm] B [60 lm] W [460 lm] +								
2700K 3000K 4000K 5000K								
300lm 310lm 320lm 330lm								
RGB R [80 lm] G [270 lm] B [60 lm] W [680 lm] +								
2700K 3000K 4000K 5000K								
290lm 300lm 310lm 320lm								

LINEAR LIGHT

나라장터 식별번호
24888503 / 24888504


ON-L089 / L090




SPECIFICATIONS

LED Power	10W / 13W
Dimensions	1000x 13.5 x 13.5 mm
Beam Angle	120°
CT / Color mixing	2200K-6500K / Multi RGB /
Output (Lumen)	40-530 lm
IP	66

Dimensions Drawing

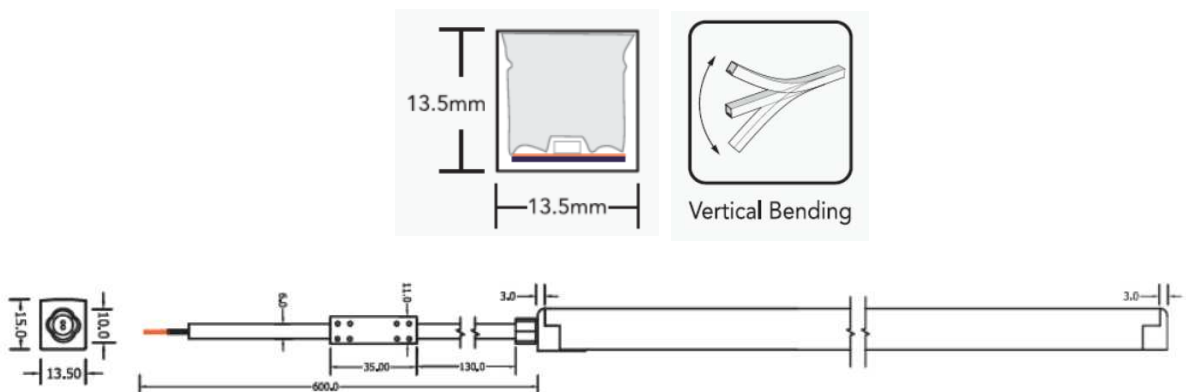

Photometric Data



Lumen

CCT&Lumen

2200K	2700K	3000K	3500K	4000K	4500K	5000K	6500K
430lm	430lm	430lm	450lm	450lm	470lm	470lm	470lm



R [60 lm] G [150 lm] B [40 lm] W [210 lm]

LINEAR LIGHT

나라장터 식별번호
24888500 / 24888501 / 24888502


ON-L086 / L087 / L088




SPECIFICATIONS

LED Power	12W / 17W / 18W
Dimensions	1000x 16.5 x 16.5 mm
Beam Angle	120°
CT / Color mixing	Tunable White / Multi RGBW / RGBW DMX Pixel
Output (Lumen)	40-530 lm
IP	66

Dimensions Drawing

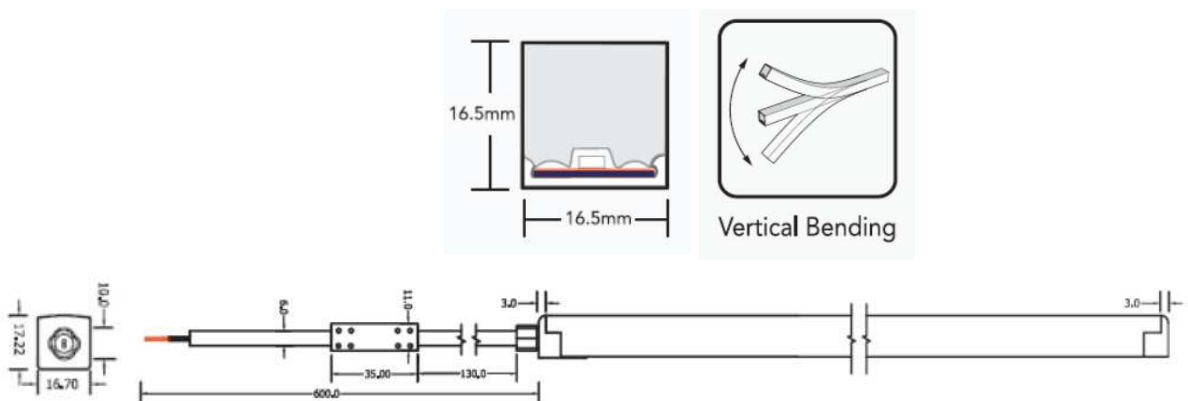

Photometric Data




Lumen

2200K 320lm	+	5700K 410lm	2700K 330lm	+	5700K 410lm	3000K 340lm	+	5700K 410lm
 RGB R [50 lm] G [180 lm] B [40 lm] W [380 lm]	+	2700K 200lm	3000K 220lm	4000K 240lm	5000K 250lm			
 RGB R [60 lm] G [190 lm] B [50 lm] W [410 lm]	+	2700K 180lm	3000K 190lm	4000K 200lm	5000K 210lm			

LINEAR LIGHT

나라장터 식별번호
24888497 / 24888498 / 24888499


ON-L083 / L084 / L085

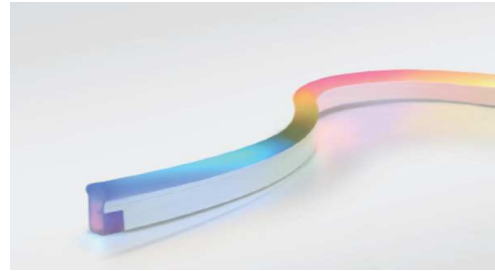


SPECIFICATIONS

LED Power	12W / 17W / 15W
Dimensions	1000x 11.5 x 28 mm
Beam Angle	120°
CT / Color mixing	Multi RGBW / RGBW DMX Pixel
Output (Lumen)	17-450 lm
IP	66

Dimensions Drawing

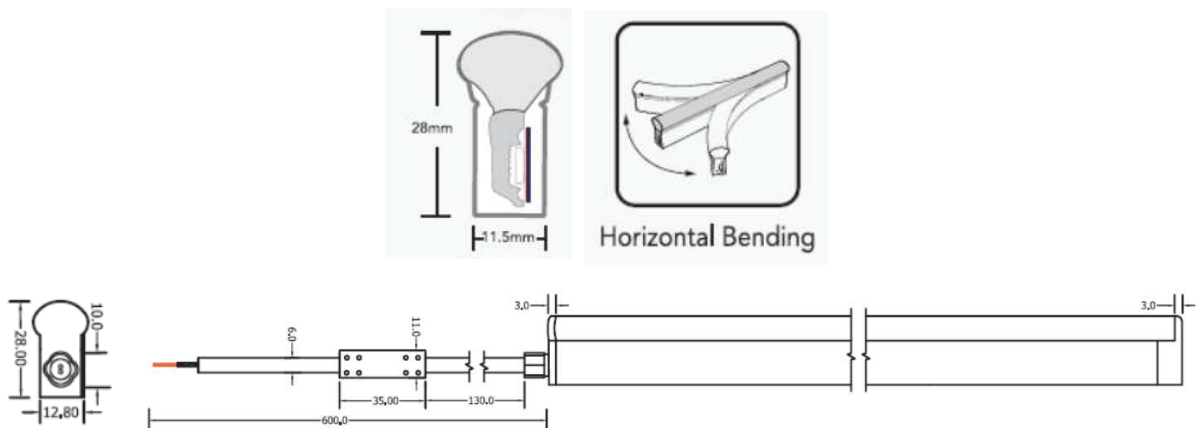

Photometric Data



Lumen

CCT&Lumen

2200K	2700K	3000K	3500K	4000K	4500K	5000K	6500K
250lm	250lm	250lm	270lm	270lm	300lm	300lm	300lm



R [25 lm] G [90 lm] B [20 lm] W [250 lm] + 2700K 3000K 4000K 5000K
120lm 130lm 140lm 150lm



R [35 lm] G [110 lm] B [30 lm] W [260 lm] + 2700K 3000K 4000K 5000K
80lm 90lm 100lm 110lm

LINEAR LIGHT

나라장터 식별번호
24888495 / 24888496


ON-L081 / L082




SPECIFICATIONS

LED Power	17W / 15W
Dimensions	1000x 11.5 x 21 mm
Beam Angle	120°
CT / Color mixing	Multi RGBW / RGBW DMX Pixel
Output (Lumen)	25-460 lm
IP	66

Dimensions Drawing

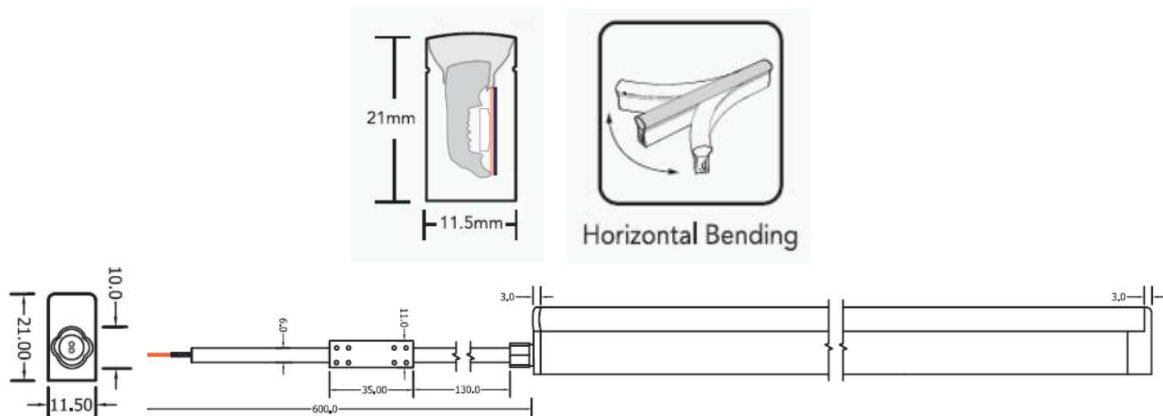

Photometric Data



Lumen



R [30 lm] G [100 lm] B [25 lm] W [300 lm] +

2700K 3000K 4000K 5000K
130lm 140lm 150lm 160lm



R [60 lm] G [170 lm] B [40 lm] W [240 lm] +

2700K 3000K 4000K 5000K
90lm 100lm 110lm 120lm

LINEAR LIGHT

나라장터 식별번호
25480493 / 25480459 / 25480463



ON-A068 / A069 / A070




SPECIFICATIONS

LED Power	18W / 19W / 23W
Dimensions	1000x 18 x 18 mm
Beam Angle	15°, 20°, 25°, 38°, 60°, 20°*40°
CT / Color mixing	Tunable White / RGBW Pixel
Output (Lumen)	88-1147 lm
IP	66

Dimensions Drawing

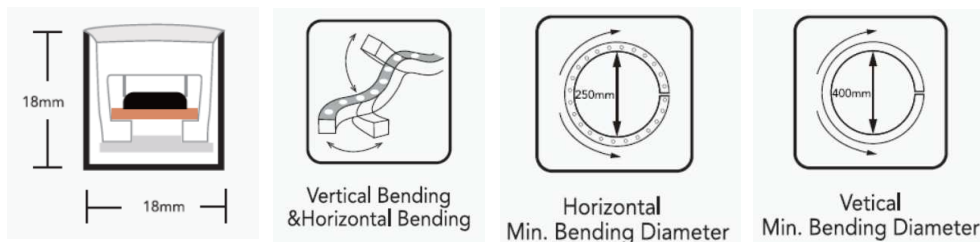

Photometric Data



Lumen

2700K + 6000K

SFW20-24V-3535-24RGB

R [88 lm] G [248 lm] B [138 lm]

SFW20-24V-3535-24-SPI4-RGBW (3000K)

R [88 lm] G [248 lm] B [138 lm] RGBW [515 lm] 3000K [188 lm]

LINEAR LIGHT

나라장터 식별번호
2548024 / 25480425


ON-A028 / A029





SPECIFICATIONS

LED Power	18W / 15W
Dimensions	1000 x 45 x 116mm / 1000 x 33 x 68.6mm
Beam Angle	30°, 60°, 15°* 55° / 15°* 18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	155 lm / w
IP	66

Dimensions Drawing

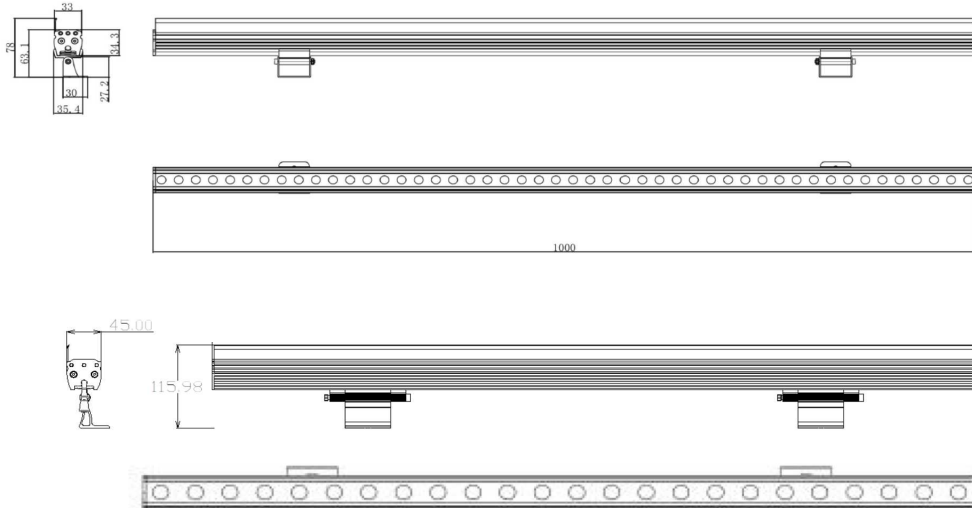

Photometric Data

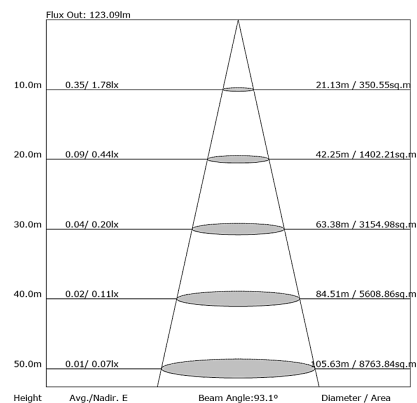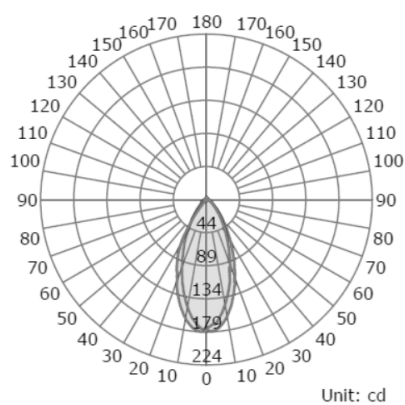

LINEAR LIGHT

나라장터 식별번호
24719688


ON-L012




SPECIFICATIONS

LED Power	18W
Dimensions	1000 x 40 x 26mm
Beam Angle	8°, 10°, 15°, 30°, 45°, 10*60°
CT / Color mixing	2200K / 3000K / 4000K / RGB / RGBW
Output (Lumen)	1440 lm
IP	65

Dimensions Drawing

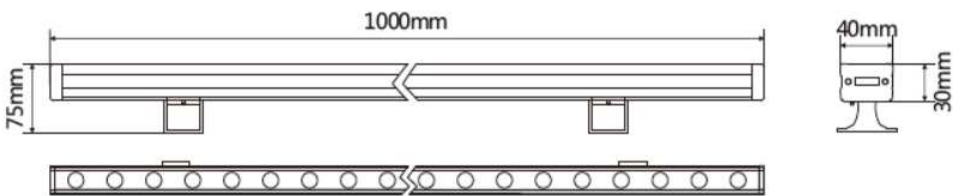

Photometric Data

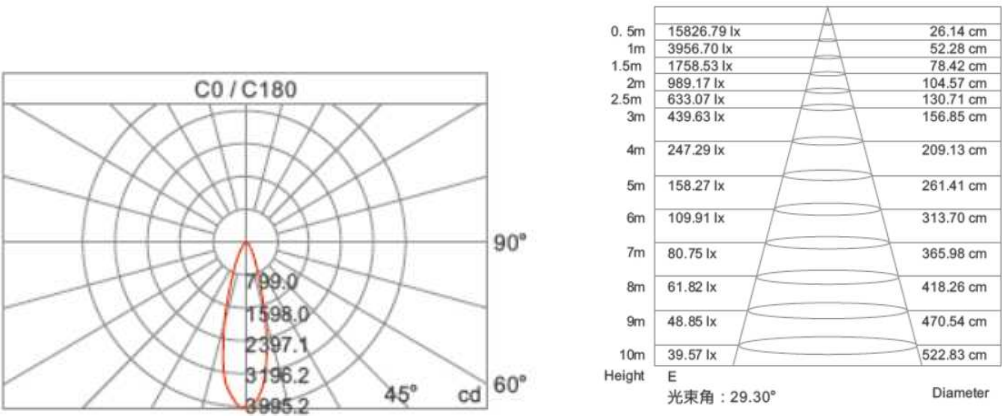

LINEAR LIGHT

나라장터 식별번호
25480415


ON-A025





SPECIFICATIONS

LED Power	18W
Dimensions	1000 x 45 x 114.5mm
Beam Angle	15°X18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	112 lm /w
IP	66

Dimensions Drawing

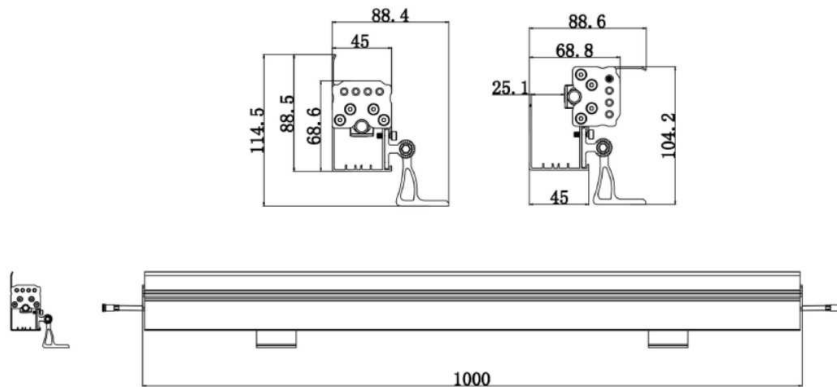

Photometric Data

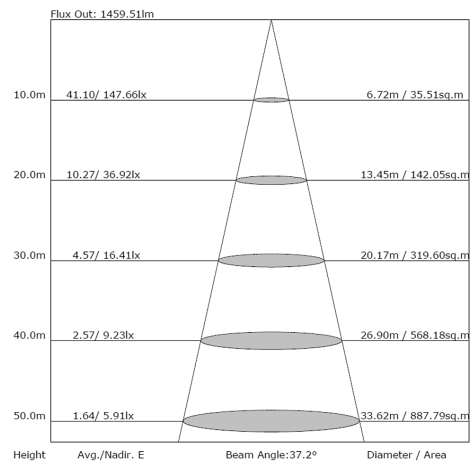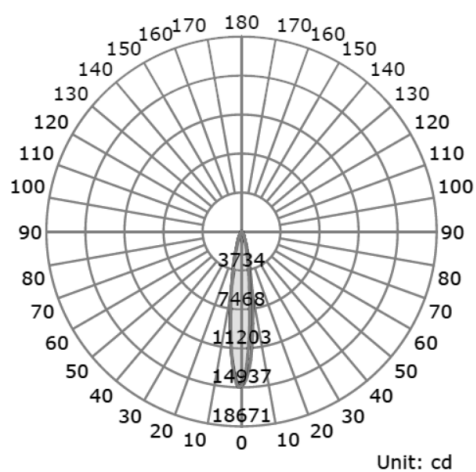

LINEAR LIGHT

나라장터 식별번호
25480408


ON-A018





SPECIFICATIONS

LED Power	24W
Dimensions	339 x 80 x 133mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	1736 lm
IP	66

Dimensions Drawing

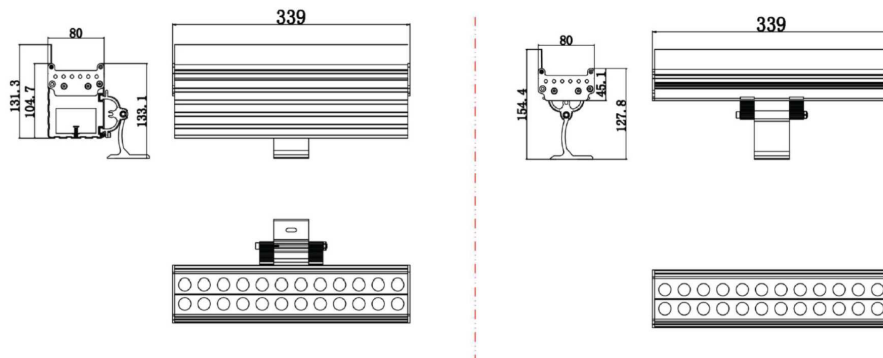

Photometric Data

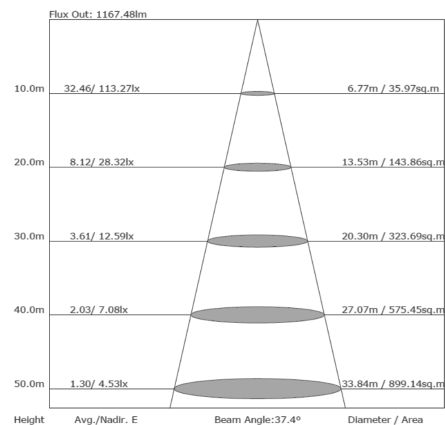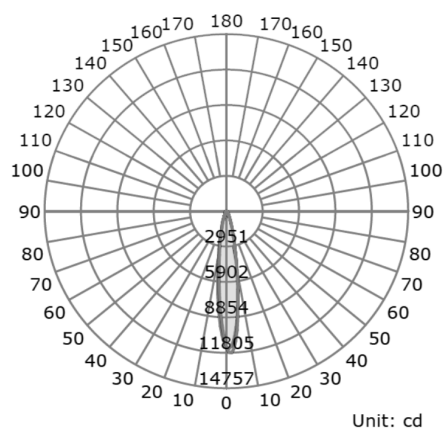

LINEAR LIGHT

나라장터 식별번호
25480523 / 25480524 / 25480525


ON-A109 / A110 / A111



SPECIFICATIONS



LED Power	30W
Dimensions	1040 x 30 x 11 mm 1040 x 22 x 15 mm 1040 x 21 x 20 mm
Beam Angle	100°
CT / Color mixing	RGBWW (2300K+6500K) / (5 in 1)
Output (Lumen)	87 lm /w
IP	65

Dimensions Drawing

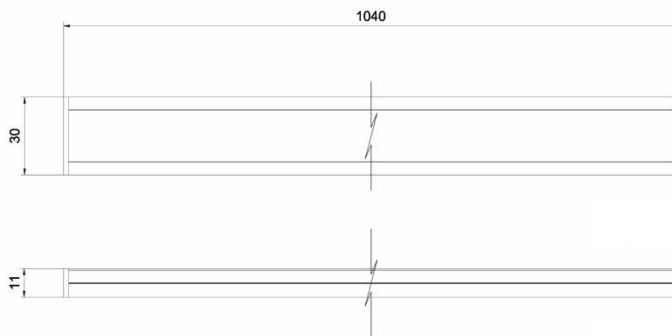

Cover series

Photometric Data

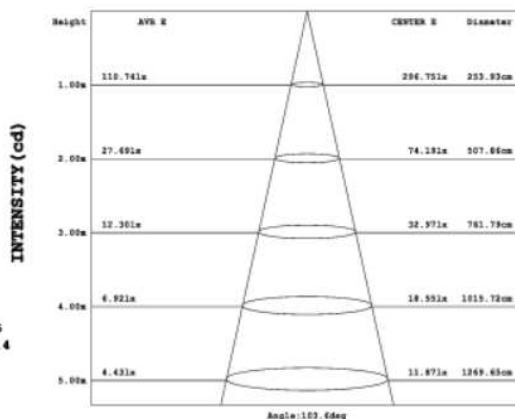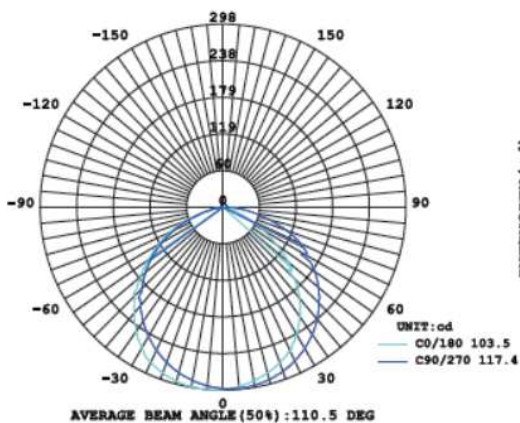

LINEAR LIGHT

나라장터 식별번호
24718370


ON-L-067




SPECIFICATIONS

LED Power	18W
Dimensions	1000 x 45 x 103mm
Beam Angle	12°/24°/30°/40°/60° or Oval lens 15*40°
CT / Color mixing	2700K, 3000K, 4400K, 6000K
Output (Lumen)	1440 lm
IP	65

Dimensions Drawing

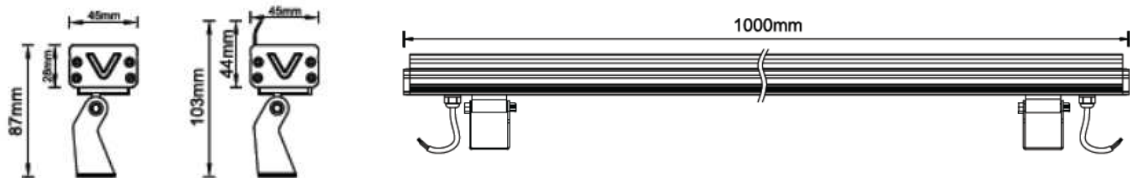

Photometric Data

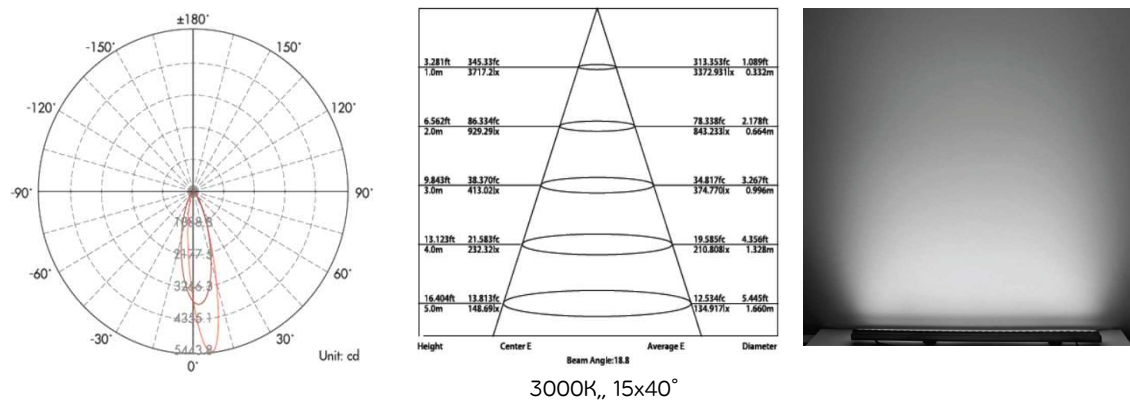

LINEAR LIGHT

나라장터 식별번호
25480424


ON-A028





SPECIFICATIONS

LED Power	18W
Dimensions	1000 x 45 x 116mm
Beam Angle	15°X18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	1870 lm
IP	66

Dimensions Drawing

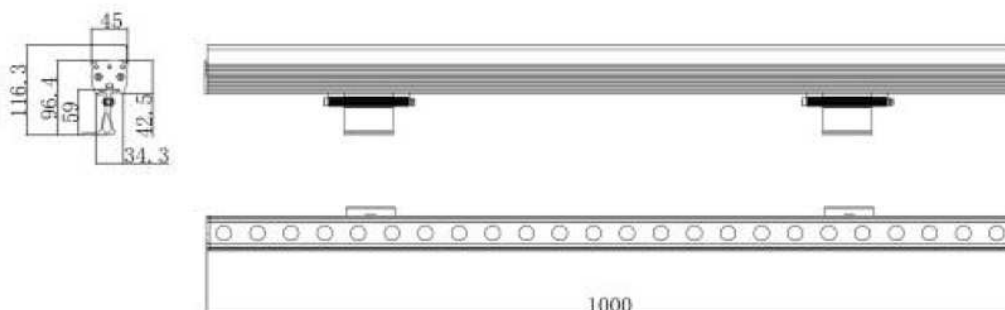

Photometric Data

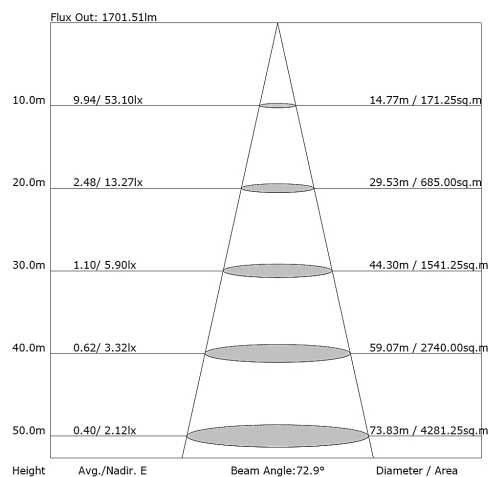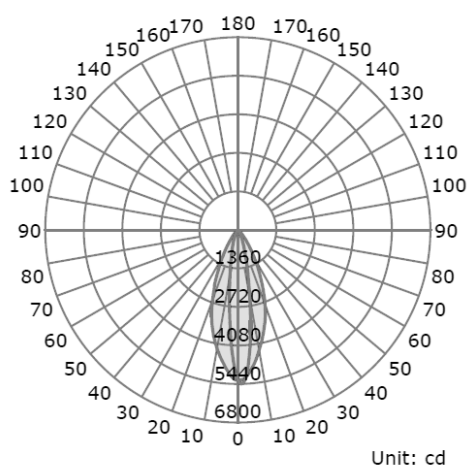

LINEAR LIGHT

나라장터 식별번호
25480396


ON-A006



SPECIFICATIONS


LED Power	20W
Dimensions	305 x 65.9 x 60.7mm
Beam Angle (zoom)	Lens Optics: 15° After Diffuser: 25°, 30°, 60°, 10*60°, 15*30°, 15*40°, 30*15°, 30*60°, 40*15°, 60*10°, 60*30°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	863 lm
Weight	1.2 KG
IP	67

Dimensions Drawing

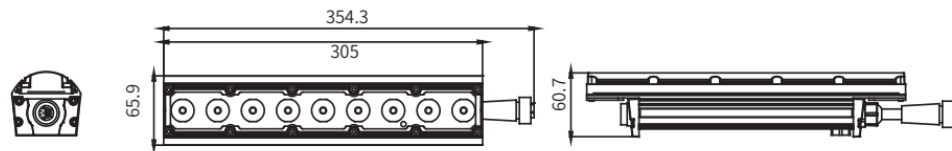

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

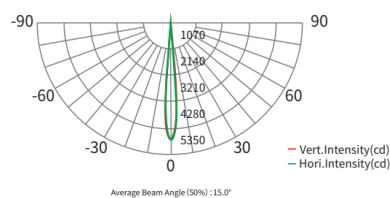

LINEAR LIGHT

나라장터 식별번호
24888536


ON-L-100




SPECIFICATIONS

LED Power	24W
Dimensions	1000 x 63 x 35mm
Beam Angle	20°/30°/40°/ 20*40° / 60°
CT / Color mixing	1800-6000K / RGBW
Output (Lumen)	1040-2350 lm
IP	65

Dimensions Drawing



Photometric Data

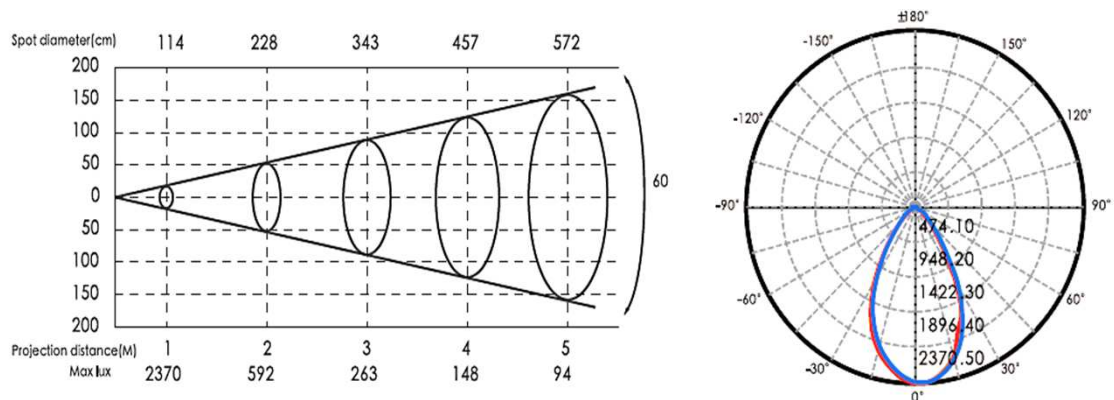

LINEAR LIGHT

나라장터 식별번호
24888517


ON-L-095




SPECIFICATIONS

LED Power	24W
Dimensions	1000 x 29 x 35mm
Beam Angle	10°/15°/30°/45°/10*60°
CT / Color mixing	2200K, 3000K, 4400K, RGB, RGBW
Output (Lumen)	1440 lm
IP	65

Dimensions Drawing

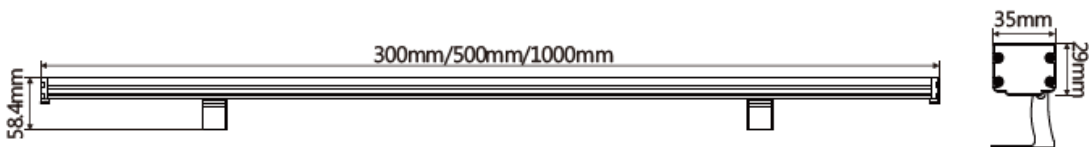

Photometric Data

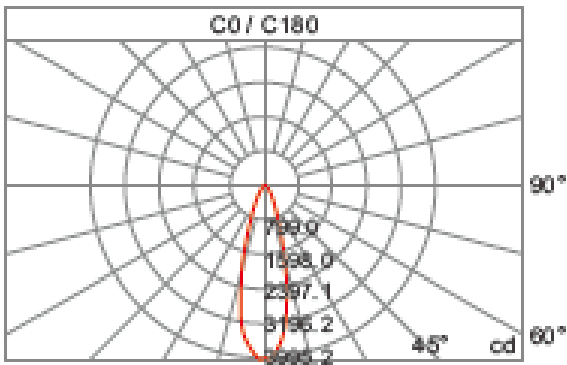

0.5m	15826.79 lx	26.14 cm
1m	3956.70 lx	52.28 cm
1.5m	1758.53 lx	78.42 cm
2m	989.17 lx	104.57 cm
2.5m	633.07 lx	130.71 cm
3m	439.83 lx	156.85 cm
4m	247.29 lx	209.13 cm
5m	158.27 lx	261.41 cm
6m	109.91 lx	313.70 cm
7m	80.75 lx	365.98 cm
8m	61.82 lx	418.26 cm
9m	48.85 lx	470.54 cm
10m	39.57 lx	522.83 cm

Height E
光束角 : 29.30°
Diameter

LINEAR LIGHT

나라장터 식별번호
25480456


ON-A073




SPECIFICATIONS

LED Power	24W
Dimensions	1000 x 25.6 x 22.5 mm
Beam Angle	24°, 30°, 40°, 60°, 25°*45°, 30°*60°
CT / Color mixing	2200-6500K
Output (Lumen)	1304 lm
IP	66

Dimensions Drawing

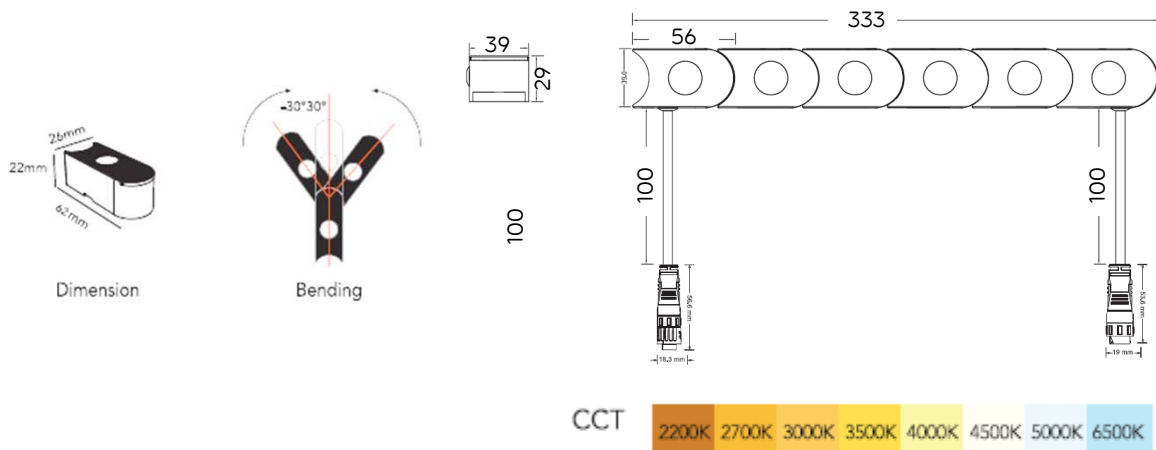

Photometric Data

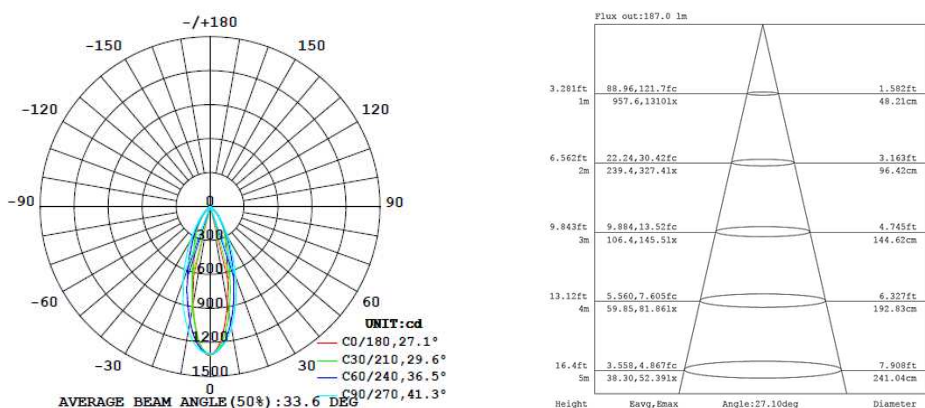

LINEAR LIGHT

나라장터 식별번호
24718369


ON-L066




SPECIFICATIONS

LED Power	24W
Dimensions	1000 x 45 x 103mm
Beam Angle	12°, 24°, 30°* 40°, 60°, 15* 40°
CT / Color mixing	2700K, 3000K, 4500K, 6000K
Output (Lumen)	1800 lm
IP	65

Dimensions Drawing

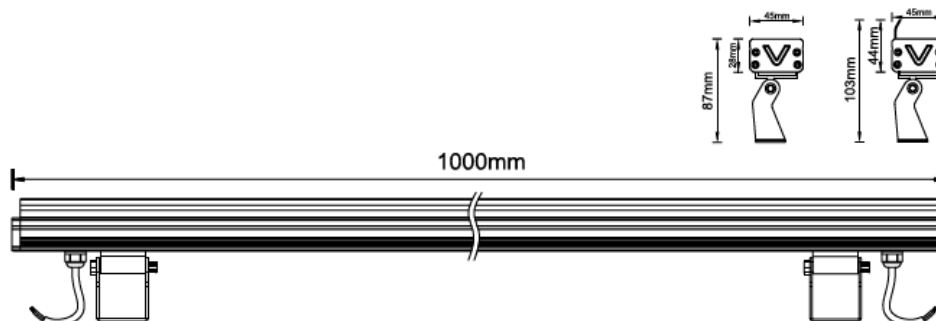

Photometric Data

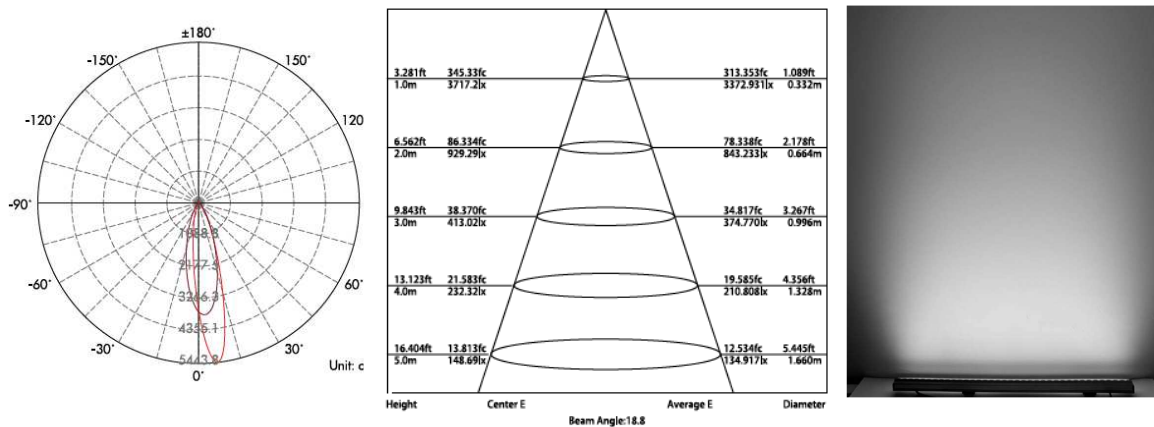

LINEAR LIGHT

나라장터 식별번호
25480507


ON-A093




SPECIFICATIONS

LED Power	24W
Dimensions	1000 x 120 x 40mm
Beam Angle	100°
CT / Color mixing	RGBW(W:3000K,4000K,5700K)
Output (Lumen)	1200 lm
Weight	0.5 KG
IP	67

Dimensions Drawing



Photometric Data

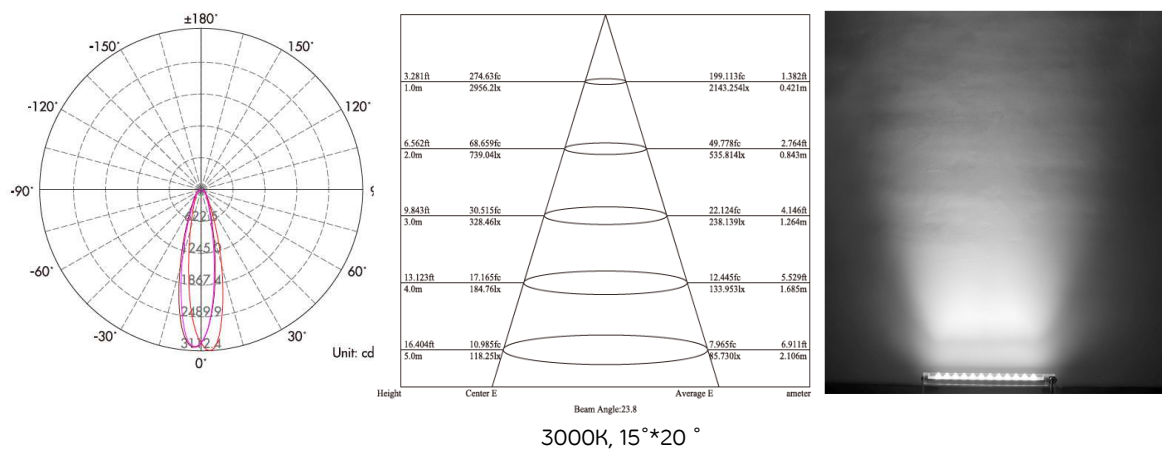

LINEAR LIGHT

나라장터 식별번호
25480423


ON-A027





SPECIFICATIONS

LED Power	36W
Dimensions	1000 x 55 x 116mm
Beam Angle	15°X18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	2754 lm
IP	66

Dimensions Drawing

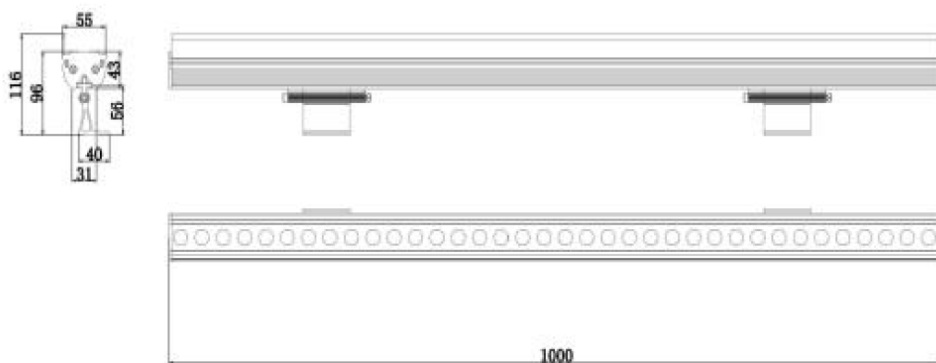

Photometric Data

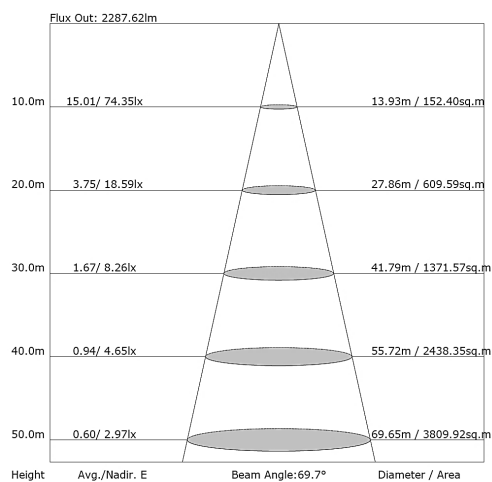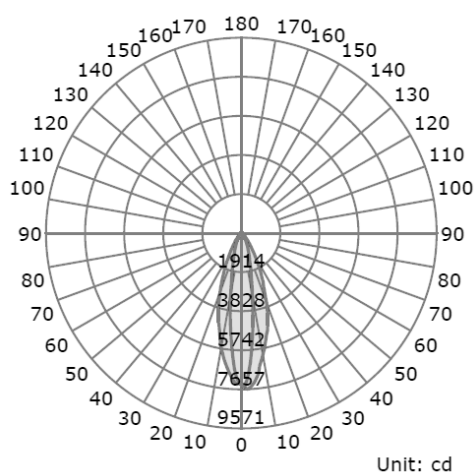

LINEAR LIGHT

나라장터 식별번호
25480414


ON-A024





SPECIFICATIONS

LED Power	36W
Dimensions	1000 x 55 x 119mm
Beam Angle	15°X18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	3033 lm
IP	66

Dimensions Drawing

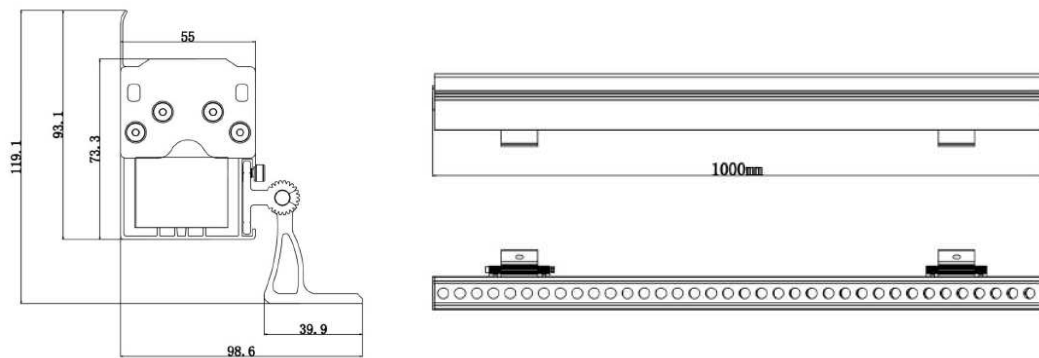

Photometric Data

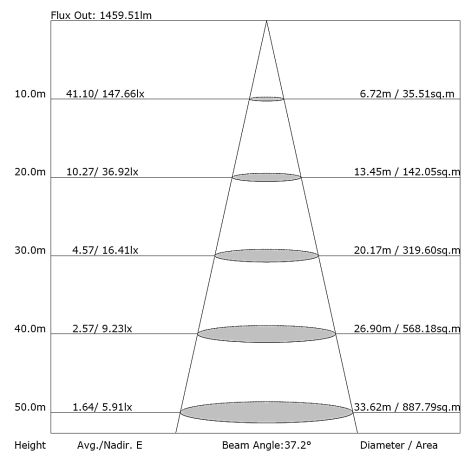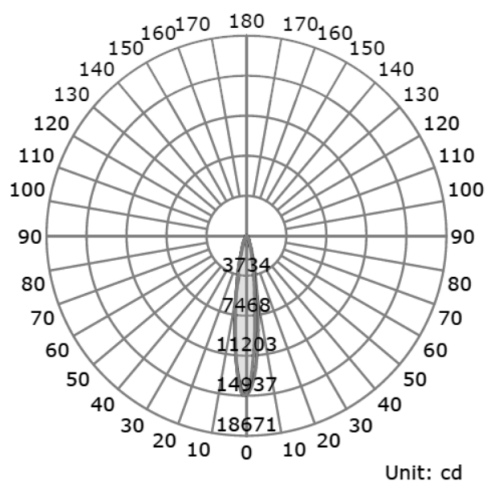

LINEAR LIGHT

나라장터 식별번호
25677658


ON-A146




SPECIFICATIONS

LED Power	36W
Dimensions	1000 x 46 x 26 mm
Beam Angle	100°
CT / Color mixing	RGBW(6500K) + 2700K
Output (Lumen)	87 lm /w
IP	66

Dimensions Drawing

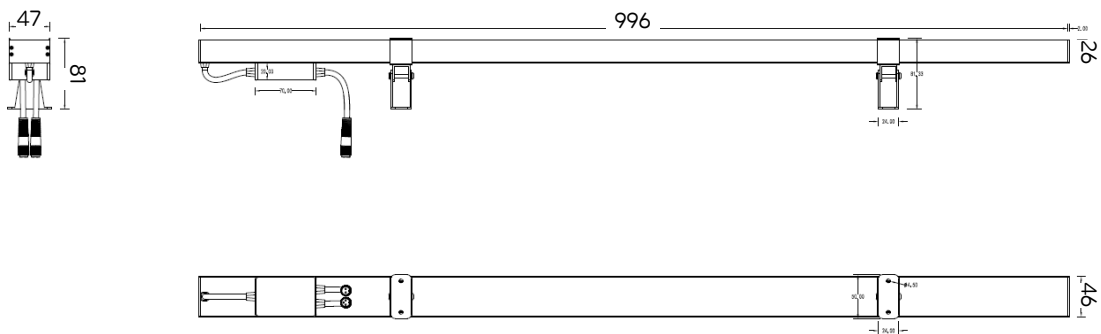


Photometric Data

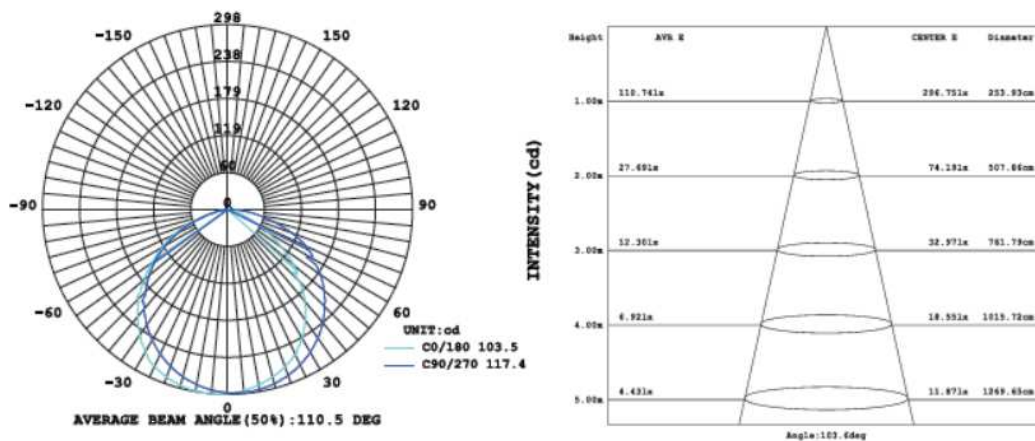

나라장터 식별번호
25480460



LED Power	36W
Dimensions	1000 x 39 x 29 mm
Beam Angle	15°, 20°, 30°, 40°, 10°*15°, 15°*25°, 15°*40°, 25°*45°
CT / Color mixing	2200-6500K
Output (Lumen)	2066 lm
IP	66

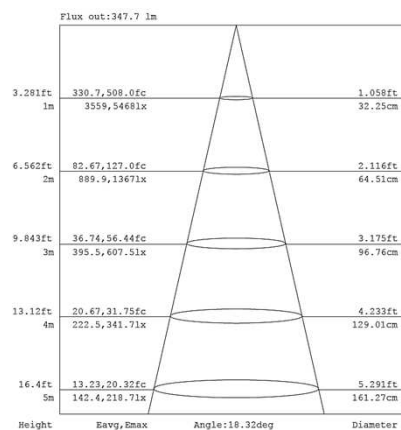

LINEAR LIGHT

나라장터 식별번호
25480397


ON-A007



SPECIFICATIONS


LED Power	40W
Dimensions	610 x 65.9 x 60.7mm
Beam Angle (zoom)	Lens Optics: 15° After Diffuser: 25°, 30°, 60°, 10*60°, 15*30°, 15*40°, 30*15°, 30*60°, 40*15°, 60*10°, 60*30°
CT / Color mixing	Multiple Color (RGLB,,RGBW)
Output (Lumen)	1600 lm
Weight	2.1 KG
IP	67

Dimensions Drawing

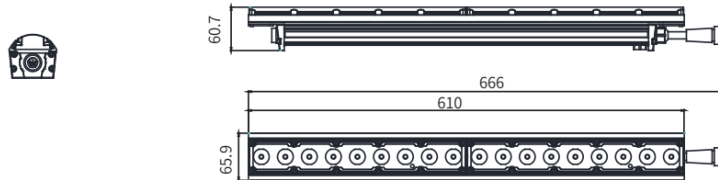

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

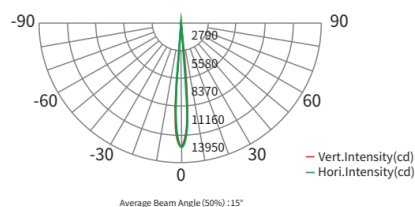

LINEAR LIGHT

나라장터 식별번호
24719690


ON-L-014




SPECIFICATIONS

LED Power	48W
Dimensions	1000 x 70 x 42mm
Beam Angle	10°/15°/30°/45°/10*60°
CT / Color mixing	2200K, 3000K, 4400K, RGB, RGBL
Output (Lumen)	3328 lm
IP	65

Dimensions Drawing

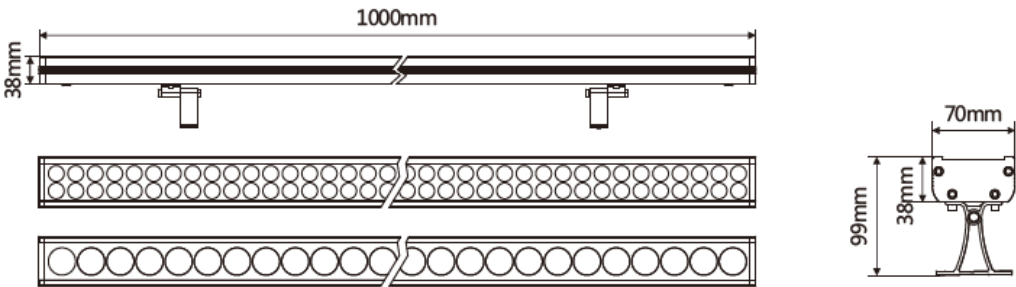

Photometric Data

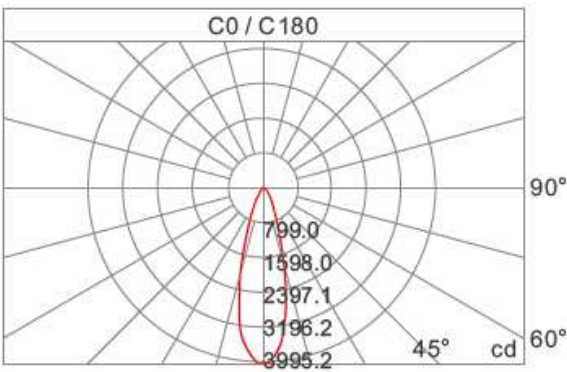

0.5m	15826.79 lx	26.14 cm
1m	3956.70 lx	52.28 cm
1.5m	1758.53 lx	78.42 cm
2m	989.17 lx	104.57 cm
2.5m	633.07 lx	130.71 cm
3m	439.63 lx	156.85 cm
4m	247.29 lx	209.13 cm
5m	158.27 lx	261.41 cm
6m	109.91 lx	313.70 cm
7m	80.75 lx	365.98 cm
8m	61.82 lx	418.26 cm
9m	48.85 lx	470.54 cm
10m	39.57 lx	522.83 cm

Height E
光束角 : 29.30°
Diameter

LINEAR LIGHT

나라장터 식별번호
25480464


ON-A072




SPECIFICATIONS

LED Power	48W
Dimensions	1000 x 39 x 29 mm
Beam Angle	15°, 20°, 30°, 40°, 10°*15°, 15°*25°, 15°*40°, 25°*45°
CT / Color mixing	RGBW
Output (Lumen)	490 lm
IP	66

Dimensions Drawing

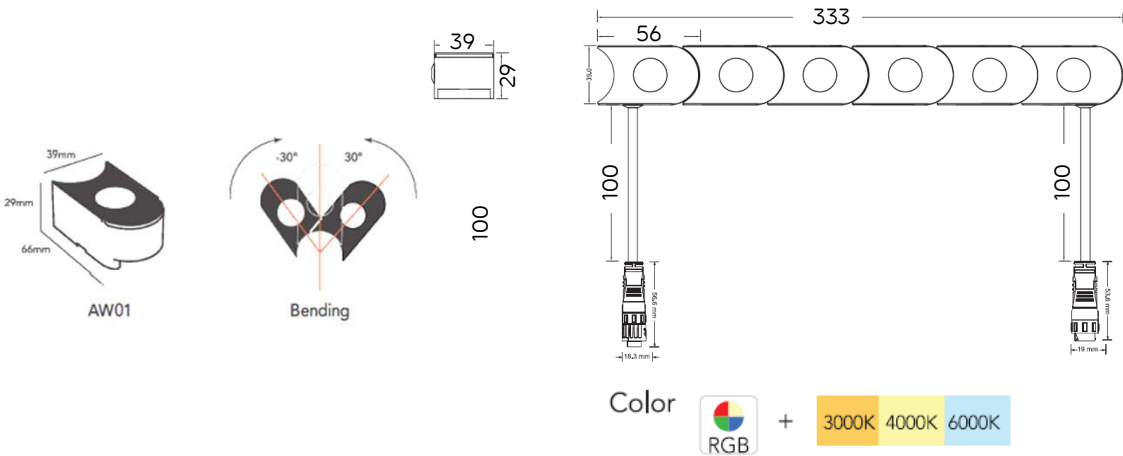

Photometric Data

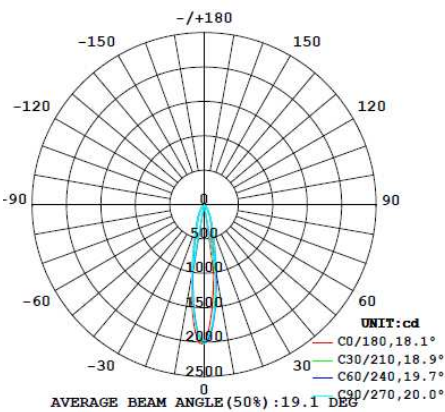

LINEAR LIGHT

나라장터 식별번호
24718371


ON-L068




SPECIFICATIONS

LED Power	48W
Dimensions	1000 x 45 x 103mm
Beam Angle	12°, 24°, 30°* 40°, 60°, 15°* 40°
CT / Color mixing	2700K, 3000K, 4500K, 6000K
Output (Lumen)	3200 lm
IP	65

Dimensions Drawing

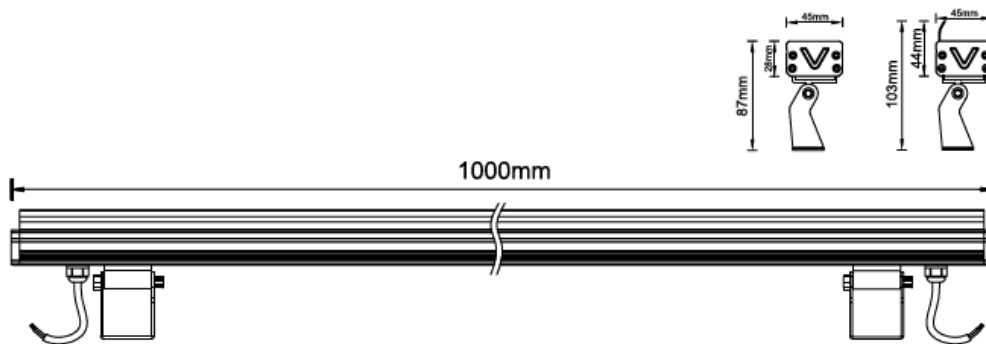

Photometric Data

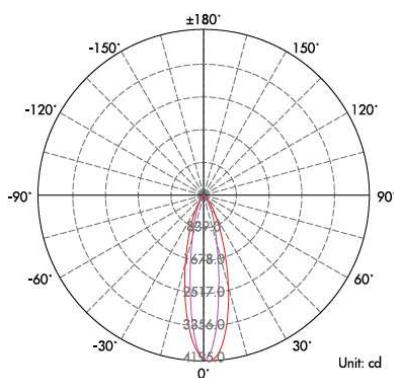

Height	Center E	Average E	Diameter
3.281ft 1.0m	384.73fc 4141.2lx	218.891fc 2356.138lx	1.756ft 0.533m
6.562ft 2.0m	96.183fc 1035.3lx	54.723fc 589.035lx	3.512ft 1.071m
9.843ft 3.0m	42.748fc 460.14lx	24.321fc 261.793lx	5.268ft 1.606m
13.123ft 4.0m	24.046fc 258.83lx	13.681fc 147.259lx	7.025ft 2.141m
16.404ft 5.0m	15.389fc 165.65lx	8.756fc 94.246lx	8.781ft 2.676m



3000K,15x40°

LINEAR LIGHT

나라장터 식별번호
25480413


ON-A023





SPECIFICATIONS

LED Power	60W
Dimensions	1000 x 80 x 133mm
Beam Angle	15°X18°, 10°* 60°, 15°* 45°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	5055 lm
IP	66

Dimensions Drawing

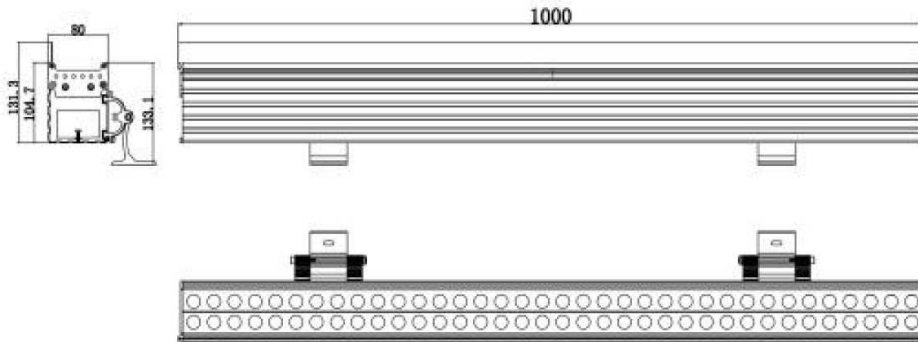

Photometric Data

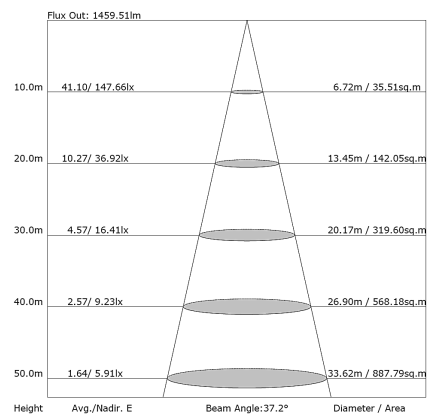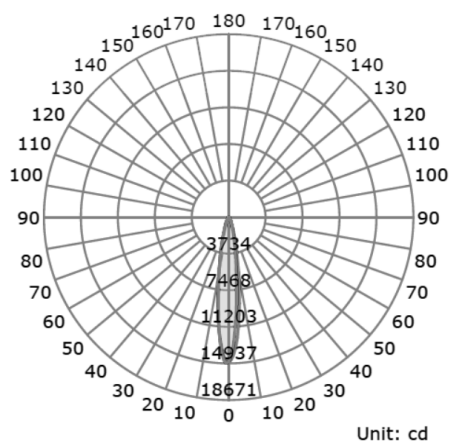

LINEAR LIGHT

나라장터 식별번호
25480398


ON-A008



SPECIFICATIONS


LED Power	60W
Dimensions	915 x 65.9 x 60.7mm
Beam Angle (zoom)	Lens Optics: 15° After Diffuser: 25°, 30°, 60°, 10*60°, 15*30°, 15*40°, 30*15°, 30*60°, 40*15°, 60*10°, 60*30°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	2258 lm
Weight	2.1 KG
IP	67

Dimensions Drawing

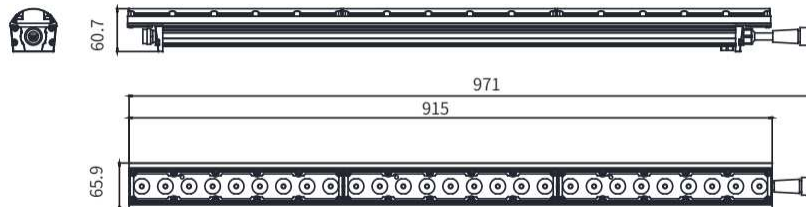

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

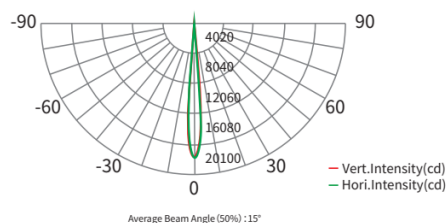

LINEAR LIGHT

나라장터 식별번호
24895354


ON-L102




SPECIFICATIONS

LED Power	128W
Dimensions	1023 x 80 x 153 mm
Beam Angle	20°*30°
CT / Color mixing	1800-8000K / RGBALC or RGBWA
Weight	7 KG
Output (Lumen)	2455 lm
IP	65

Dimensions Drawing

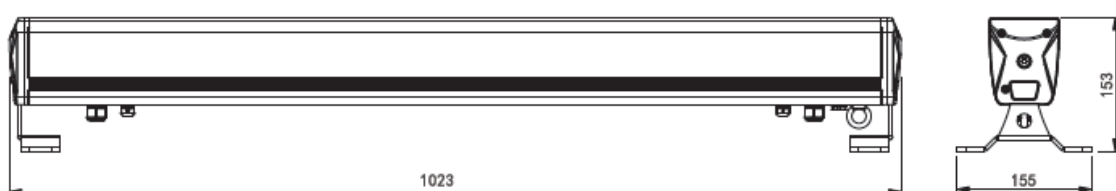

Photometric Data

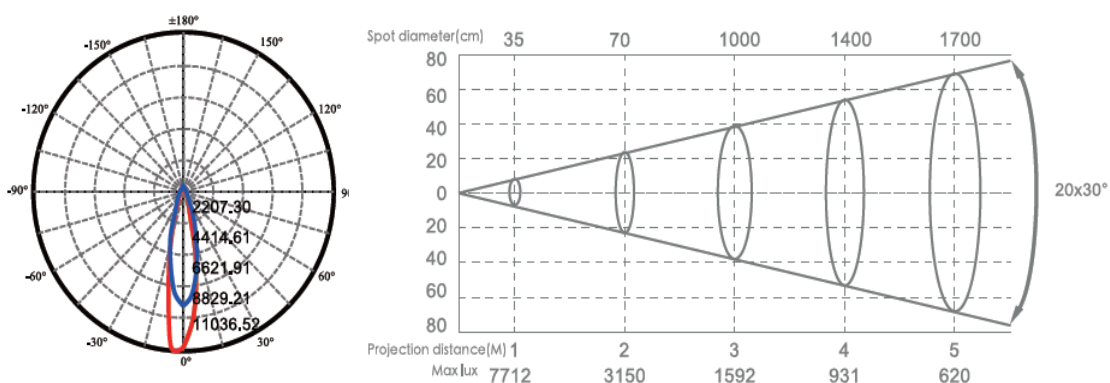

STEP LIGHT

나라장터 식별번호
25677654


ON-A142





SPECIFICATIONS

LED Power	3W
Dimensions	92 x 92 x 33mm
Beam Angle	8°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	150 lm
IP	65

Dimensions Drawing

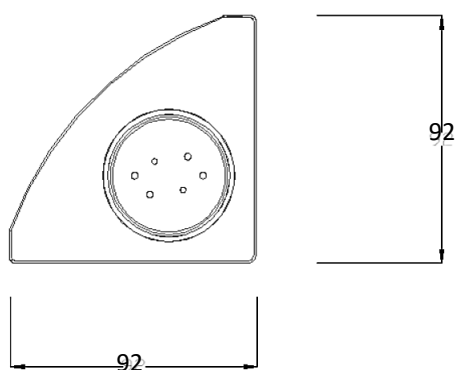

Photometric Data

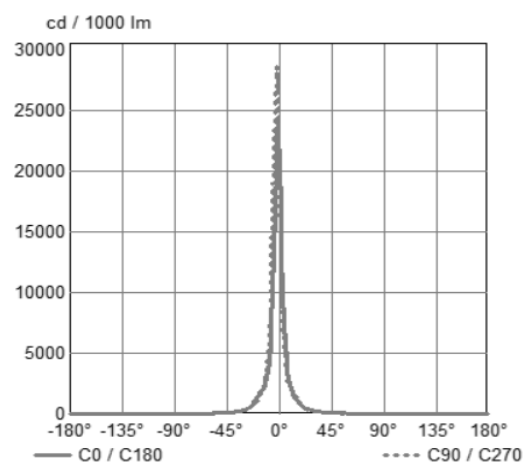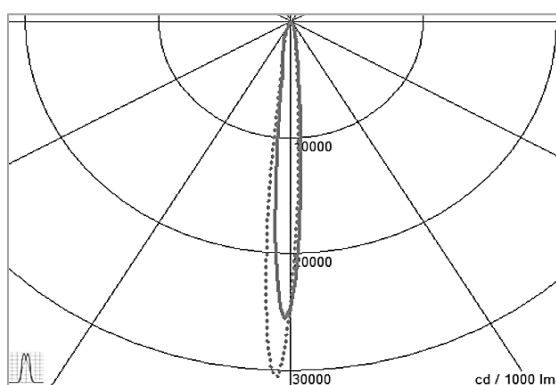

STEP LIGHT

나라장터 식별번호
25677652


ON-A140




SPECIFICATIONS

LED Power	2*2W
Dimensions	90 x 88 x 45mm
Beam Angle	5°
CT / Color mixing	3000K, 4000K, 6000K + COLOR
Output (Lumen)	180 lm
IP	65

Dimensions Drawing

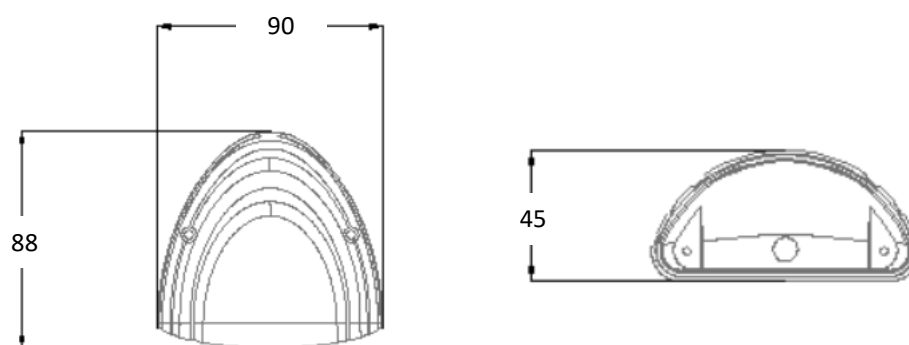

Photometric Data

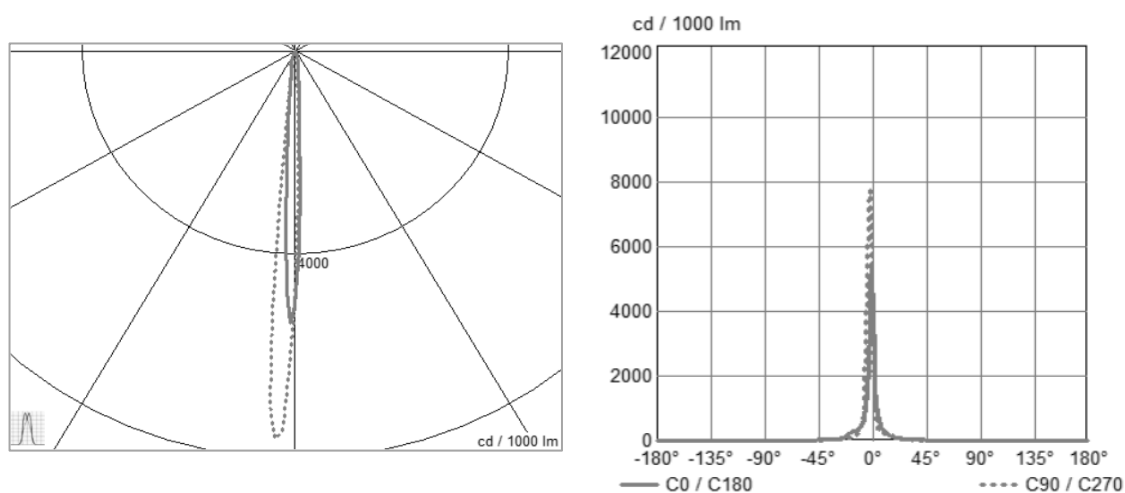

WALL LIGHT

나라장터 식별번호
24719715


ON-P014





SPECIFICATIONS

LED Power	3W
Dimensions	170 x 55 x 70.5mm
Beam Angle	30°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	110-130 lm
Weight	0.365 KG
IP	65

Dimensions Drawing

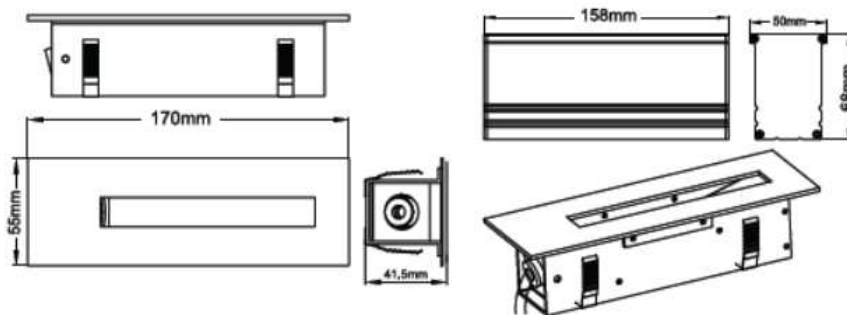

Photometric Data

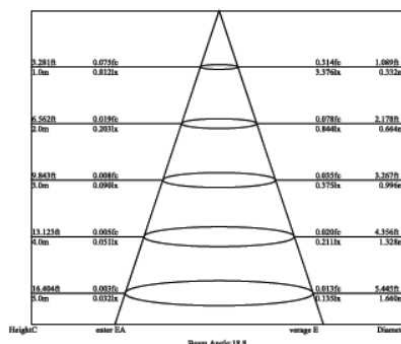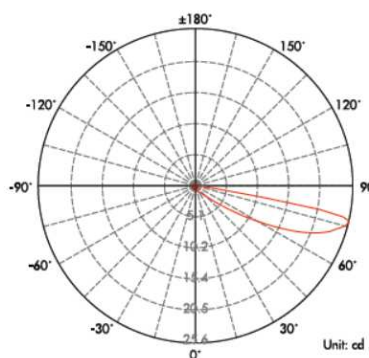

3000K, 30°

WALL LIGHT

나라장터 식별번호
24719723


ON-P022






SPECIFICATIONS

LED Power	3W
Dimensions	78 x 78 x 80mm
Beam Angle	Asymmetric 60° (optional : 15°, 20°, 25°, 30°, 38°, 45°, 60°)
CT / Color mixing	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
Output (Lumen)	80 lm
Weight	0.5 KG
IP	65

Dimensions Drawing

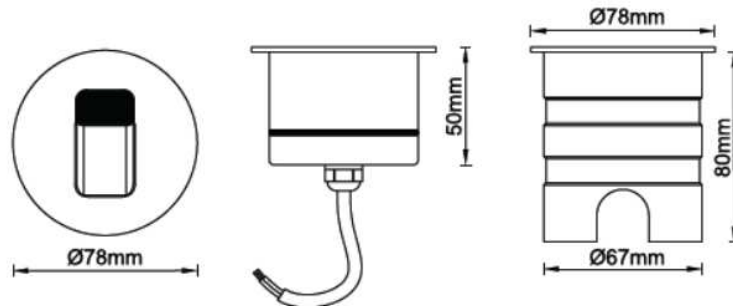

Photometric Data

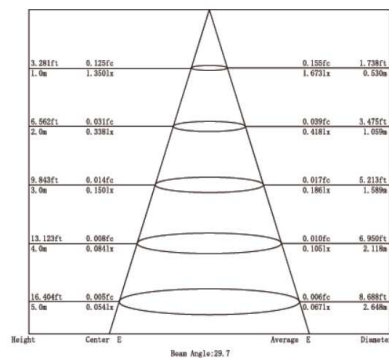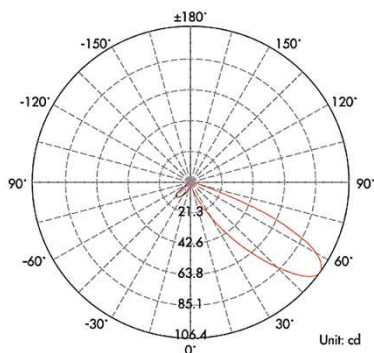

3000K, 60°X 30°

WALL LIGHT

나라장터 식별번호
24719725


ON-P024




SPECIFICATIONS

LED Power	3.5W
Dimensions	46 x 46 x 76mm
Beam Angle	Lens : 10° , 23° , 36° / Reflector: 15° , 23° , 38° , 45° , 60°
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500k
Output (Lumen)	750 lm
Weight	0.55 KG
IP	65


Dimensions Drawing

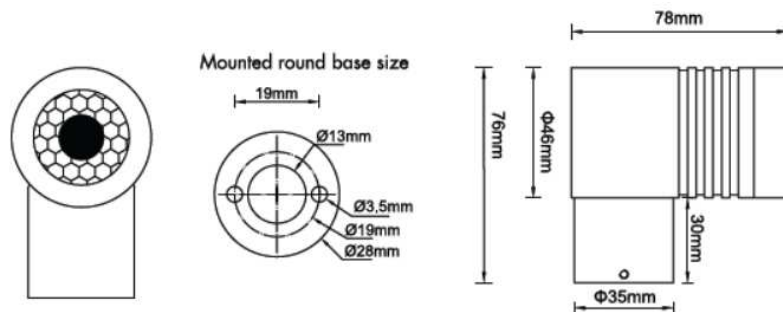

Photometric Data

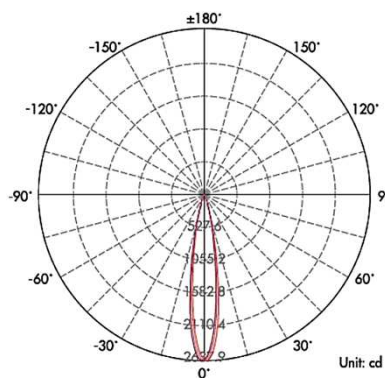

Center H	Beam Angle: 17.5	Average H	Diameter
3.281m	244.32lx	174.950lx	1.010m
1.0m	2629.9lx	1883.153lx	0.308m
6.562m	61.081lx	40.738lx	2.020m
2.0m	657.48lx	470.791lx	0.616m
9.843m	27.147lx	19.439lx	3.030m
3.0m	292.21lx	209.240lx	0.924m
15.125m	15.270lx	10.954lx	4.040m
4.0m	164.37lx	117.698lx	1.232m
16.404m	9.773lx	6.998lx	5.051m
5.0m	105.20lx	73.327lx	1.539m

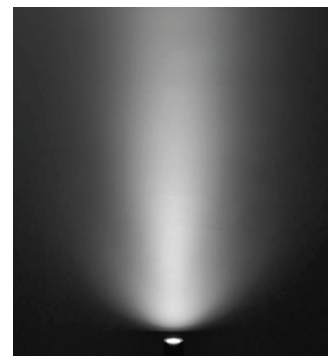


3000K, 15°

WALL LIGHT

나라장터 식별번호
24719724


ON-P023






SPECIFICATIONS

LED Power	4W
Dimensions	78 x 78 x 61mm
Beam Angle	360°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	140 lm
Weight	0.5 KG
IP	65

Dimensions Drawing

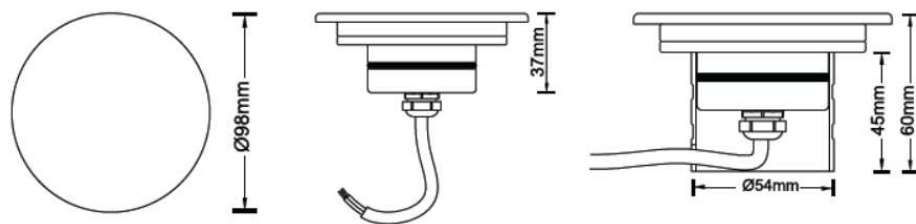

Photometric Data

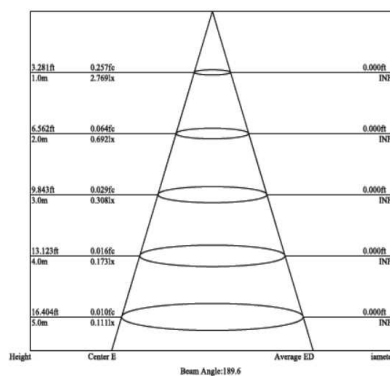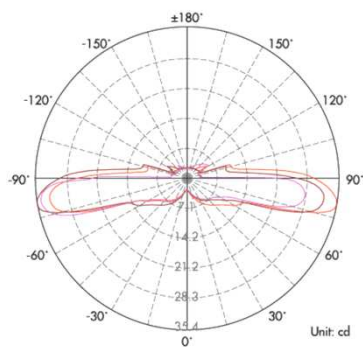

3000K, 360°

WALL LIGHT

나라장터 식별번호
25480500


ON-A086




SPECIFICATIONS

LED Power	5W
Dimensions	182 x 81 x 43mm
Beam Angle	Asymmetrical 120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	380-400 lm
Weight	0.45 KG
IP	65

Dimensions Drawing

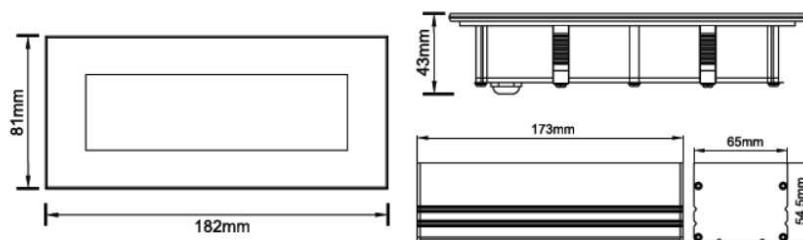

Photometric Data

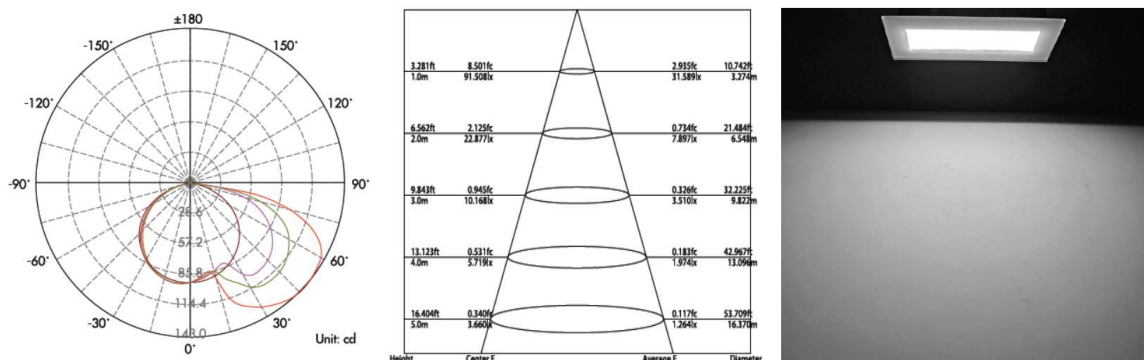


3000K, 120°

WALL LIGHT

나라장터 식별번호
24719713


ON-P012




SPECIFICATIONS

LED Power	5W
Dimensions	85 x 85 x 112mm
Beam Angle	300°* 5°
CT / Color mixing	RGB+WW / NW / CW
Output (Lumen)	110-130 lm
Weight	0.44 KG
IP	65

Dimensions Drawing

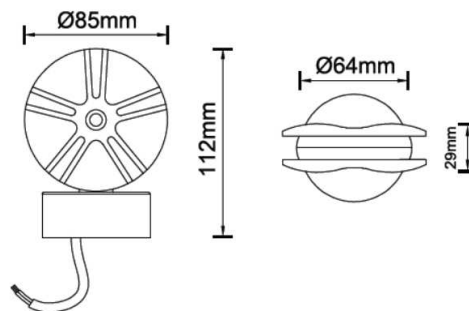

Photometric Data

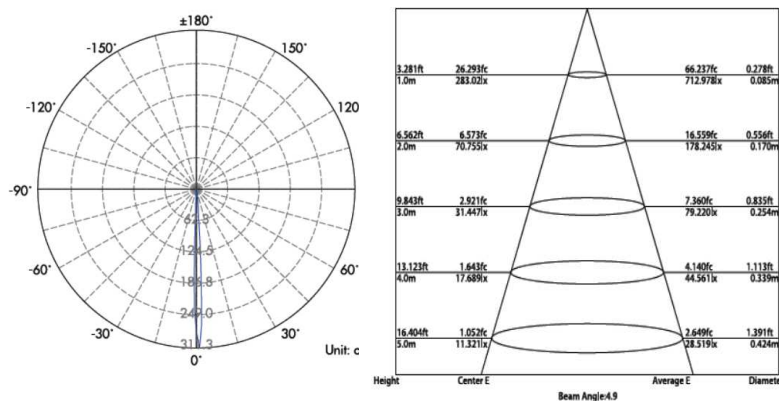

3000K, 300° * 5°

WALL LIGHT

나라장터 식별번호
24719726


ON-P025




SPECIFICATIONS

LED Power	3.5*2W
Dimensions	46 x 46 x 76mm
Beam Angle	Lens : 10° , 23° , 36° / Reflector: 15° , 23° , 38° , 45° , 60°
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500k
Output (Lumen)	750 lm
Weight	0.55 KG
IP	65

Dimensions Drawing

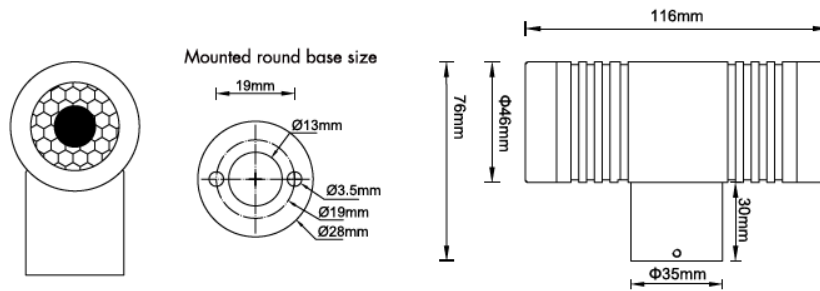

Photometric Data

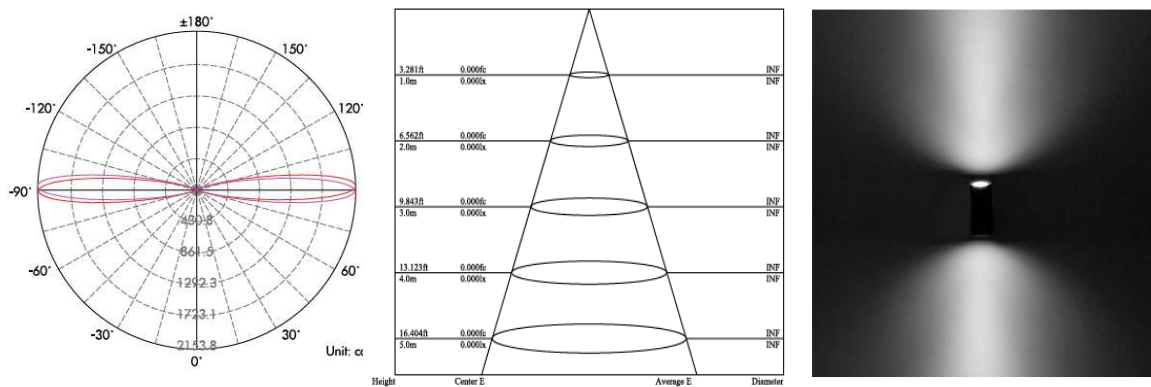

3000K, 2*15°

WALL LIGHT

나라장터 식별번호
24719714


ON-P013





SPECIFICATIONS

LED Power	7.5W
Dimensions	210 x 63 x 78mm
Beam Angle	Asymmetrical 30°x 120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	330-350 lm
IP	65

Dimensions Drawing

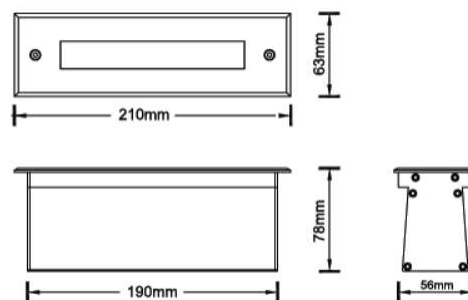

Photometric Data

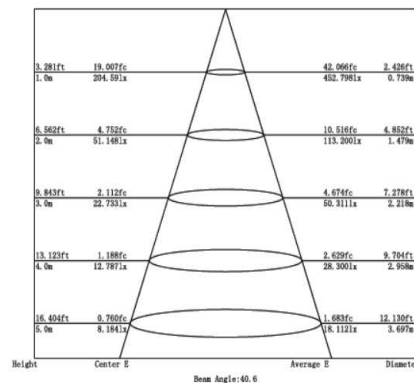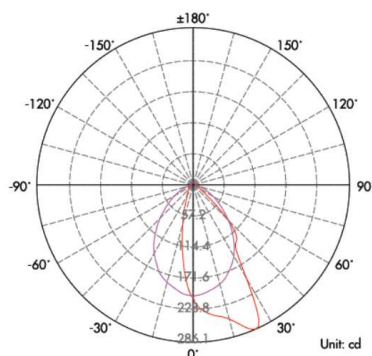

3000K, , 30x120°

WALL LIGHT

나라장터 식별번호
24719714


ON-A087




SPECIFICATIONS

LED Power	8W
Dimensions	155 x 90 x 80mm
Beam Angle	2 * 280°
CT / Color mixing	2700K, 3000K, 4000K, 4500K, 5700K, 6500k
Output (Lumen)	330 lm
Weight	0.45 KG
IP	65

Dimensions Drawing

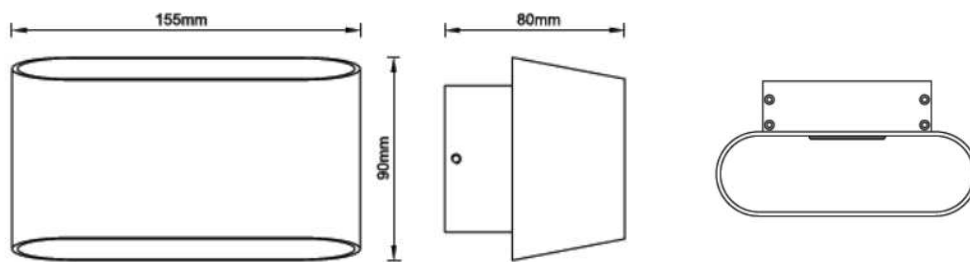

Photometric Data

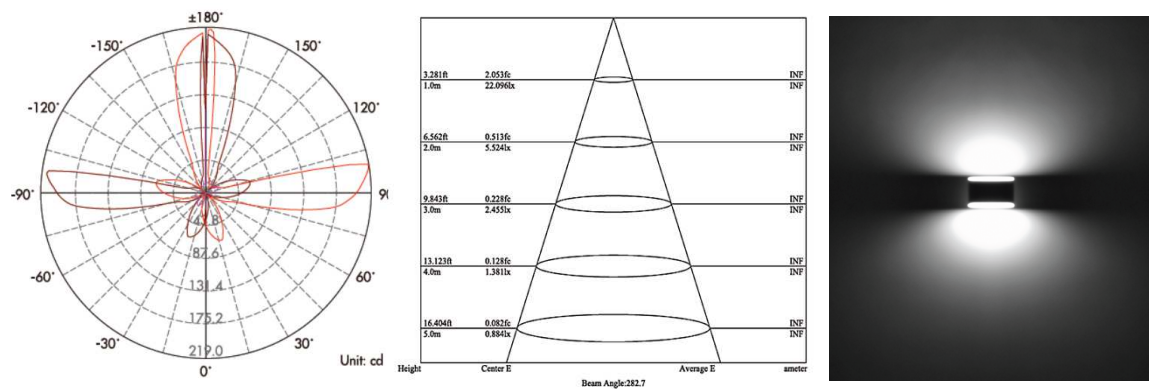

WALL LIGHT

나라장터 식별번호
25480502


ON-A088






SPECIFICATIONS

LED Power	9W
Dimensions	65 x 65 x 98mm
Beam Angle	Lens : 10° , 23° , 36° / Reflector: 15° , 23° , 38° , 45° , 60°
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500k
Output (Lumen)	750 lm
Weight	0.55 KG
IP	65

Dimensions Drawing

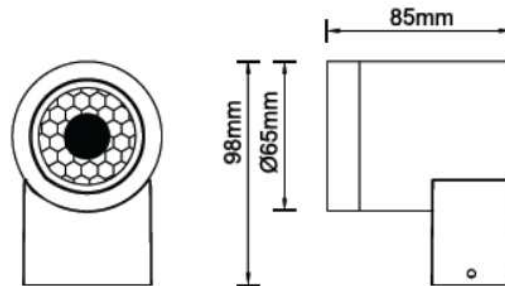

Photometric Data

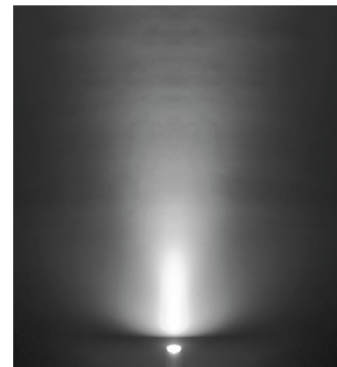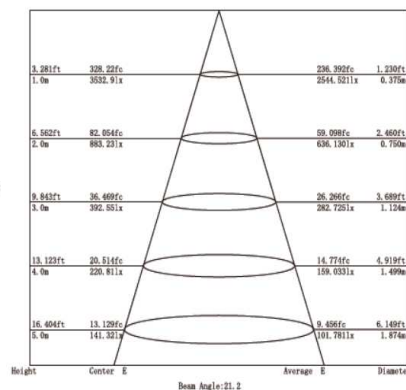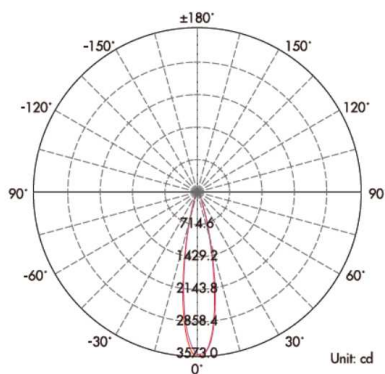

3000K, 23°

WALL LIGHT

나라장터 식별번호
25480504


ON-A090




SPECIFICATIONS

LED Power	12W (7.5+4.5W)
Dimensions	150 x 150 x 150mm
Beam Angle	90° for disc , 15° ,24° ,36° or 60° for the spot
CT / Color mixing	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
Output (Lumen)	700 + 300 lm
Weight	1 KG
IP	65

Dimensions Drawing

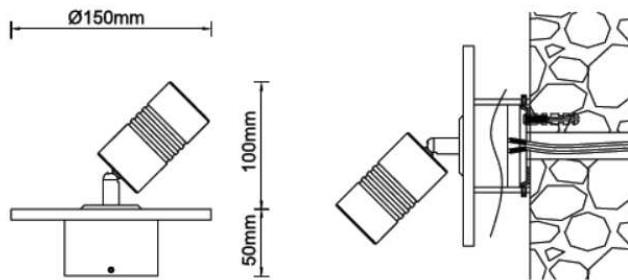

Photometric Data

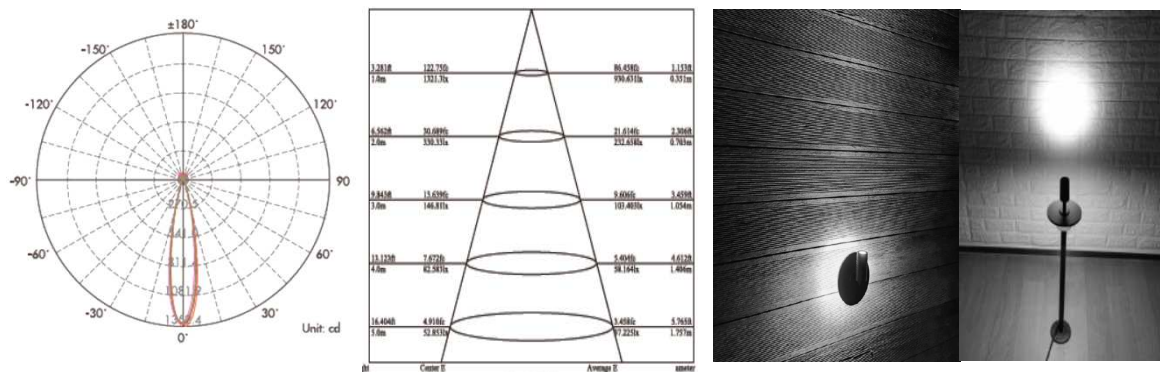

WALL LIGHT

나라장터 식별번호
25480503


ON-A089






SPECIFICATIONS

LED Power	9*2W
Dimensions	65 x 65 x 209mm
Beam Angle	2 * 280°
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500k
Output (Lumen)	1500 lm
Weight	0.87 KG
IP	65

Dimensions Drawing

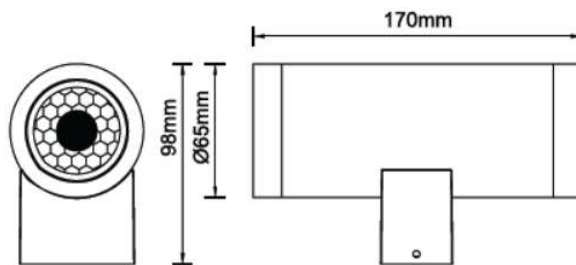

Photometric Data

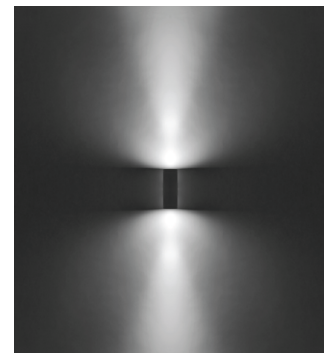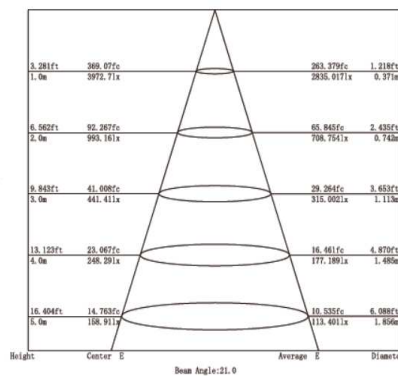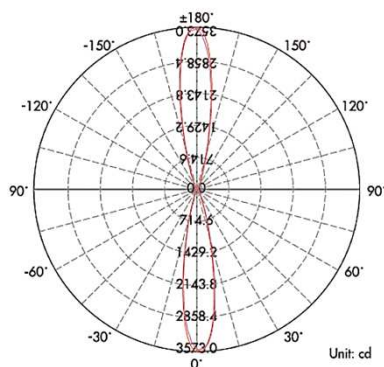

3000K, 2X23°

INGROUND LIGHT

나라장터 식별번호
25480514


ON-A100




SPECIFICATIONS

LED Power	0.5W
Dimensions	15 x 15 x 32mm
Beam Angle	100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	12 lm
Weight	0.05 KG
IP	67

Dimensions Drawing

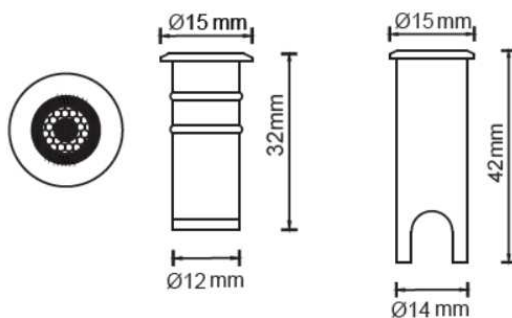

Photometric Data

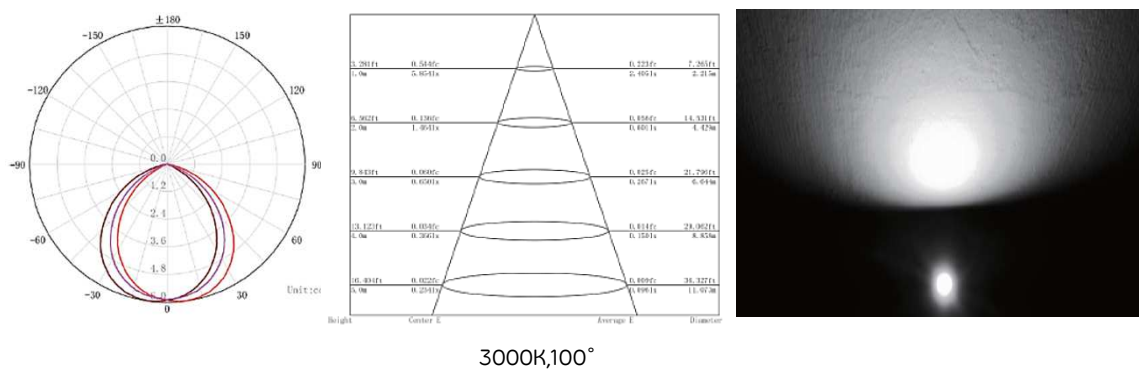

INGROUND LIGHT

나라장터 식별번호
25480494


ON-A080





SPECIFICATIONS

LED Power	1W
Dimensions	Ø40 x 12mm (Cut out: Ø38)
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K, R/G/Y/B
Output (Lumen)	95~100 lm
Weight	0.08 KG
IP	65

Dimensions Drawing

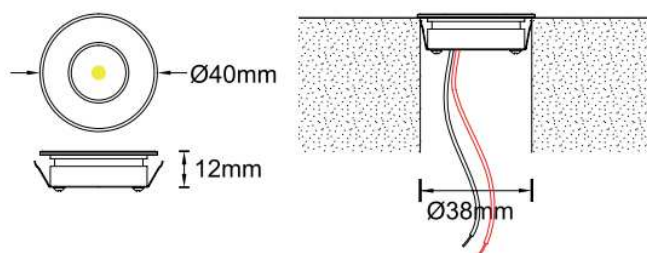

Photometric Data

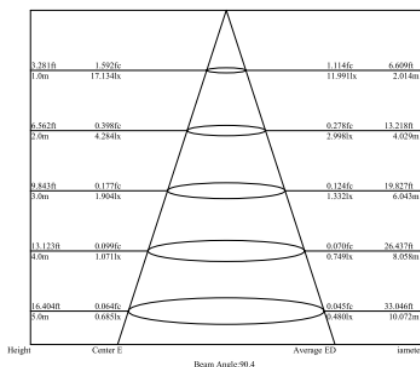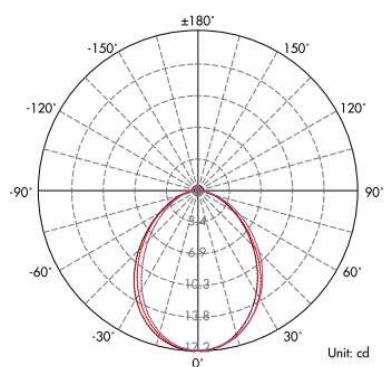

3000K, 120°

INGROUND LIGHT

나라장터 식별번호
25480513


ON-A099





SPECIFICATIONS

LED Power	1W
Dimensions	23 x 23 x 42mm
Beam Angle	12° / 15° / 20° / 25° / 30° / 38° / 45° / 60° / 100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	24 lm
Weight	0.07 KG
IP	66

Dimensions Drawing

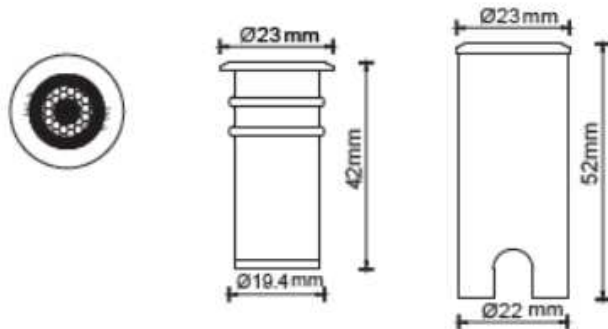

Photometric Data

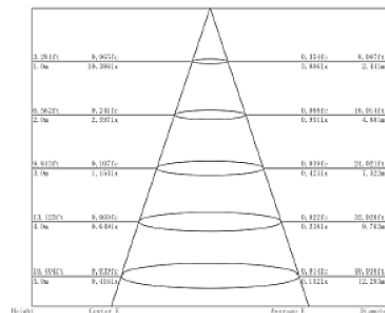

3000K,100°

INGROUND LIGHT

나라장터 식별번호
24719716


ON-P015




SPECIFICATIONS

LED Power	1.4W
Dimensions	Ø28 x 56mm
Beam Angle	15°, 25°, 30°, 45°, 60°, 120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K, R/G/Y/B
Output (Lumen)	75-80 lm
Weight	0.072 KG
IP	67

Dimensions Drawing

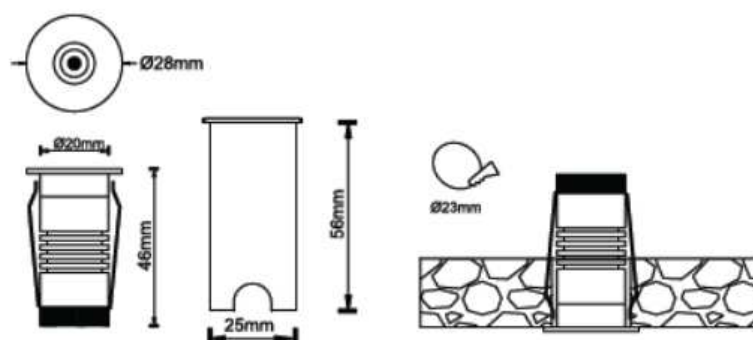


Photometric Data



Illuminance at a Distance

	Center Beam LUX	Beam Width	
		V	H
2m	15.29 LUX	1.6m	1.7m
4m	3.82 LUX	3.2m	3.5m
6m	1.70 LUX	4.8m	5.2m
8m	0.96 LUX	6.4m	7.0m
10m	0.61 LUX	8.1m	8.7m
12m	0.42 LUX	9.7m	10.5m

Vert.Spread:43.9 Horiz.Spread:47.2



3000K, 25°

나라장터 식별번호
24888518

LED Power	3W
Dimensions	60 x 60 x 75mm
Beam Angle	1x100°
CT / Color mixing	2700K, 3000K, 4000K, 6000K, R/G/Y/B
Output (Lumen)	95-100 lm
Weight	0.37 KG
IP	67

[illegible]

Figure 1: Beam Spread and Illuminance Data for the 1000 Series LED Downlight

The figure consists of three parts:

- Beam Spread Diagram:** A circular diagram showing the beam spread in degrees. The center is labeled $\pm 180^\circ$. The outer ring shows angles from -180° to 180° in 30° increments. The inner ring shows angles from -150° to 150° in 30° increments. The diagram shows a central beam spread of 38.3° and a wider spread of 135.0° at the bottom.
- Illuminance Table:** A table showing the illuminance (Center Beam LUX) at various distances (2m to 12m) and the corresponding beam width (V and H).
- Photograph:** A photograph of the 1000 Series LED Downlight fixture, showing its circular design and the light beam it emits.


Distance (m)	Center Beam LUX	Beam Width V (m)	Beam Width H (m)
2m	0.30 LUX	9.6m	1.4m
4m	0.07 LUX	19.3m	2.8m
6m	0.03 LUX	28.9m	4.2m
8m	0.02 LUX	38.6m	5.6m
10m	0.01 LUX	48.2m	6.9m
12m	0.01 LUX	57.8m	8.3m

Vert. Spread: 135.0H
Horiz. Spread: 38.3

INGROUND LIGHT

나라장터 식별번호
24719692


ON-I002




SPECIFICATIONS

LED Power	3W
Dimensions	65 x 65 x 17mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K, RGB, RGBW
Output (Lumen)	240 lm
Weight	0.032 KG
IP	65

Dimensions Drawing

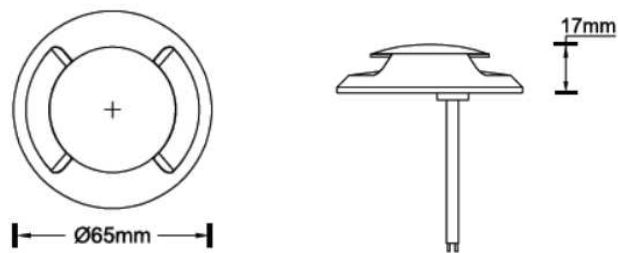

Photometric Data

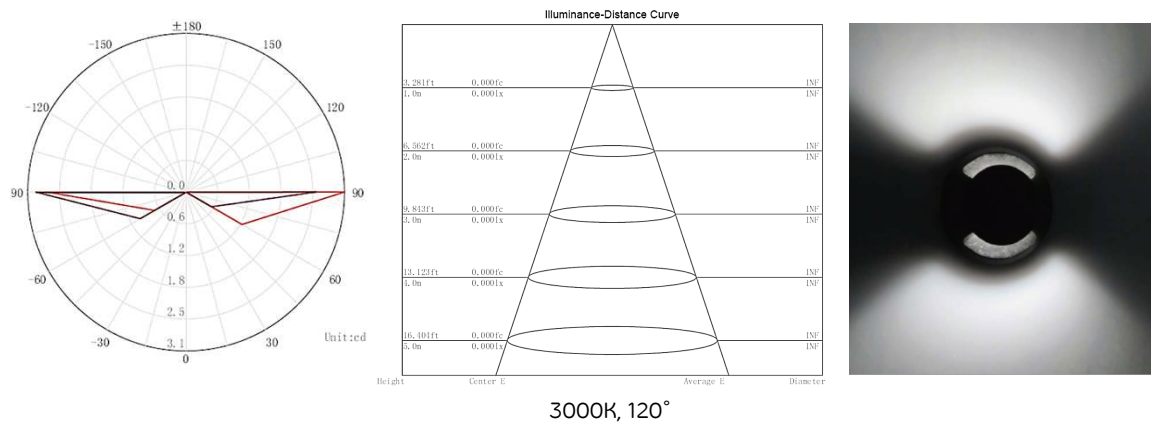

INGROUND LIGHT

나라장터 식별번호
25485920


ON-A079





SPECIFICATIONS

LED Power	7W
Dimensions	200 x 80 x 83mm (Cut out: 175 x 75 x 80)
Beam Angle	Asymmetrical 15°x (6°/11°/15°/17°/23°/28°/43°/58°/95°options)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	400 lm
IP	67

Dimensions Drawing

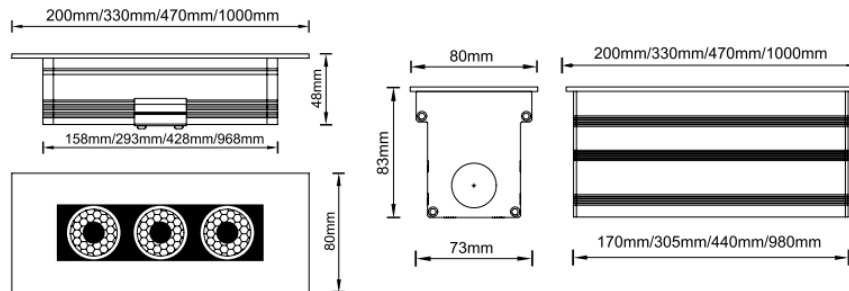

Photometric Data

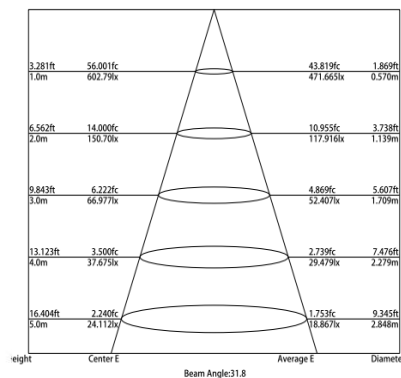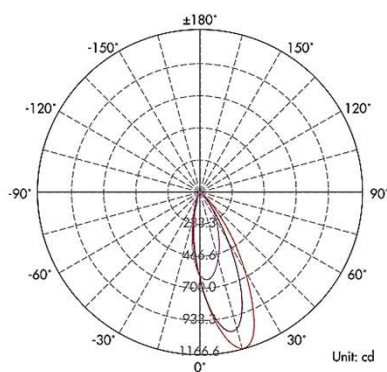

3000K, 7W, 15x28°

INGROUND LIGHT

나라장터 식별번호
25480515


ON-A101





SPECIFICATIONS

LED Power	7.5W
Dimensions	80 x 80 x 63mm
Beam Angle	20x45° (Asymmetrical beam)
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500K
Output (Lumen)	430-600 lm
Weight	0.6 KG
IP	66

Dimensions Drawing

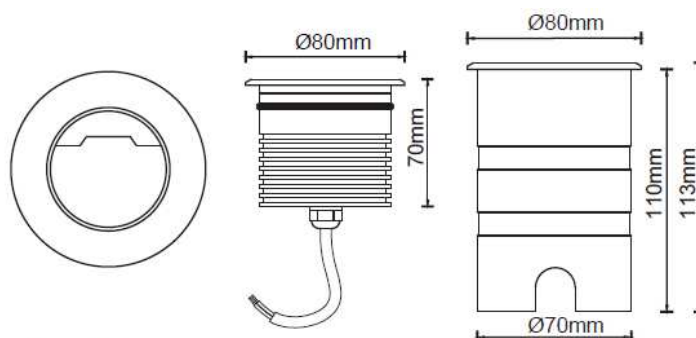

Photometric Data

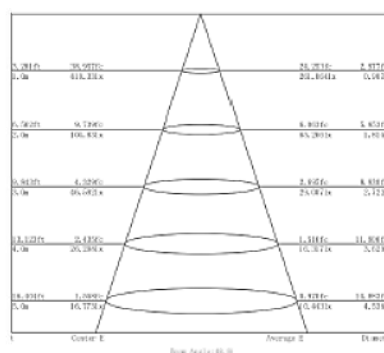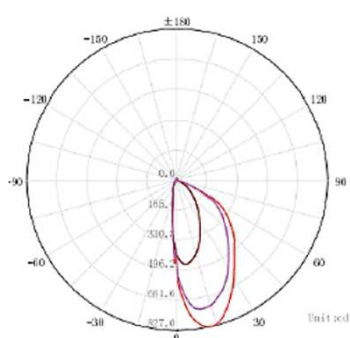

3000K, 20 X 45 °

INGROUND LIGHT

나라장터 식별번호
24719695


ON-I005




SPECIFICATIONS

LED Power	9W
Dimensions	116 x 116 x 100mm
Beam Angle	One beam with 2° + 2° + 2°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	280 - 300 lm
Weight	1.24 KG
IP	67

Dimensions Drawing

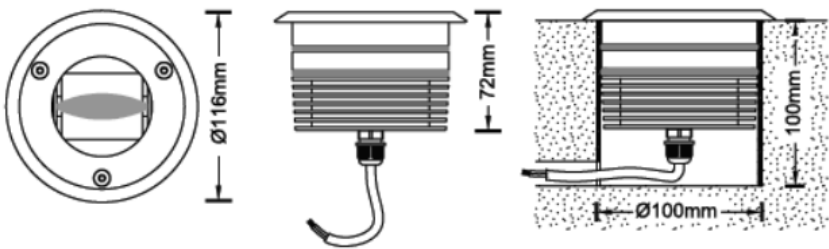

Photometric Data

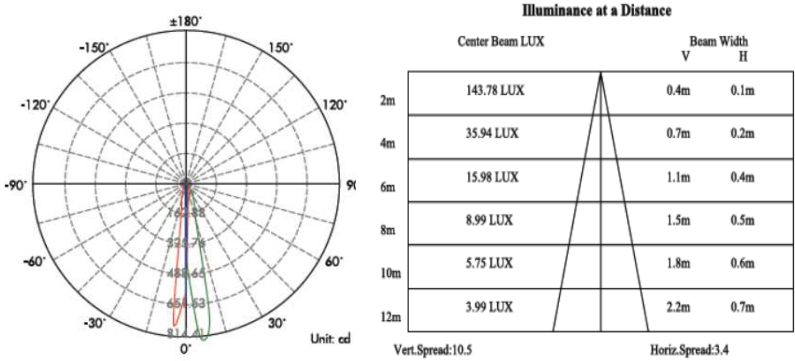

3000K, 2° + 2° + 2°

INGROUND LIGHT

나라장터 식별번호
24719701


ON-I011




SPECIFICATIONS

LED Power	9W
Dimensions	Ø130 x 38mm
Beam Angle	Symmetrical : 5°, 10°, 17°, 23°, 28°, 43°, 58° Asymmetrical : 15°x25°, 15°x30°, 15°x45°, 15°x60° (tilt + pan)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	480-540 lm
Weight	0.72 KG
IP	67

Dimensions Drawing

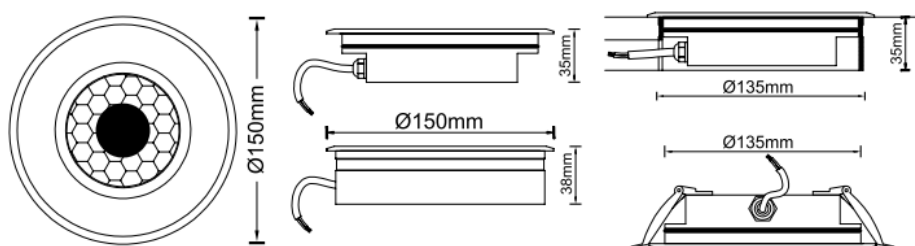

Photometric Data

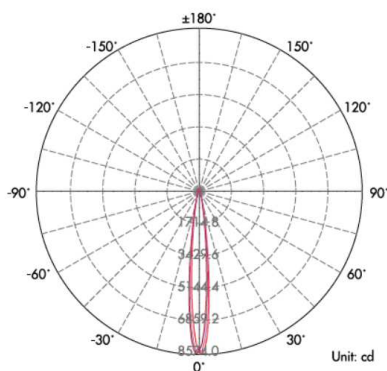

3.281ft	779.02fc	564.662fc	0.687ft
1.0m	8385.4lx	6078.021lx	0.209m
6.562ft	194.75fc	141.165fc	1.374ft
2.0m	2096.3lx	1519.505lx	0.419m
9.843ft	86.558fc	62.740fc	2.061ft
3.0m	931.71lx	675.336lx	0.628m
13.123ft	48.689fc	35.291fc	2.748ft
4.0m	524.09lx	379.876lx	0.837m
16.404ft	31.161fc	22.586fc	3.434ft
5.0m	335.41lx	243.121lx	1.047m

Height Center E Beam Angle: 120 Average E Diameter

3000K, 17°



INGROUND LIGHT

나라장터 식별번호
24719722


ON-P021




SPECIFICATIONS

LED Power	10W
Dimensions	95 x 95 x 77mm
Beam Angle	120°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	2400~2500 lm
Weight	3.535 KG
IP	67

Dimensions Drawing

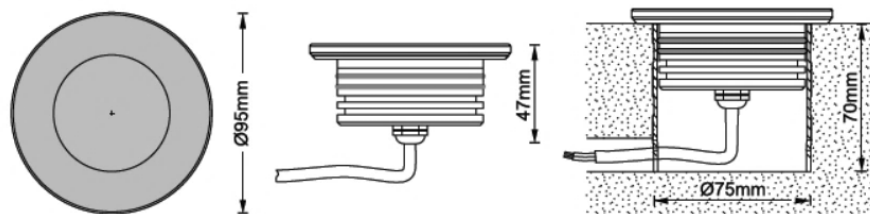

Photometric Data

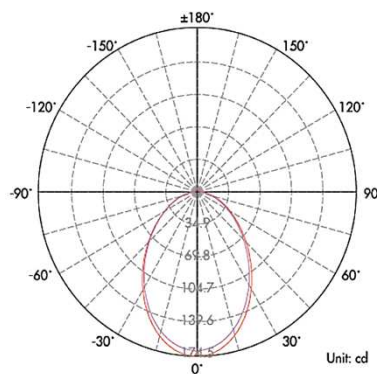

Height: C	center E-A	Beam Angle: 81.7	average E	Diameter
1.281m	15.833lx	13.287lx	5.670lx	1.728m
2.562m	3.958lx	3.322lx	11.340lx	3.456m
3.843m	1.759lx	1.476lx	17.010lx	5.184m
5.124m	0.990lx	0.830lx	22.680lx	6.912m
6.405m	0.633lx	0.551lx	28.350lx	8.640m



3000K, 1+120°

INGROUND LIGHT

나라장터 식별번호
25480465


ON-A075




SPECIFICATIONS

LED Power	12W
Dimensions	Ø150 x 35mm (Cut out: Ø120)
Beam Angle	10°, 20°, 30°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	830~950 lm
Weight	0.98 KG
IP	67

Dimensions Drawing

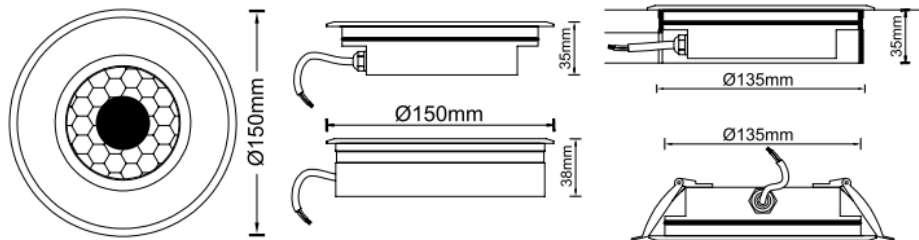

Photometric Data

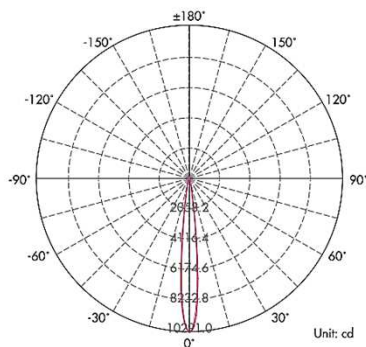

3.281ft	956.06fc	700.367fc	0.662ft
1.0m	10291lx	7538.750lx	0.202m
6.562ft	239.01fc	175.092fc	1.323ft
2.0m	2572.8lx	1884.687lx	0.403m
9.843ft	106.23fc	77.819fc	1.985ft
3.0m	1143.4lx	837.639lx	0.605m
13.123ft	59.754fc	43.773fc	2.646ft
4.0m	643.19lx	471.172lx	0.807m
16.404ft	38.242fc	28.015fc	3.308ft
5.0m	411.64lx	301.550lx	1.008m

Height Center E Beam Angle: 11.5 Average E Diameter

3000K, 30°



INGROUND LIGHT

나라장터 식별번호
25480457


ON-A074




SPECIFICATIONS

LED Power	12W
Dimensions	Ø134 x 76mm (Cut out: Ø135)
Beam Angle	24°, 38°, 60° (beam direction adjustable by hand at 20° at max)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	950~1000 lm
Weight	1.9 KG
IP	67

Dimensions Drawing

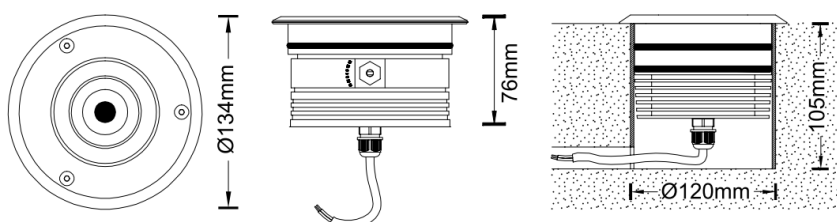

Photometric Data

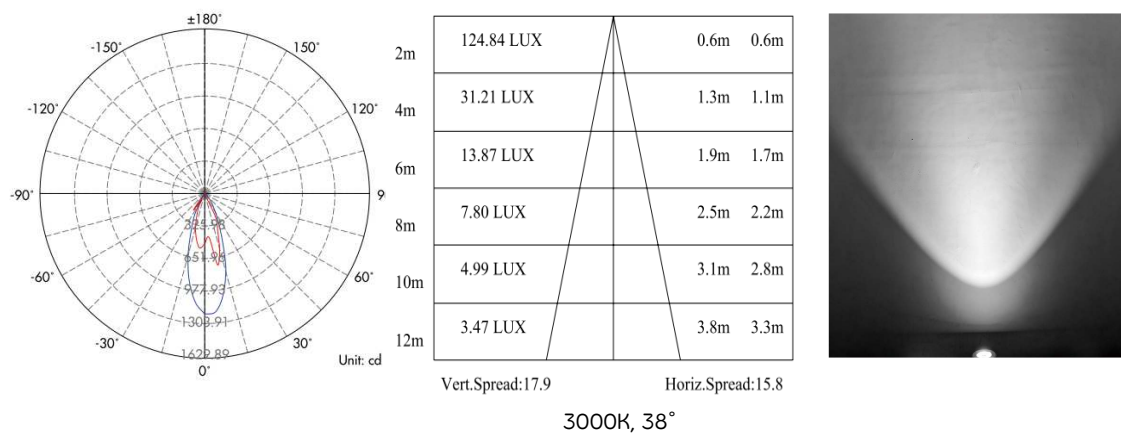

INGROUND LIGHT

나라장터 식별번호
25485919


ON-A078






SPECIFICATIONS

LED Power	14W
Dimensions	330 x 80 x 83mm (Cut out: 310 x 75 x 80)
Beam Angle	Asymmetrical 15°x (6°/11°/15°/17°/23°/28°/43°/58°/95°options)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	800 lm
IP	67

Dimensions Drawing

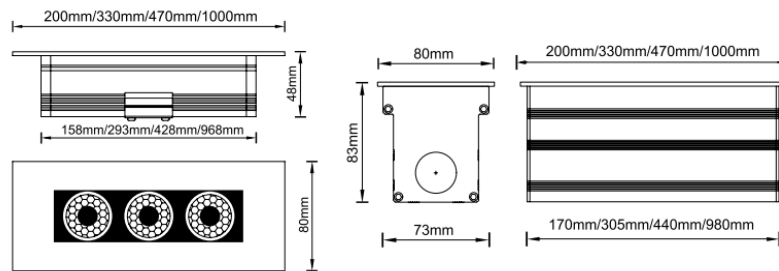

Photometric Data

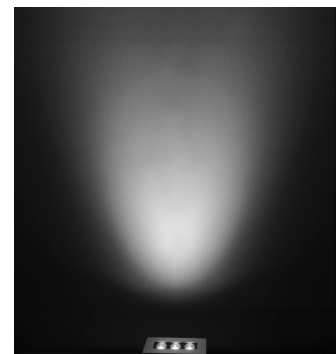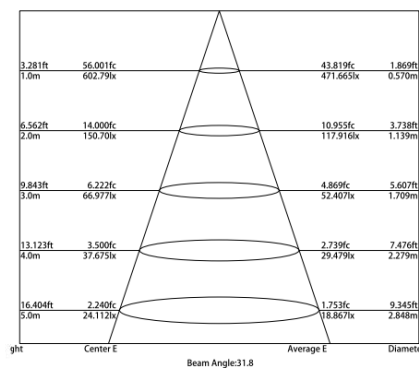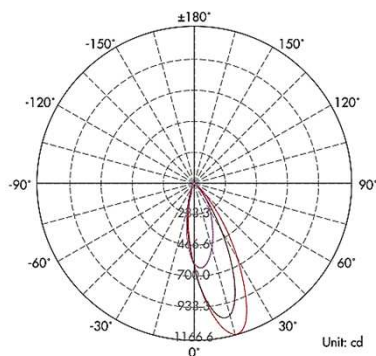

3000K, 7W, 15x28°

INGROUND LIGHT

나라장터 식별번호
24719696


ON-I006




SPECIFICATIONS

LED Power	15W
Dimensions	Ø100 x 115mm
Beam Angle	Asymmetrical : 15°X70°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	540-640 lm
Weight	0.95 KG
IP	67

Dimensions Drawing

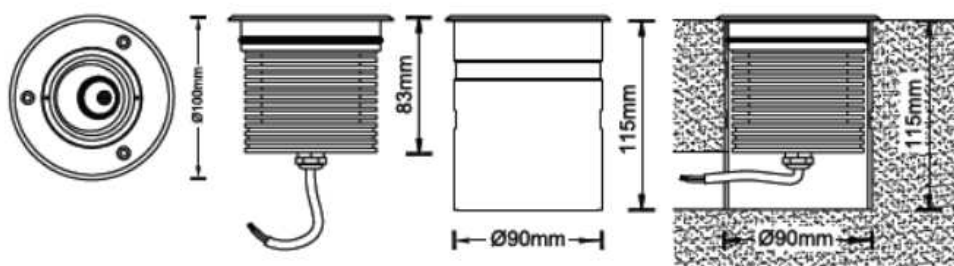


Photometric Data

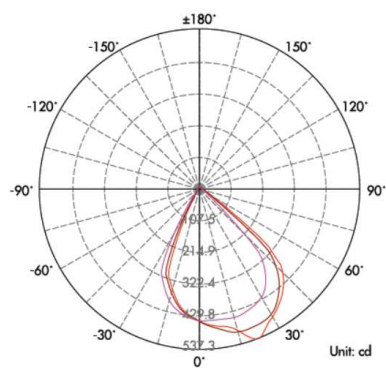

3.281ft	41.116fc	22.398fc	4.631ft
1.0m	442.57lx	241.093lx	1.411m
6.562ft	10.279fc	5.600fc	9.261ft
2.0m	110.64lx	60.273lx	2.823m
9.843ft	4.568fc	2.489fc	13.892ft
3.0m	49.175lx	404.483lx	1.134m
13.123ft	2.570fc	1.400fc	18.522ft
4.0m	27.661lx	15.068lx	5.646m
16.404ft	1.645fc	0.896fc	23.153ft
5.0m	17.703lx	9.644lx	7.057m

Unit: cd Height Center E Beam Angle: 70.4 Average E Diameter



3000K, 15 X 70°

INGROUND LIGHT

나라장터 식별번호
24719691


ON-I001




SPECIFICATIONS

LED Power	15W
Dimensions	Ø130 x 38mm
Beam Angle	Symmetrical : 5°, 10°, 17°, 23°, 28°, 43°, 58° Asymmetrical : 15°x25°, 15°x30°, 15°x45°, 15°x60° (tilt + pan)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	480-540 lm
Weight	0.72 KG
IP	67

Dimensions Drawing

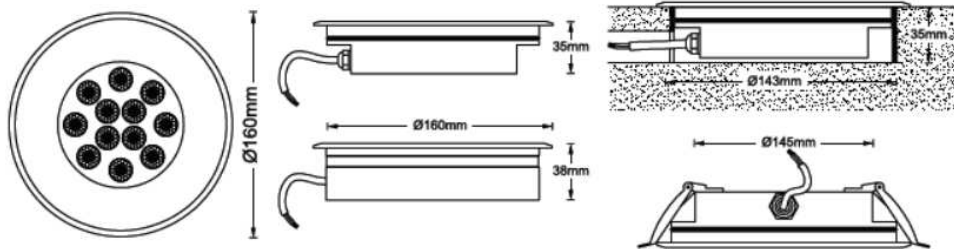


Photometric Data

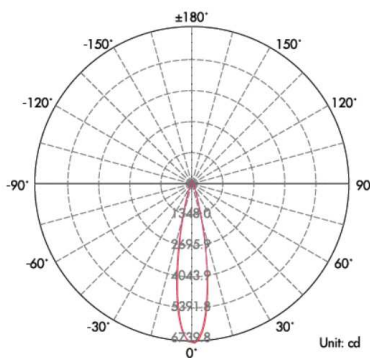

3.281ft	623.53fc	450.231fc	1.181ft
1.0m	6711.6lx	4846.289lx	0.360m
6.562ft	155.88fc	112.558fc	2.362ft
2.0m	1677.9lx	1211.572lx	0.720m
9.843ft	69.281fc	50.026fc	3.542ft
3.0m	745.74lx	538.477lx	1.080m
13.123ft	38.970fc	28.139fc	4.723ft
4.0m	419.48lx	302.893lx	1.440m
16.404ft	24.941fc	18.009fc	5.904ft
5.0m	268.47lx	193.852lx	1.800m

Height Center E Beam Angle: 2 0.4 Average E Diameter

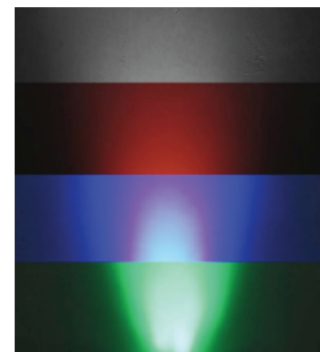

3000K, 17°

INGROUND LIGHT

나라장터 식별번호
25480516


ON-A102





SPECIFICATIONS

LED Power	15W
Dimensions	100 x 100 x 82mm
Beam Angle	20x45° (Asymmetrical beam)
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500K
Output (Lumen)	430-600 lm
Weight	0.6 KG
IP	66

Dimensions Drawing

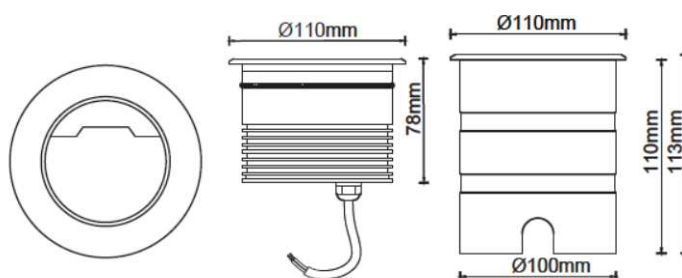

Photometric Data

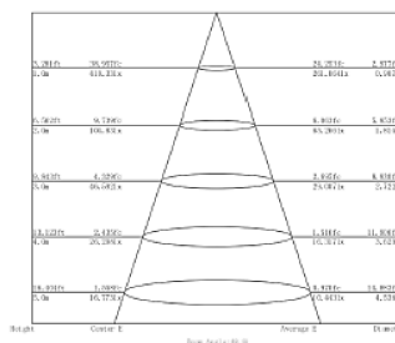

3000K, 20 X 50 °

INGROUND LIGHT

나라장터 식별번호
24719694



ON-I004





SPECIFICATIONS

LED Power	18W
Dimensions	200 x 200 x 140mm
Beam Angle	8°, 10°, 17°, 23°, 28°, 43°, 58°, 95°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	2400~2500 lm
Weight	3.535 KG
IP	67

Dimensions Drawing

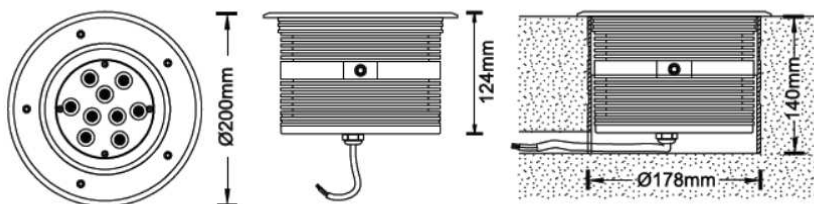

Photometric Data

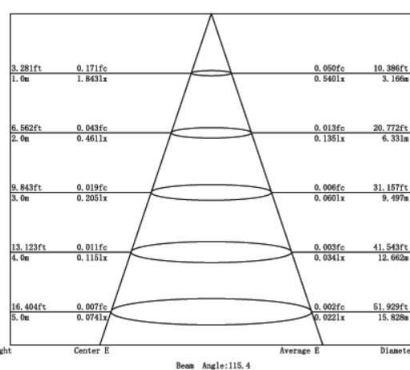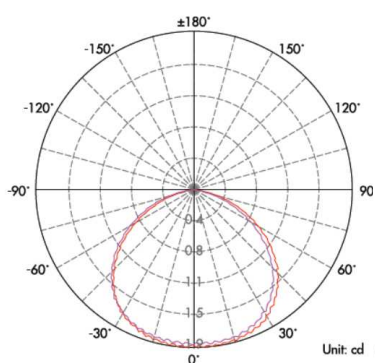

3000K, 40°

INGROUND LIGHT

나라장터 식별번호
25485918


ON-A077




SPECIFICATIONS

LED Power	21W
Dimensions	470 x 80 x 83mm (Cut out: 445 x 75 x 80)
Beam Angle	Asymmetrical 15°x (6°/11°/15°/17°/23°/28°/43°/58°/95°options)
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	1200 lm
IP	67

Dimensions Drawing

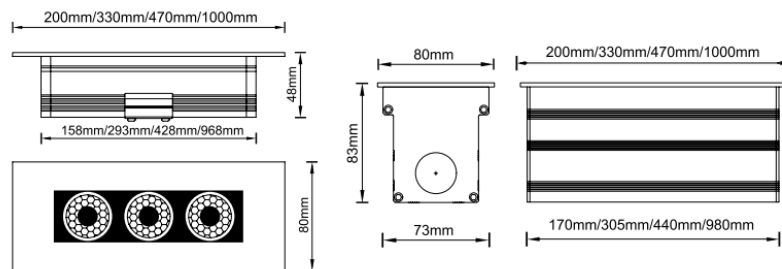

Photometric Data

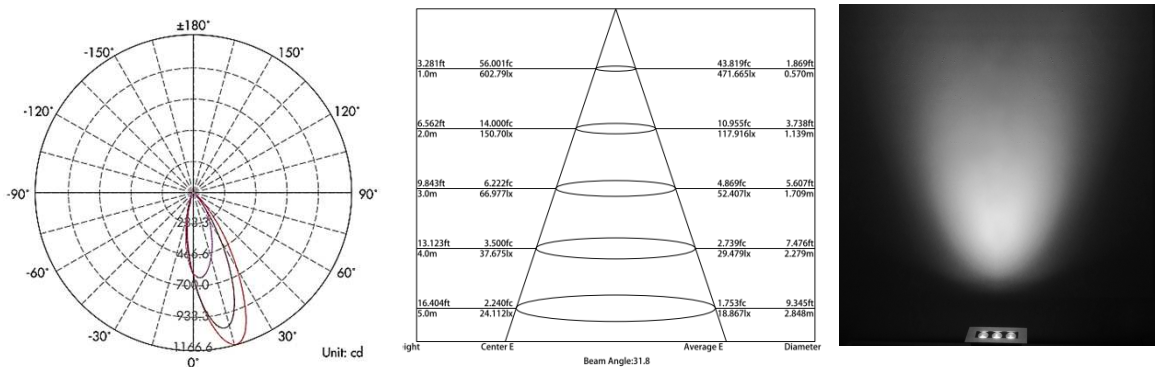

INGROUND LIGHT

나라장터 식별번호
24719699


ON-I009




SPECIFICATIONS

LED Power	25W
Dimensions	135 x 135 x 140mm
Beam Angle	15° tilt asymmetric + 60° pan beam
CT / Color mixing	2700K, 3000K, 4000K, 6000K, R/G/Y/B
Output (Lumen)	2400~2500 lm
Weight	3.535 KG
IP	67


Dimensions Drawing

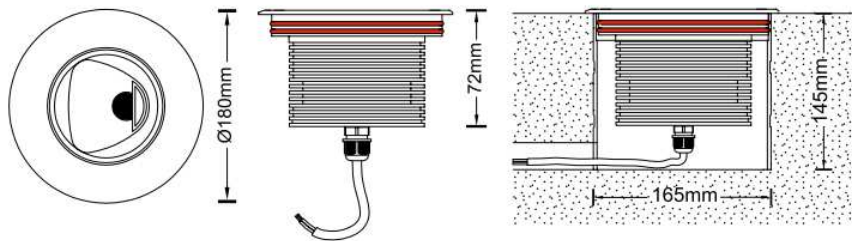

Photometric Data

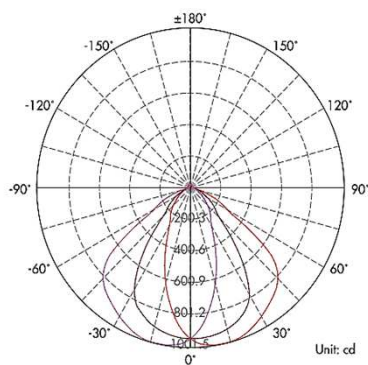

Height	Center E	Average ED	Beam Angle	Unit
1.0m	87.7796	84.4116	4.9700	1.315m
2.0m	21.9456	21.1036	9.9400	3.030m
3.0m	9.7536	9.3796	14.9100	4.544m
4.0m	5.4866	5.2766	19.8800	6.059m
5.0m	3.5116	3.3766	24.8490	7.574m



3000K, 15°+60°

INGROUND LIGHT

나라장터 식별번호
25480466


ON-A076




SPECIFICATIONS

LED Power	30W
Dimensions	Ø180 x 72mm (Cut out: Ø165)
Beam Angle	15° tilt asymmetric + 60° pan beam
CT / Color mixing	2700K, 3000K, 4000K, 6000K, R/G/Y/B
Output (Lumen)	2400~2500 lm
Weight	3.535 KG
IP	67


Dimensions Drawing

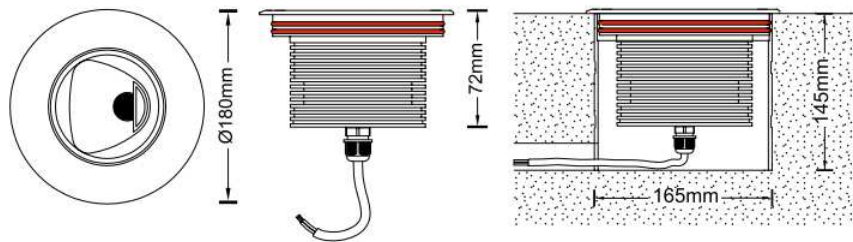

Photometric Data

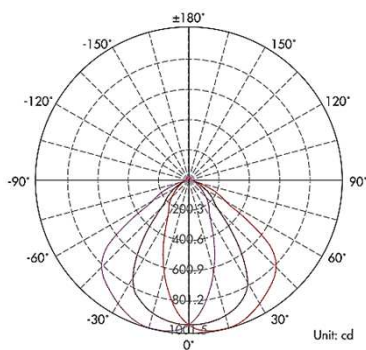

3.281ft 1.0m	87.779fc 944.83lx	84.411fc 908.600lx	4.970ft 1.515m
6.562ft 2.0m	21.945fc 236.21lx	21.103fc 227.150lx	9.940ft 3.030m
9.843ft 3.0m	9.753fc 104.98lx	9.379fc 100.950lx	14.910ft 4.544m
13.123ft 4.0m	5.486fc 59.051lx	5.376fc 56.783lx	19.880ft 6.059m
16.404ft 5.0m	3.511fc 37.794lx	3.376fc 36.344lx	24.849ft 7.574m



3000K, 15°+60°

INGROUND LIGHT

나라장터 식별번호
24719700


ON-I010




SPECIFICATIONS

LED Power	36W
Dimensions	Ø170 x 170mm
Beam Angle	15°, 24°, 38°, 60°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	2880~3060 lm
Weight	3.49 KG
IP	66

Dimensions Drawing

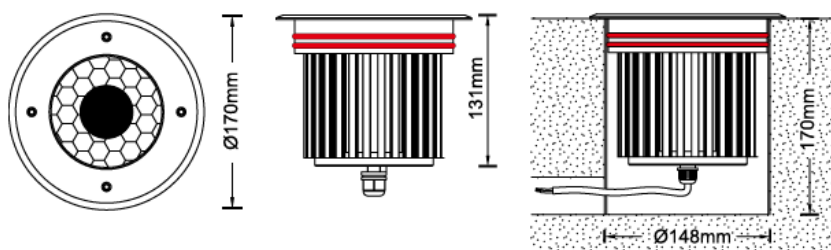

Photometric Data

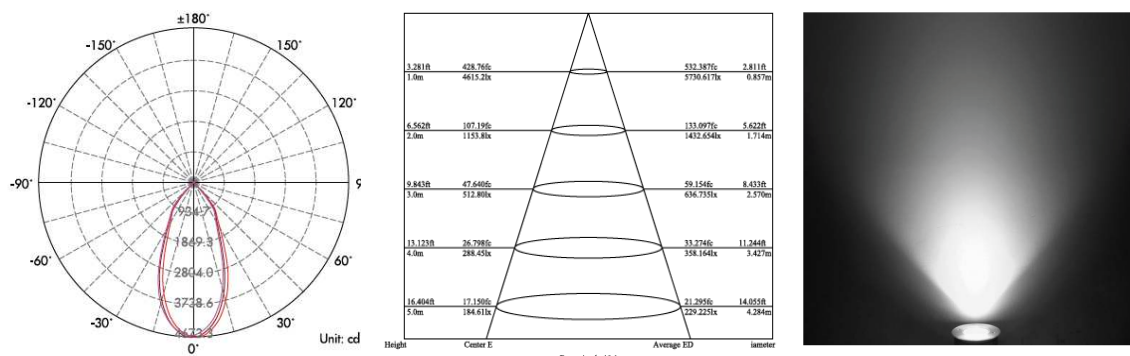

3000K, 1°+38°

FLOOD LIGHT

나라장터 식별번호
25480496


ON-A082




SPECIFICATIONS

LED Power	5W
Dimensions	42 x 46 x 77mm
Beam Angle	Lens : 15° , 24° , 36° , 60° / Reflector: 15° , 25° , (38° optional)
CT / Color mixing	2700K , 3000K , 4000K, 6000K
Weight	0.29 KG
IP	66

Dimensions Drawing

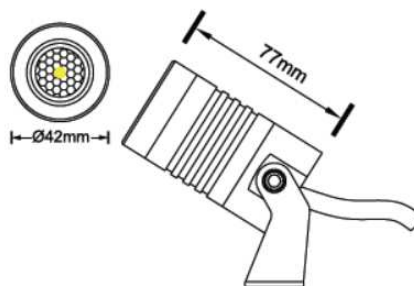

Photometric Data

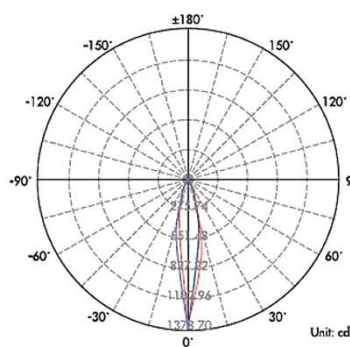

ILLUMINANCE at a Distance

	Center Beam LUX	Beam Width V	Beam Width H
2m	334.45 LUX	0.6m	0.6m
4m	83.61 LUX	1.3m	1.2m
6m	37.16 LUX	1.9m	1.8m
8m	20.90 LUX	2.5m	2.4m
10m	13.38 LUX	3.2m	3.0m
12m	9.29 LUX	3.8m	3.6m

Vert.Spread:17.9 Horiz.Spread:17.3



3000K, 25°

FLOOD LIGHT

나라장터 식별번호
24719763


ON-F012




SPECIFICATIONS

LED Power	6W
Dimensions	70 x 100 x 80 mm
Beam Angle	15° , 30° , 45°
CT / Color mixing	3000K, 4000K, 5700K, RGBW
Output (Lumen)	350 lm
IP	65

Dimensions Drawing

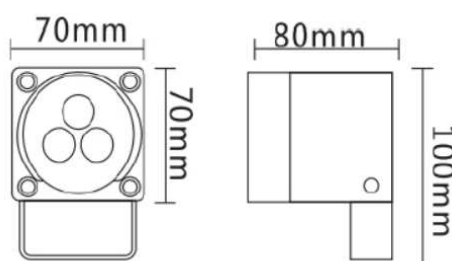

Photometric Data

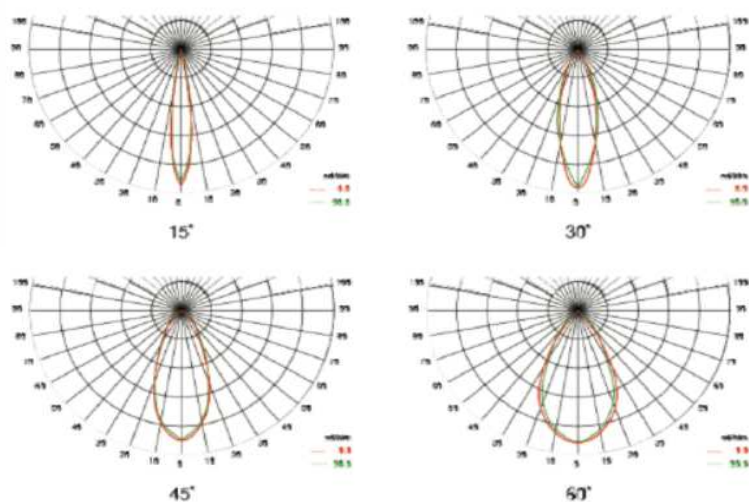

FLOOD LIGHT

나라장터 식별번호
24888527


ON-P041





SPECIFICATIONS

LED Power	12W
Dimensions	217 x 84.5 x 76mm
Beam Angle	20°, 30°, 40°
CT / Color mixing	1800-6000K or RGBW
Weight	1.0 KG
Output (Lumen)	440- 728 lm
IP	65

Dimensions Drawing

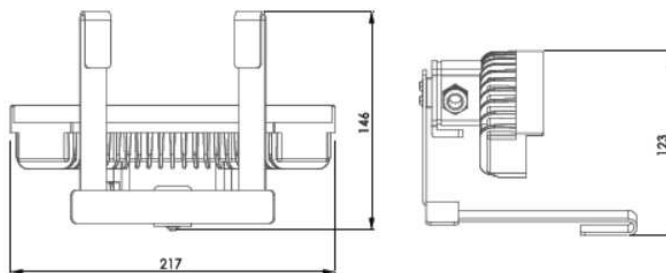

Photometric Data

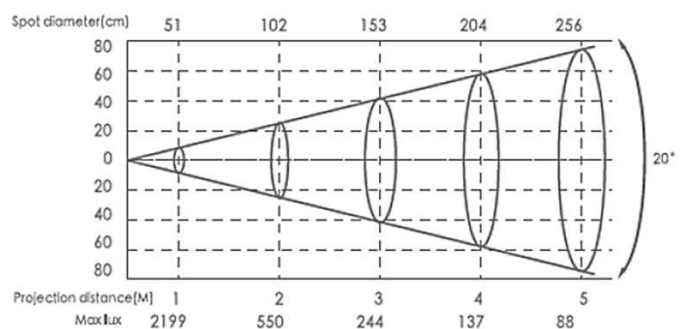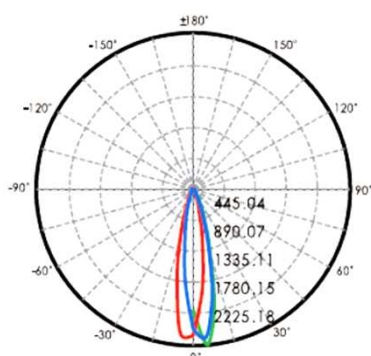

3000K, 20°

FLOOD LIGHT

나라장터 식별번호
24719756


ON-F007




SPECIFICATIONS

LED Power	12W
Dimensions	135 x 150 x 110mm
Beam Angle	3°, 8°, 10°, 15°, 25°, 45°
CT / Color mixing	2200K -6000K / RGB / RGBW
Output (Lumen)	440- 728 lm
IP	65

Dimensions Drawing

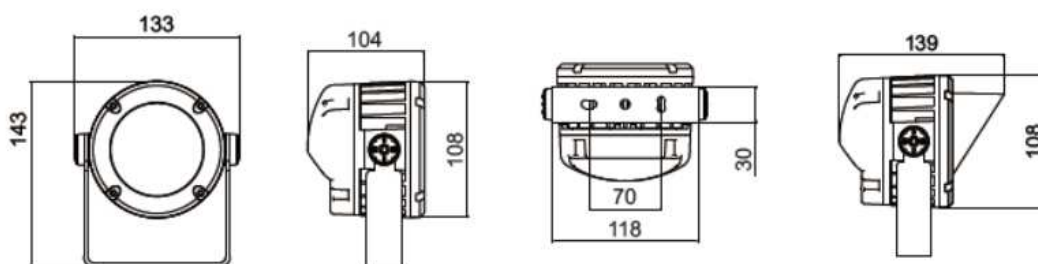

Photometric Data

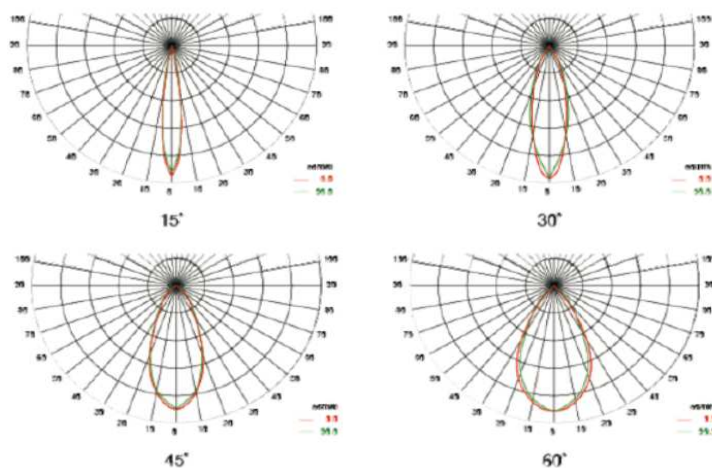

FLOOD LIGHT

나라장터 식별번호
25480407


ON-A017





SPECIFICATIONS

LED Power	12W
Dimensions	157 x 157 x 51mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW, DMX512
Output (Lumen)	979 lm
IP	66

Dimensions Drawing

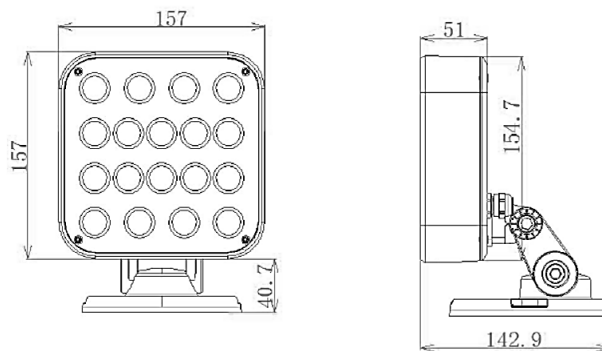

Photometric Data

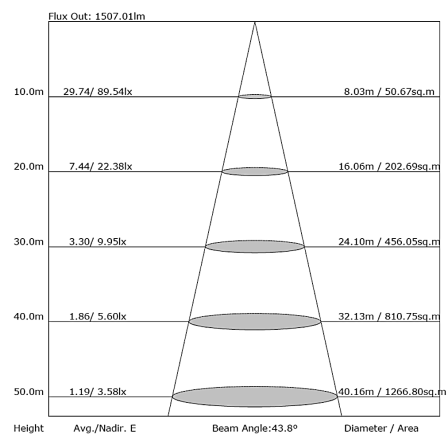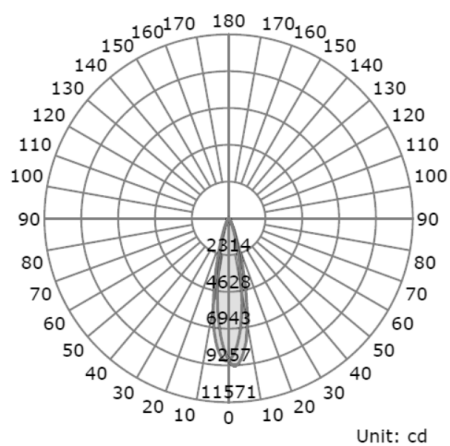

FLOOD LIGHT

나라장터 식별번호
24719774


ON-F033




SPECIFICATIONS

LED Power	12W
Dimensions	61 x 61 x 113mm
Beam Angle	Reflector: 24°, 38°, 60° / Lens : 10° 23°, 36°+honeycomb
CT / Color mixing	2700K , 3000K , 4000K, 6000K
Weight	0.5 KG
IP	66


Dimensions Drawing

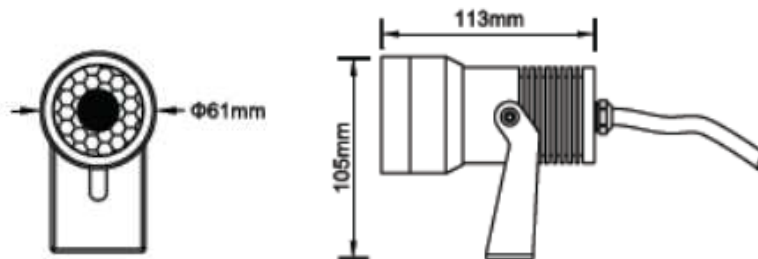

Photometric Data

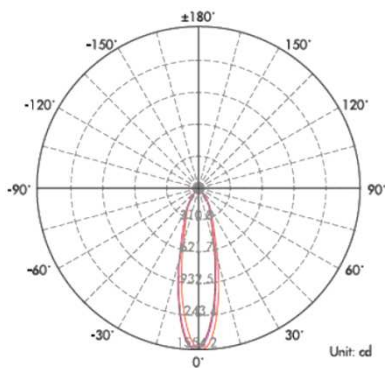

Height	Center I	Average I	Beam Angle
3.281ft 1.0m	143.73fc 1547.1lx	213.183fc 2294.707lx	1.520ft 0.463m
6.562ft 2.0m	35.933fc 386.791lx	53.296fc 573.677lx	3.040ft 0.927m
9.843ft 3.0m	15.970fc 171.91lx	23.687fc 254.967lx	4.561ft 1.390m
13.123ft 4.0m	8.983fc 96.697lx	13.324fc 143.419lx	6.081ft 1.851m
16.404ft 5.0m	5.749fc 61.886lx	8.527fc 91.788lx	7.601ft 2.317m



3000K, 25°

FLOOD LIGHT

나라장터 식별번호
25480497


ON-A083





SPECIFICATIONS

LED Power	12W
Dimensions	61 x 61 x 113mm
Beam Angle	Zoom 10° to 60° adjustable
CT / Color mixing	2700K , 3000K , 4000K, 6000K
Weight	0.62 KG
IP	66

Dimensions Drawing

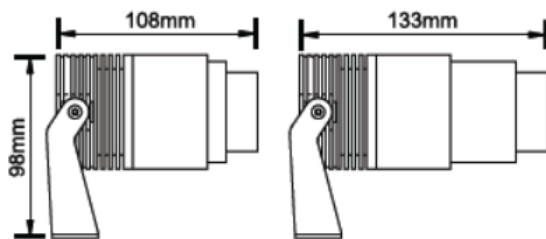

Photometric Data

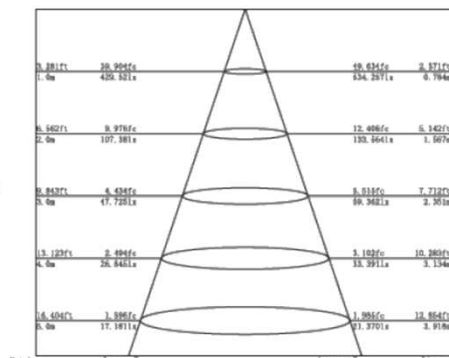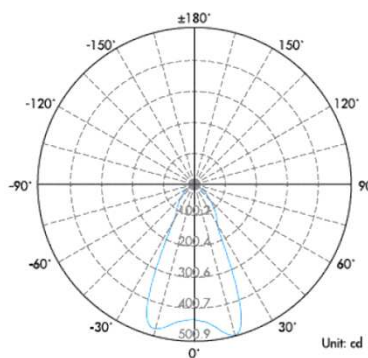

3000K, 60°

FLOOD LIGHT

나라장터 식별번호
25480495


ON-A081




SPECIFICATIONS

LED Power	12W (Under water)
Dimensions	145 x 120 x 47mm
Beam Angle	6°, 8°, 10°, 17°, 23°, 28°, 43°
CT / Color mixing	RGBW3000K or RGBW4000K or RGBW5500K
Weight	1.05 KG
IP	68

Dimensions Drawing

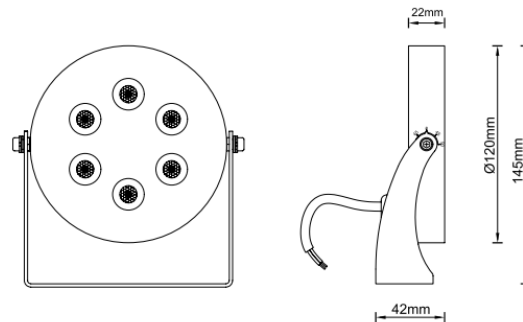


Photometric Data

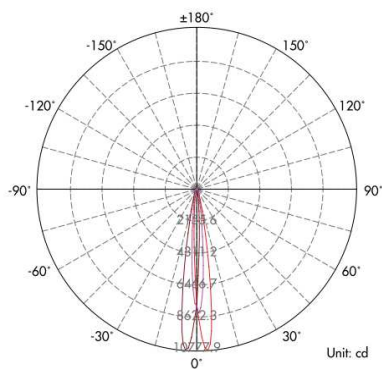

Height	Center E	Average E	Diameter
1.281ft	725.43fc	412.433fc	0.586ft
1.0m	768.51x	4562.238lx	0.173m
6.583ft	191.36fc	153.108fc	1.173ft
2.0m	1952.11x	1648.657lx	0.357m
9.843ft	80.603fc	68.048fc	1.759ft
3.0m	807.611x	732.470lx	0.530m
13.123ft	45.339fc	38.277fc	2.345ft
4.0m	488.631x	412.011lx	0.719m
16.404ft	29.017fc	24.497fc	2.932ft
5.0m	312.341x	263.689lx	0.894m

Beam Angle: 10.2°



FLOOD LIGHT

나라장터 식별번호
24719775


ON-F034




SPECIFICATIONS

LED Power	15W
Dimensions	61 x 61 x 100mm
Beam Angle	25°, 38°, 60° (lens 10°23°36° + honey comb optional)
CT / Color mixing	2700K , 3000K , 4000K, 6000K
Weight	0.58 KG
Output (Lumen)	1200-1350 lm
IP	66

Dimensions Drawing

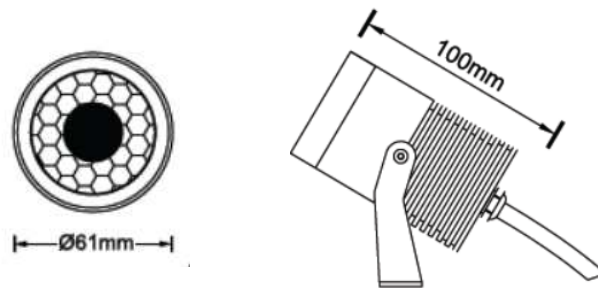

Photometric Data

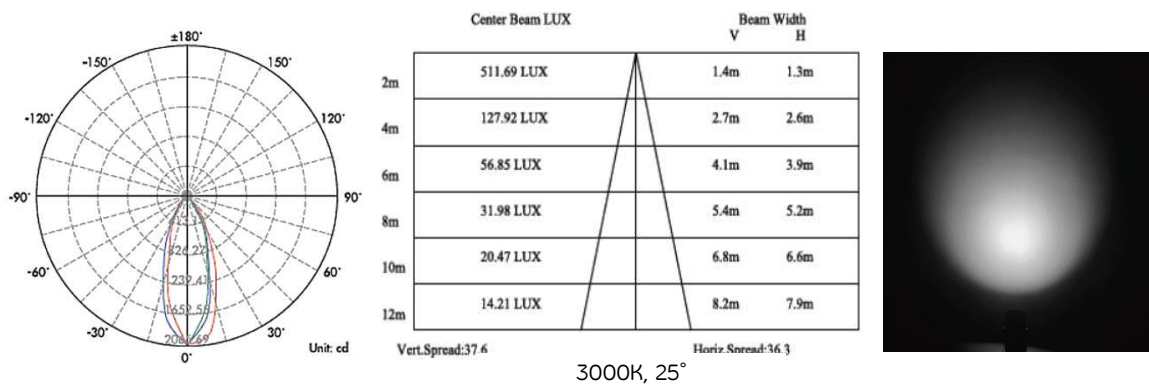

FLOOD LIGHT

나라장터 식별번호
25677664


ON-A154




SPECIFICATIONS

LED Power	15W
Dimensions	95 x 62 x 185mm
Beam Angle	90°
CT / Color mixing	2700K , 3000K , 4000K, 5700K, 6500K
Weight	0.9 KG
Output (Lumen)	2100 lm
IP	65

Dimensions Drawing

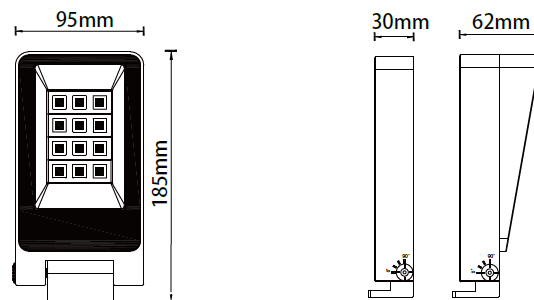

Photometric Data

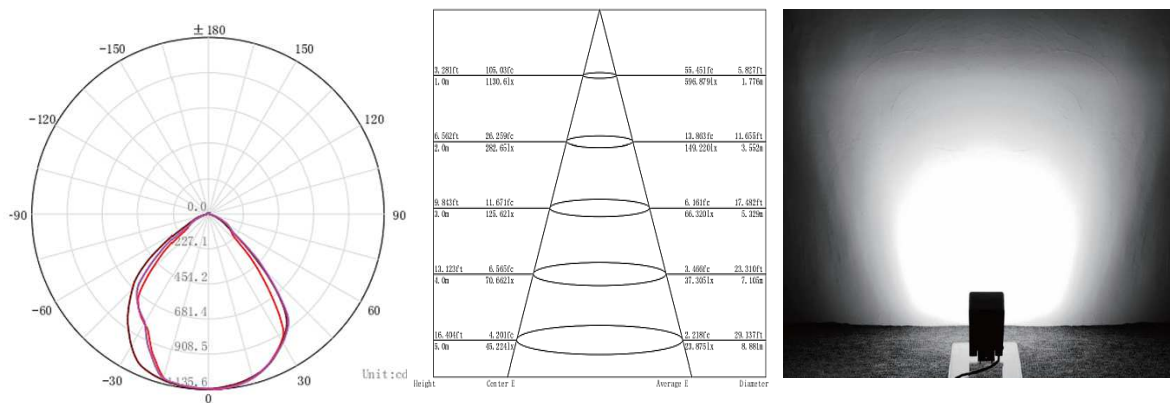

3000K, 90°

FLOOD LIGHT

나라장터 식별번호
25480511


ON-A097




SPECIFICATIONS

LED Power	15W
Dimensions	95 x 95 x 105mm
Beam Angle	10° , 15° , 24° , 36° , 60°
CT / Color mixing	2700K , 3000K , 4000K, 5700K, 6500K
Weight	1 KG
IP	65

Dimensions Drawing

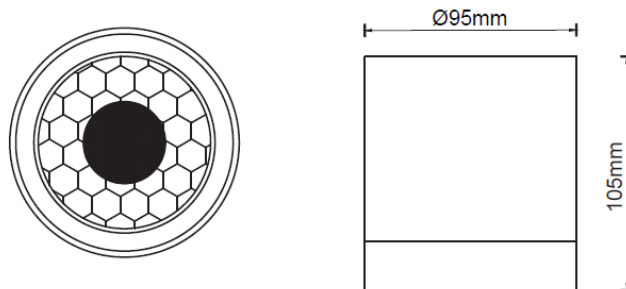

Photometric Data

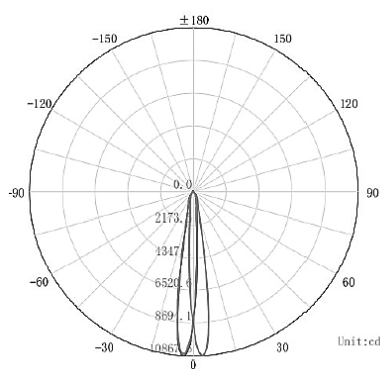

1.284lx	794.13lx	656.73lx	0.672lx
1.0m	6598.01lx	7009.140lx	0.20lx
0.563lx	196.53lx	164.18lx	1.34lx
2.0m	2137.01lx	1167.26lx	0.41lx
0.44lx	88.23lx	72.97lx	2.01lx
3.0m	949.78lx	783.60lx	0.64lx
0.123lx	39.63lx	41.69lx	2.68lx
4.0m	531.25lx	441.82lx	0.82lx
0.40lx	31.78lx	36.27lx	3.36lx
5.0m	341.82lx	392.70lx	1.62lx



3000K, 15°

FLOOD LIGHT

나라장터 식별번호
24719722


ON-F019




SPECIFICATIONS

LED Power	15W (Under water)
Dimensions	59 x 59 x 103mm
Beam Angle	10°, 23°, 36°
CT / Color mixing	2700K, 3000K, 4000K, 6000K, RGBW
Output (Lumen)	1000-1050 lm
Weight	1.15 KG
IP	68

Dimensions Drawing

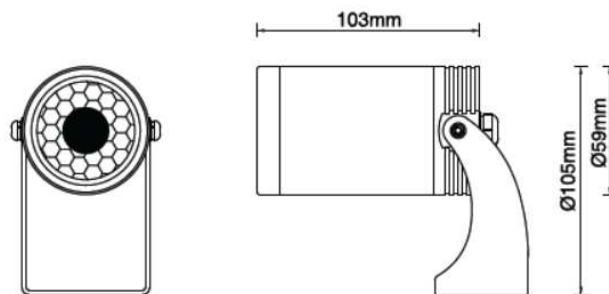

Photometric Data

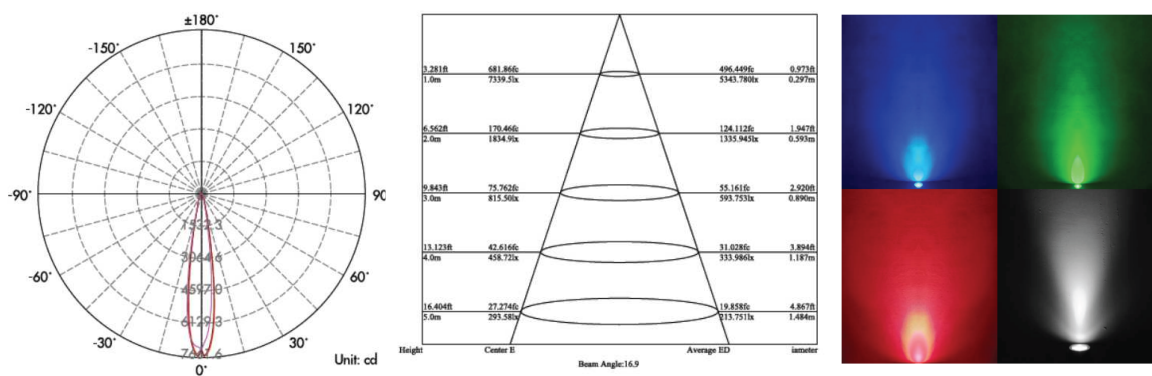

3000K, 10°

FLOOD LIGHT

나라장터 식별번호
25480405


ON-A015





SPECIFICATIONS

LED Power	18W
Dimensions	148 x 148 x 149mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	1597 lm
IP	66

Dimensions Drawing

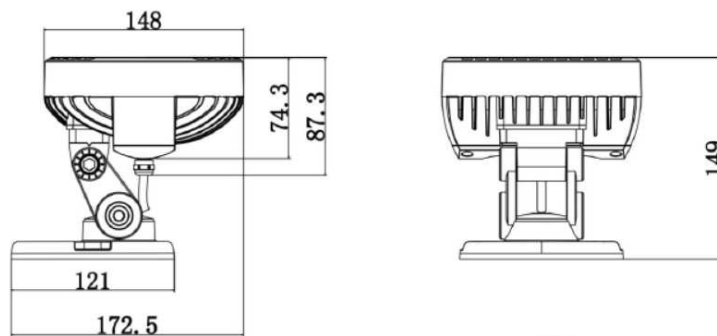

Photometric Data

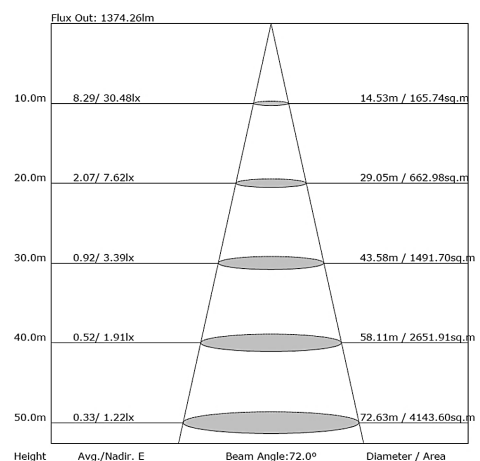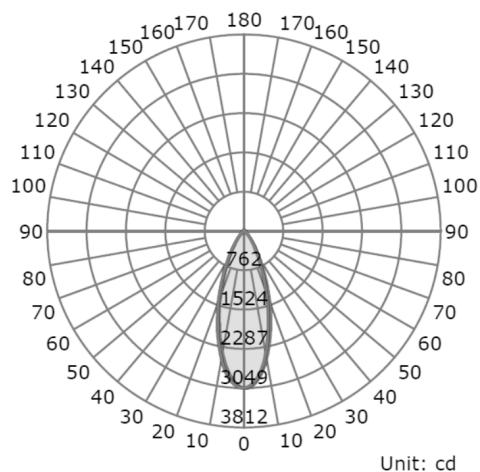

FLOOD LIGHT

나라장터 식별번호
24719758


ON-F008




SPECIFICATIONS

LED Power	18W
Dimensions	180 x 160 x 115mm
Beam Angle	3°, 8°, 10°, 15°, 25°, 45°
CT / Color mixing	2200K - 6000K / RGB / RGBW
Output (Lumen)	1090 lm
IP	65

Dimensions Drawing

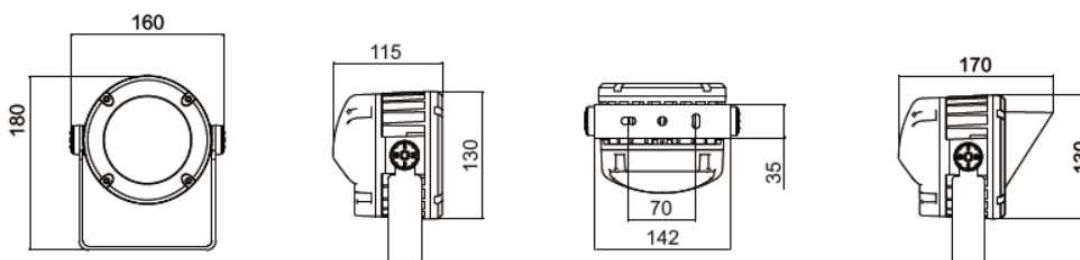

Photometric Data

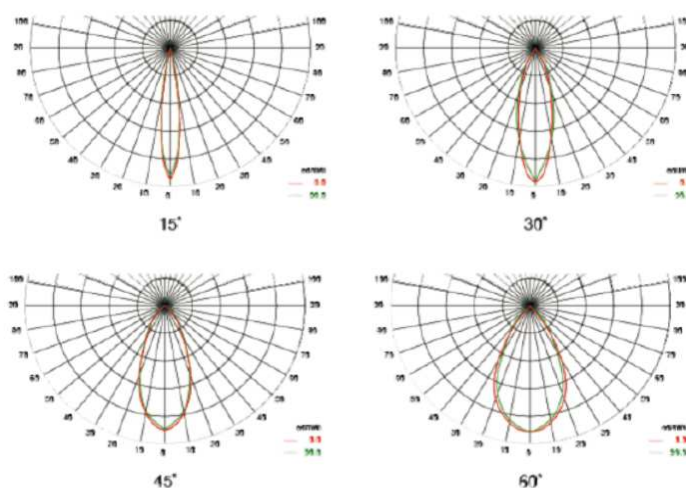

FLOOD LIGHT

나라장터 식별번호
25480428


ON-A032





SPECIFICATIONS

LED Power	18W
Dimensions	158 x 158 x 151mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	1597 lm
IP	66

Dimensions Drawing

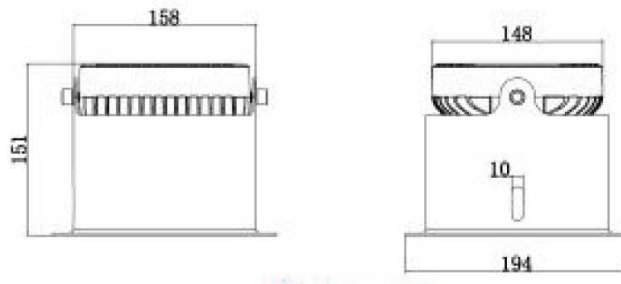

Photometric Data

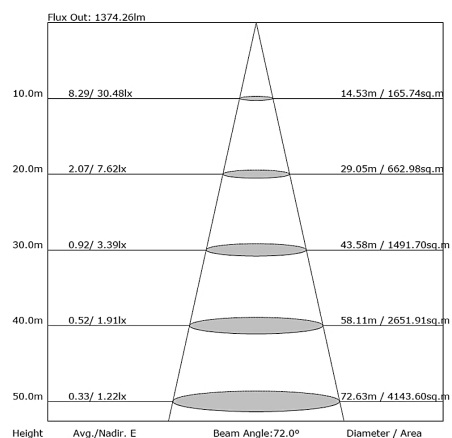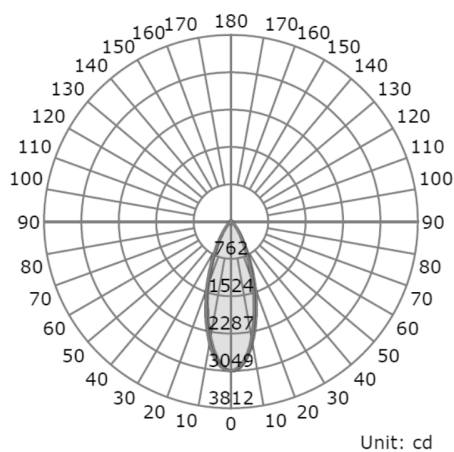

FLOOD LIGHT

나라장터 식별번호
25480406


ON-A016





SPECIFICATIONS

LED Power	24W
Dimensions	192.7 x 231.4 x 56mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	2624 lm
IP	66

Dimensions Drawing

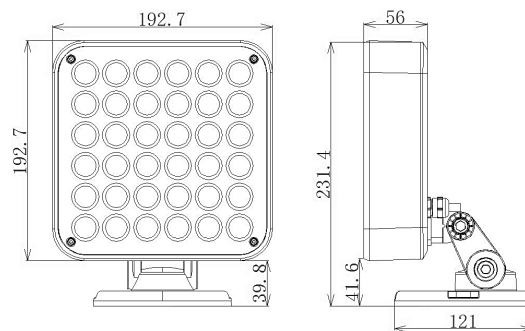

Photometric Data

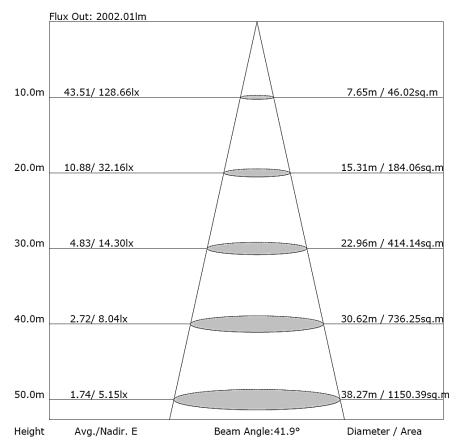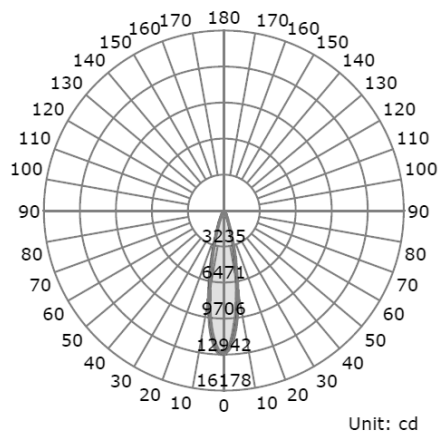

FLOOD LIGHT

나라장터 식별번호
25480427


ON-A031





SPECIFICATIONS

LED Power	24W
Dimensions	207 x 207 x 200mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	1597 lm
IP	66

Dimensions Drawing

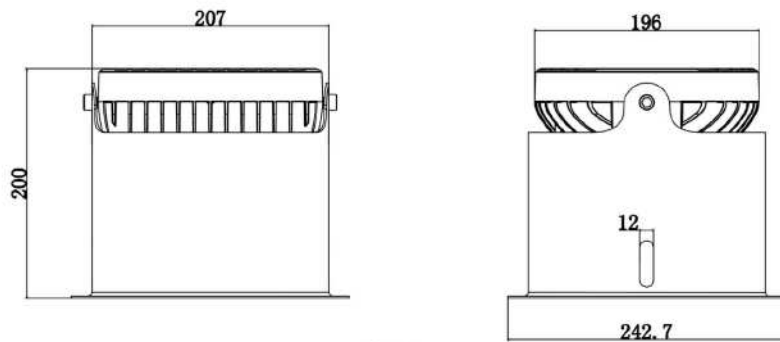

Photometric Data

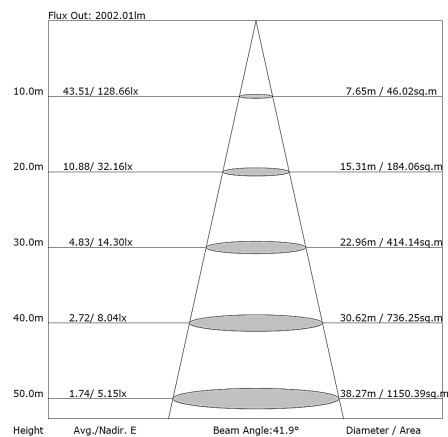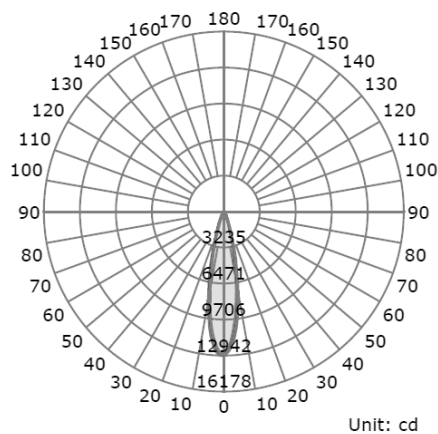

FLOOD LIGHT

나라장터 식별번호
25480512


ON-A098





SPECIFICATIONS

LED Power	25W
Dimensions	110 x 110 x 115mm
Beam Angle	10° , 15° , 24° , 36° , 60°
CT / Color mixing	2700K , 3000K , 4000K, 5700K, 6500K
Weight	1.5KG
IP	65

Dimensions Drawing

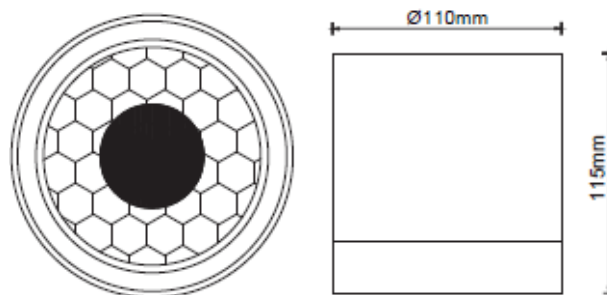

Photometric Data

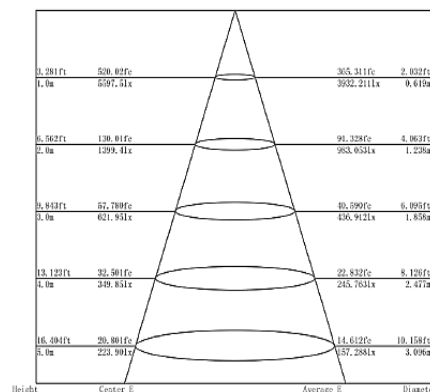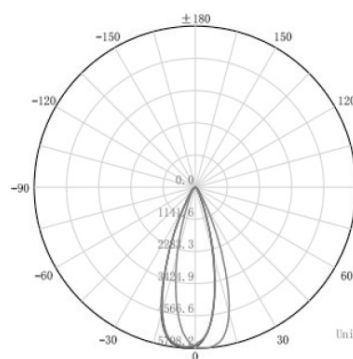

3000K, 36°

FLOOD LIGHT

나라장터 식별번호
25480498


ON-A084




SPECIFICATIONS

LED Power	25W
Dimensions	89 x 89 x 212mm
Beam Angle	Zoom 10° to 40° adjustable
CT / Color mixing	2700K , 3000K , 4000K, 6000K
Weight	1.68 KG
IP	66

Dimensions Drawing

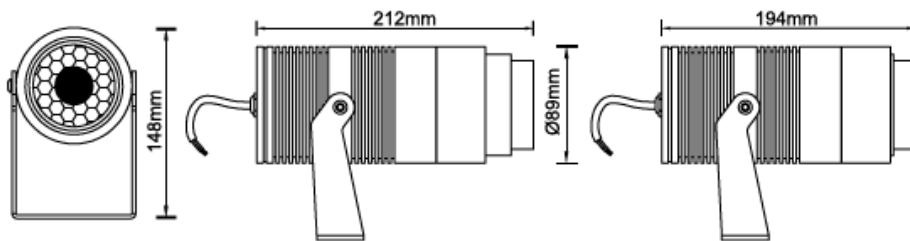

Photometric Data

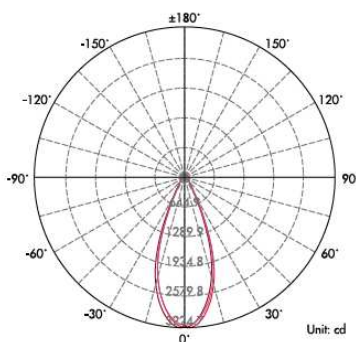

Height	Center E	Beam Angle: 39°	Average E	Diameter
3.281ft	295.27fc		202.501fc	2.333ft
1.0m	3178.3lx		2179.725lx	0.711m
6.562ft	73.818fc		50.625fc	4.666ft
2.0m	794.57lx		544.931lx	1.422m
9.843ft	32.808fc		22.500fc	6.999ft
3.0m	353.14lx		242.192lx	2.133m
13.123ft	18.454fc		12.656fc	9.332ft
4.0m	198.64lx		136.233lx	2.844m
16.404ft	11.811fc		8.100fc	11.665ft
5.0m	127.13lx		87.189lx	3.556m



3000K, 40°

FLOOD LIGHT

나라장터 식별번호
25480409


ON-A019





SPECIFICATIONS

LED Power	30W
Dimensions	250 x 155 x 188mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	2624 lm
IP	66

Dimensions Drawing

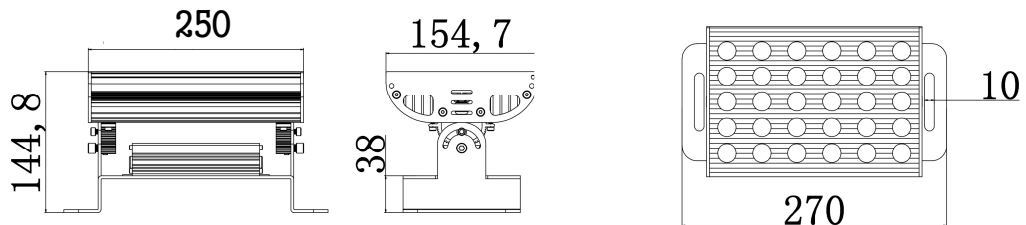

Photometric Data

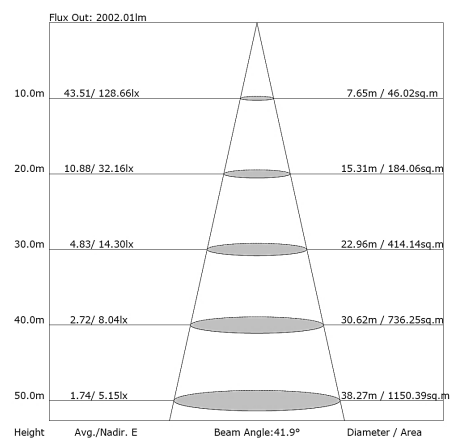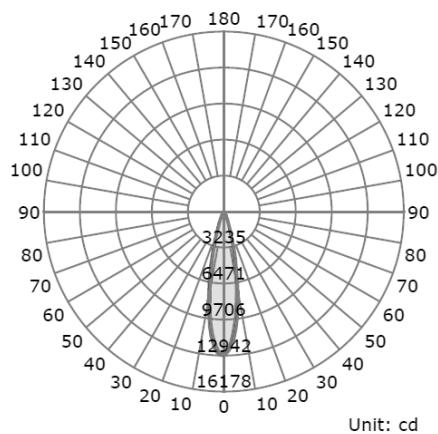

FLOOD LIGHT

나라장터 식별번호
25677655


ON-A143



SPECIFICATIONS

LED Power	30W
Dimensions	162 x 162 x 290mm
CT / Color mixing	3000K, 4000K , 6000K
Beam Angle	5 * 160°
IP	65

Dimensions Drawing

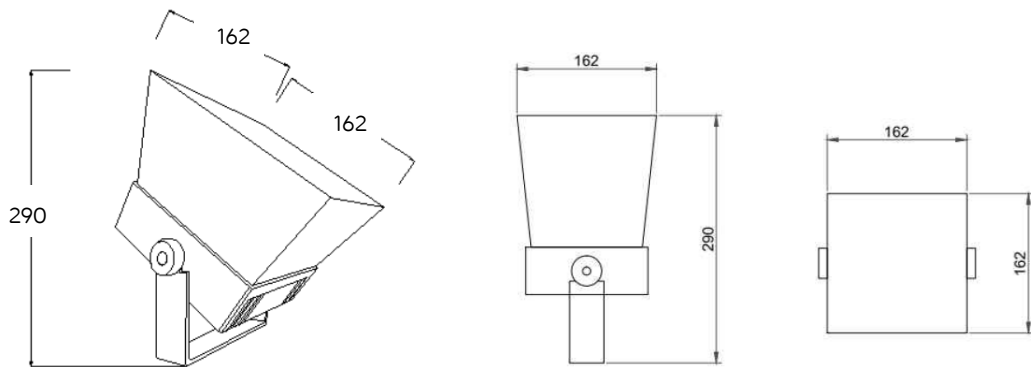

Application Case



FLOOD LIGHT

나라장터 식별번호
24719759


ON-F009




SPECIFICATIONS

LED Power	36W
Dimensions	205 x 230 x 130mm
Beam Angle	3° , 8° , 10° , 15° , 25° , 45°
CT / Color mixing	2200K -6000K / RGB / RGBW
Output (Lumen)	1300 lm
IP	65

Dimensions Drawing

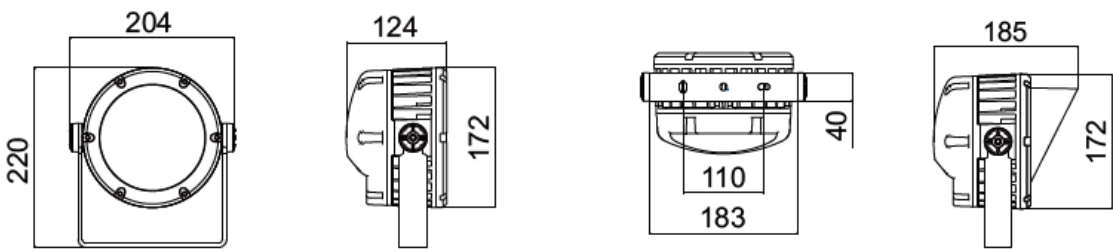

Photometric Data

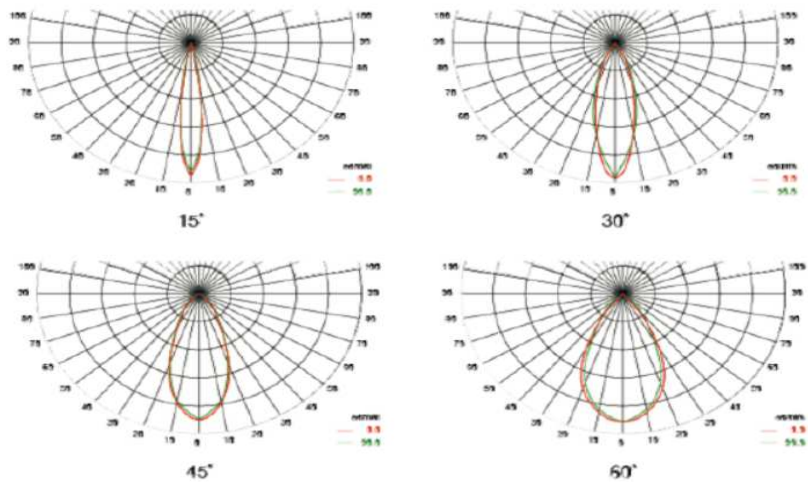

FLOOD LIGHT

나라장터 식별번호
25480404


ON-A014

SPECIFICATIONS


LED Power	36W
Dimensions	196 x 196 x 159.3 mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	3523 lm
IP	66



Dimensions Drawing

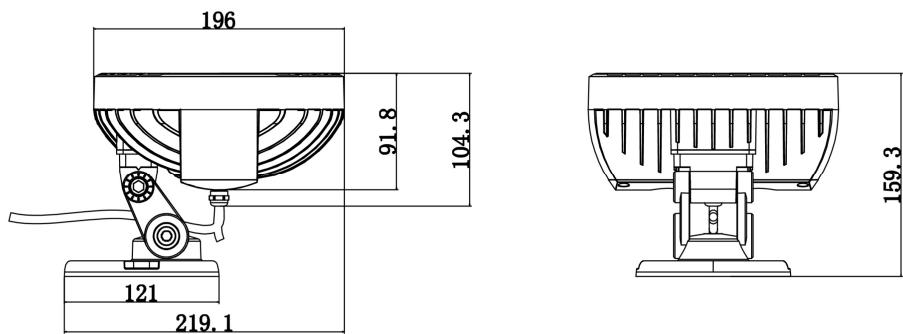

Photometric Data

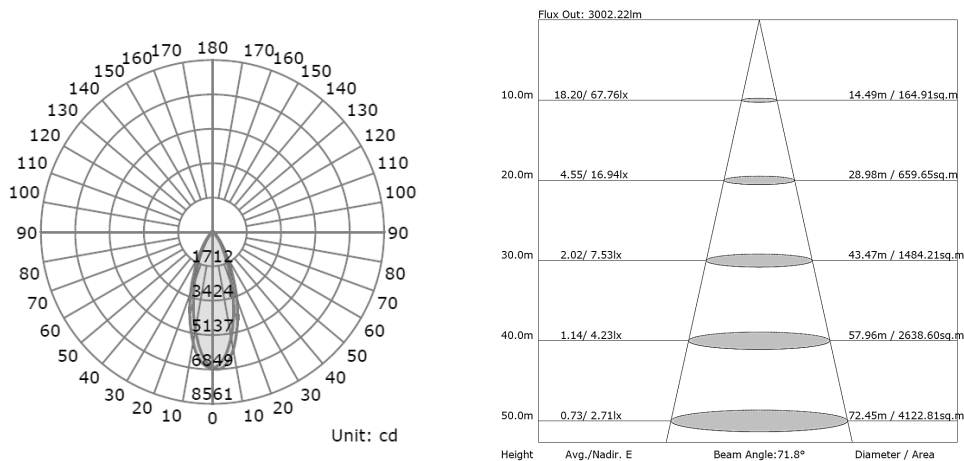

FLOOD LIGHT

나라장터 식별번호
24888526


ON-P040




SPECIFICATIONS

LED Power	36W
Dimensions	379 x 148 x 84mm
Beam Angle	20°, 30°, 40°
CT / Color mixing	1800-6000K or RGBW
Weight	1.8 KG
Output (Lumen)	440- 728 lm
IP	65

Dimensions Drawing

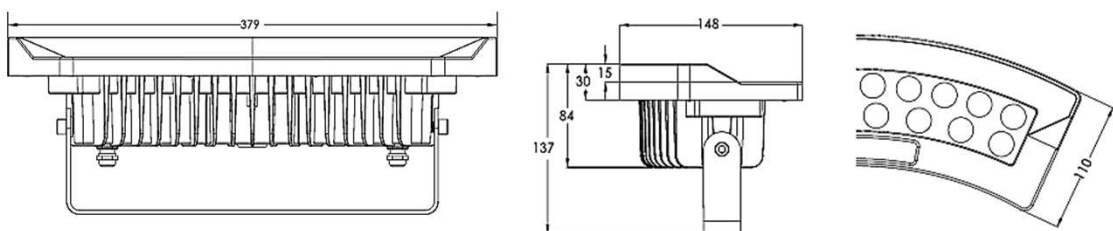

Photometric Data

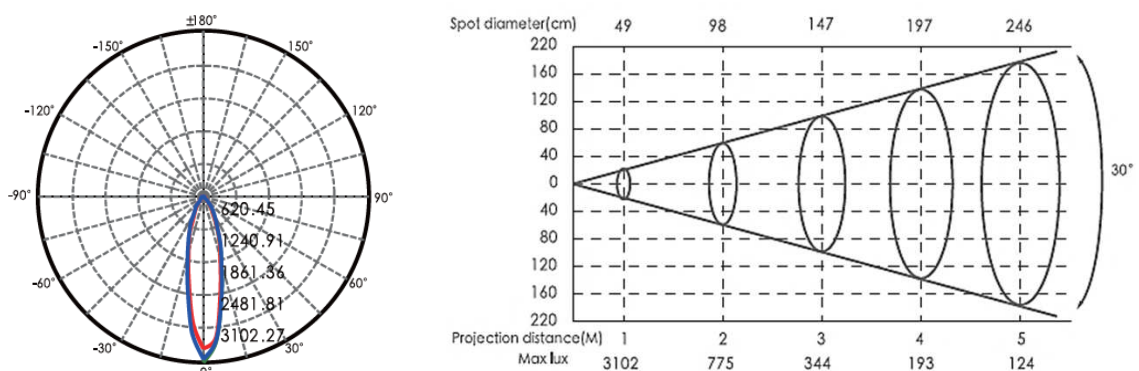

3000K, 20°

FLOOD LIGHT

나라장터 식별번호
24719751


ON-F002



SPECIFICATIONS


LED Power	40W
Dimensions	179 x 127 x 177mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	1001 lm
Weight	1.8 KG
IP	67

Dimensions Drawing

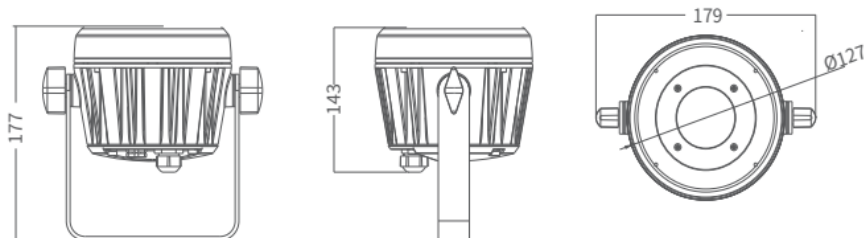

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

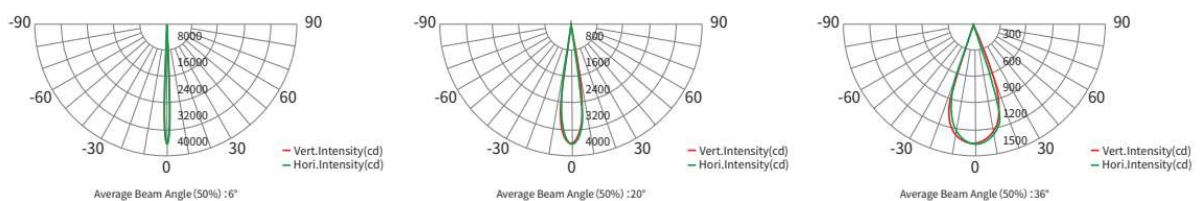

FLOOD LIGHT

나라장터 식별번호
25480399


ON-A009



SPECIFICATIONS


LED Power	40W
Dimensions	179 x 113 x 177mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	5606 lm
Weight	8.2 KG
IP	67

Dimensions Drawing

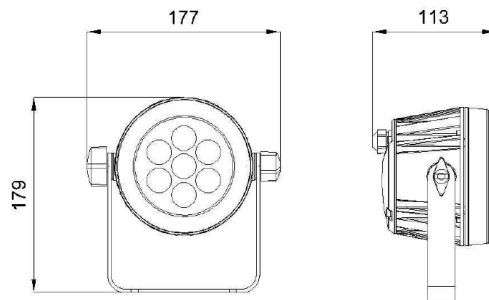

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

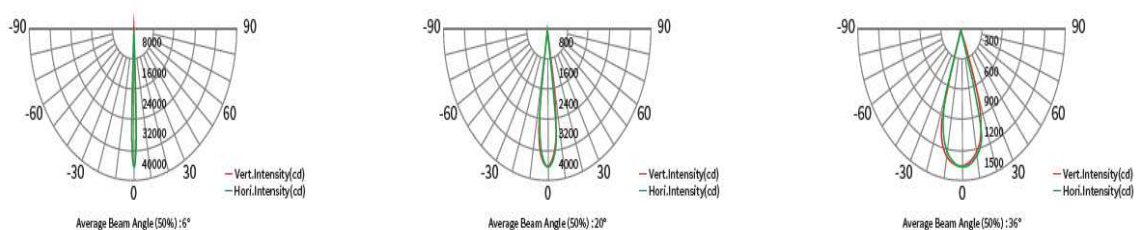

FLOOD LIGHT

나라장터 식별번호
25480412


ON-A022




SPECIFICATIONS

LED Power	48W
Dimensions	250 x 200 x 239.5 mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	3651 lm
IP	66

Dimensions Drawing

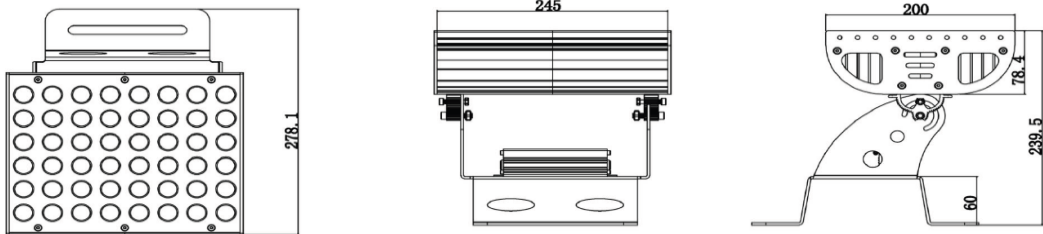

Photometric Data

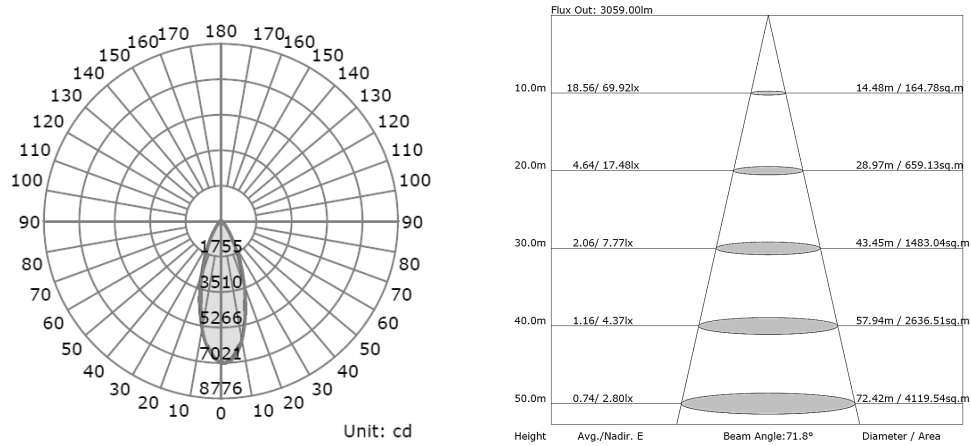

FLOOD LIGHT

나라장터 식별번호
25677656


ON-A144




SPECIFICATIONS

LED Power	50W
Dimensions	215 x 215 x 290mm
CT / Color mixing	3000K, 4000K , 6000K
Beam Angle	5 * 160°
IP	65

Dimensions Drawing

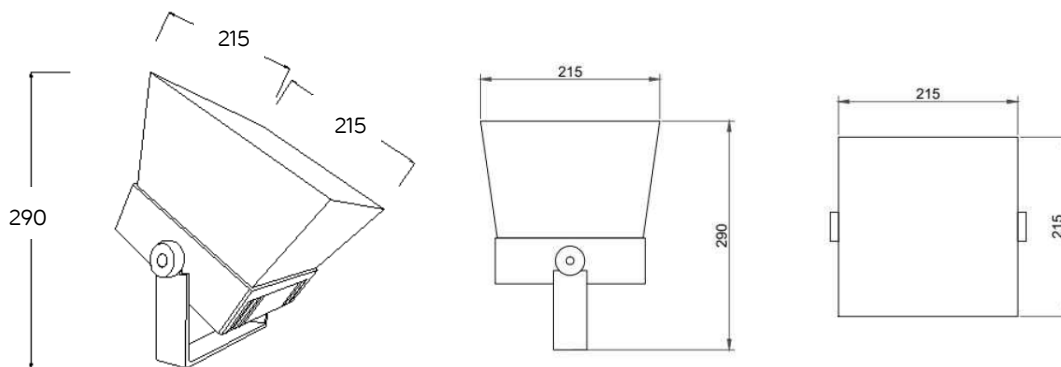

Application Case

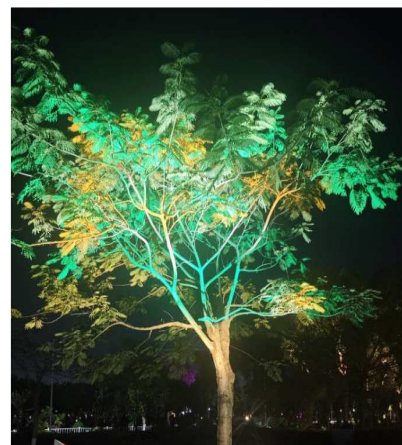

FLOOD LIGHT

나라장터 식별번호
25480410


ON-A020





SPECIFICATIONS

LED Power	60W
Dimensions	494 x 155 x 188 mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	5248 lm
IP	66

Dimensions Drawing

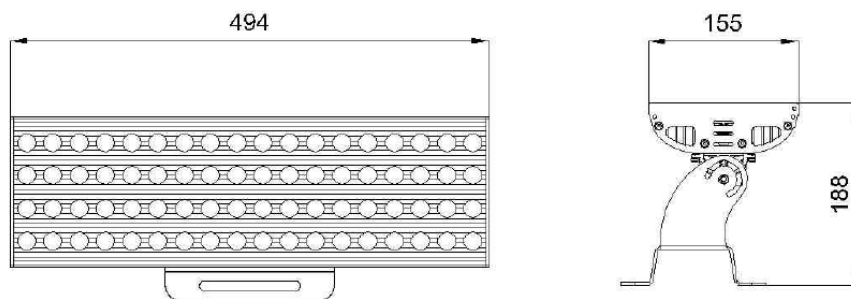

Photometric Data

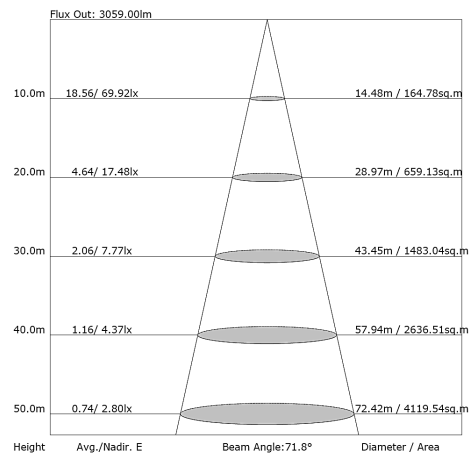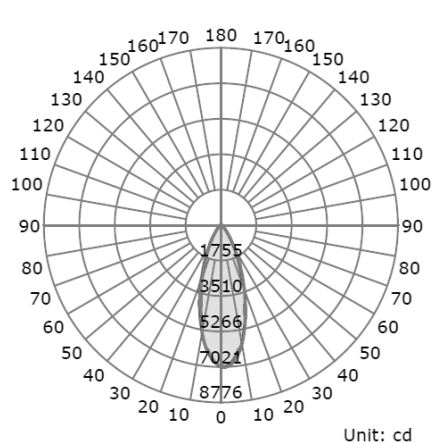

FLOOD LIGHT

나라장터 식별번호
24719752


ON-F003




SPECIFICATIONS

LED Power	60W
Dimensions	206 x 208 x 204 mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	1658 lm
Weight	4.2 KG
IP	67


Dimensions Drawing

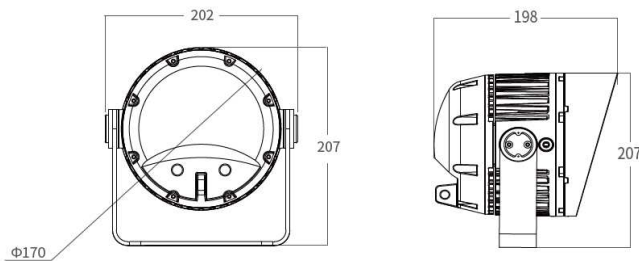

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

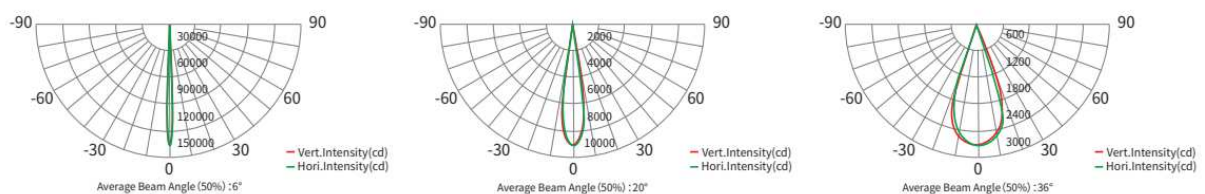

FLOOD LIGHT

나라장터 식별번호
25480429


ON-A033





SPECIFICATIONS

LED Power	72W
Dimensions	308 x 200 x 251.3mm
Beam Angle	3°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	7053 lm
IP	66

Dimensions Drawing

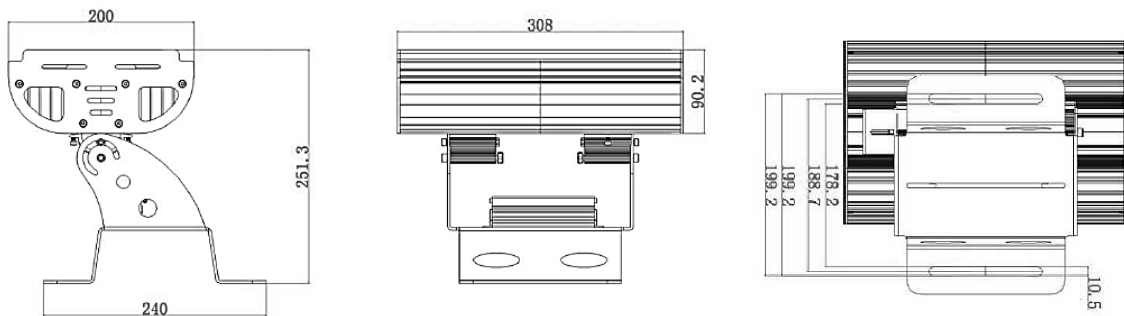

Photometric Data

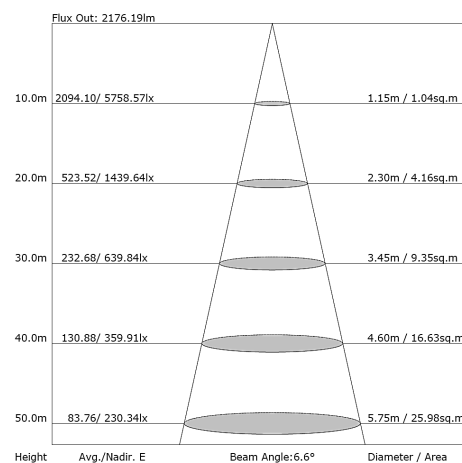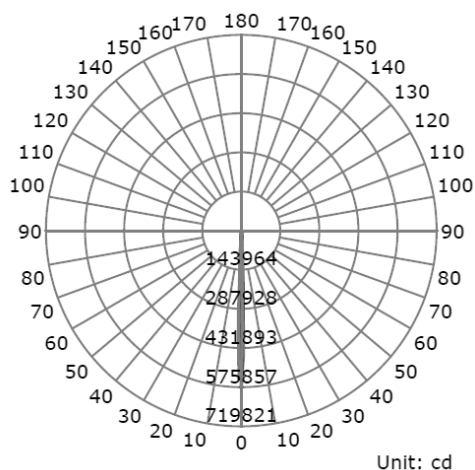

FLOOD LIGHT

나라장터 식별번호
24719769


ON-F017



SPECIFICATIONS

LED Power	72W
Dimensions	500 x 84 x 150mm
Beam Angle	3° , 8° , 10° , 15° , 25° , 45°
CT / Color mixing	2200K - 6000K / RGB / RGBW
Output (Lumen)	6650 lm
IP	65

Dimensions Drawing

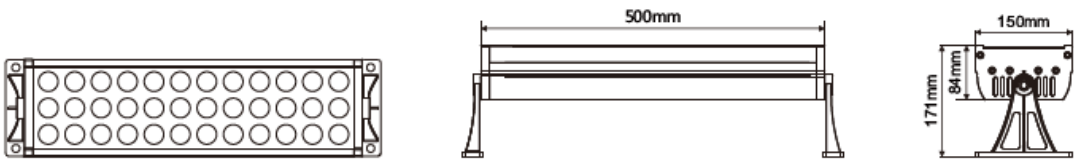

Photometric Data

3m	91.55 lx	11cm
6m	23.13 lx	22cm
9m	10.17 lx	32cm
12m	5.72 lx	42cm
15m	3.66 lx	55cm
H	Eavg	3° Diameter

3m	183.1 lx	22cm
6m	46.27 lx	44cm
9m	20.34 lx	65cm
12m	11.44 lx	85cm
15m	7.32 lx	111cm
H	Eavg	5° Diameter

3m	366.2 lx	44cm
6m	91.55 lx	88cm
9m	40.69 lx	133cm
12m	22.89 lx	177cm
15m	14.65 lx	222cm
H	Eavg	8° Diameter

FLOOD LIGHT

나라장터 식별번호
24719761


ON-F011




SPECIFICATIONS

LED Power	72W
Dimensions	265 x 290 x 140mm
Beam Angle	3° , 8° , 10° , 15° , 25° , 45°
CT / Color mixing	2200K - 6000K / RGB / RGBW
Output (Lumen)	6539 lm
IP	65

Dimensions Drawing

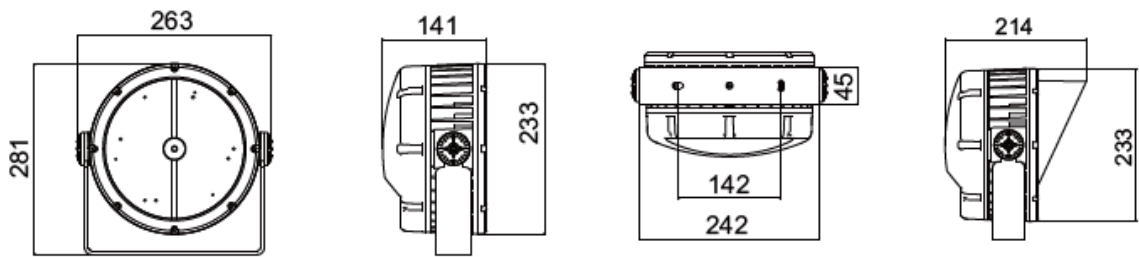

Photometric Data

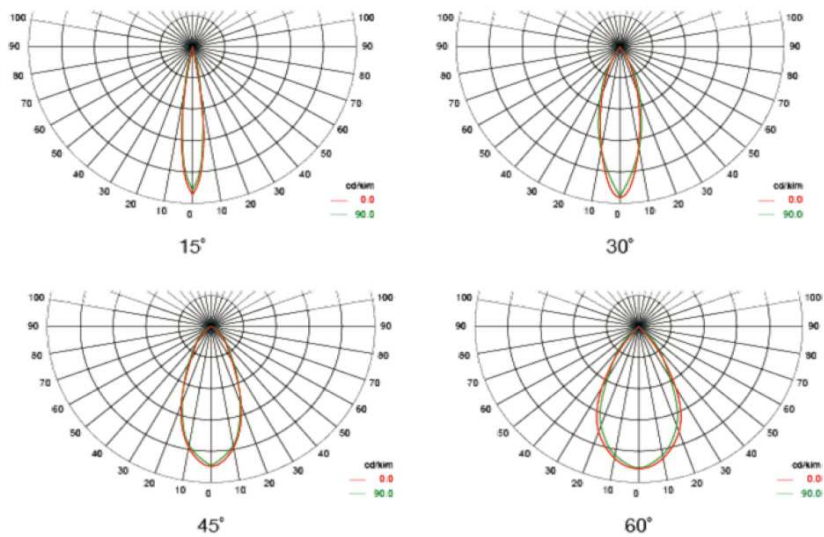

FLOOD LIGHT

나라장터 식별번호
24888484


ON-F052




SPECIFICATIONS

LED Power	100W
Dimensions	206 x 208 x 204 mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	2979 lm
Weight	4.2 KG
IP	67


Dimensions Drawing

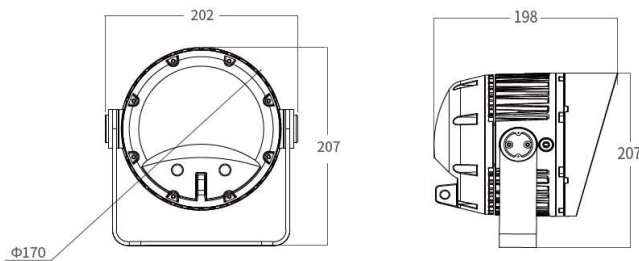

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System




Color Temperature Segment



24 Color Card



Photometric Data

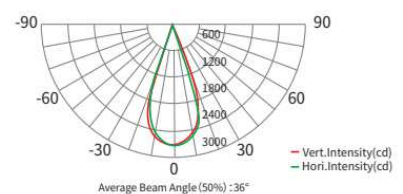

FLOOD LIGHT

나라장터 식별번호
25480400


ON-A010




SPECIFICATIONS

LED Power	100W
Dimensions	206 x 146 x 208 mm
Beam Angle	15°, 30°, 45°, 60°, 15°*30°, 15°*60°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	6029 lm
Weight	4.5 KG
IP	66


Dimensions Drawing

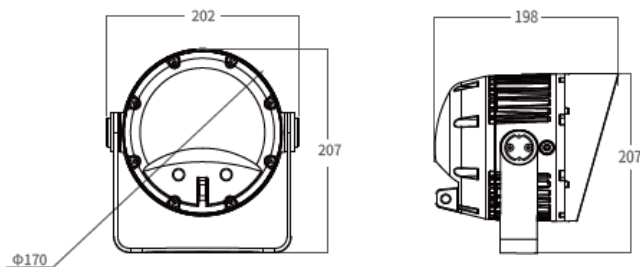

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System




Color Temperature Segment



24 Color Card



Photometric Data

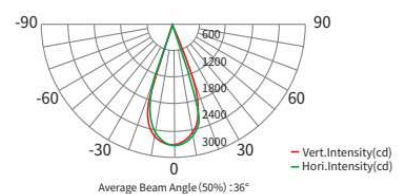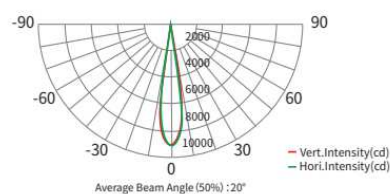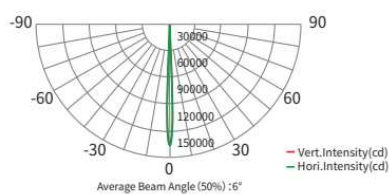

FLOOD LIGHT

나라장터 식별번호
25480402


ON-A012



SPECIFICATIONS


LED Power	100W
Dimensions	305 x 70 x 301 mm
Beam Angle	15°, 30°, 45°, 60°, 15°*30°, 15°*60°
CT / Color mixing	4 in 1 RGBL + 1800K-10000K
Output (Lumen)	6317 lm
Weight	5.9 KG
IP	66

Dimensions Drawing

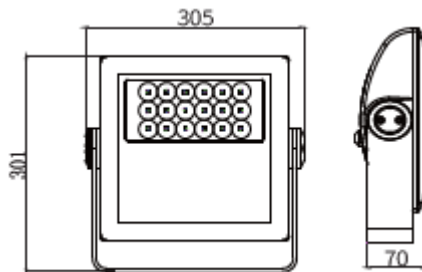

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

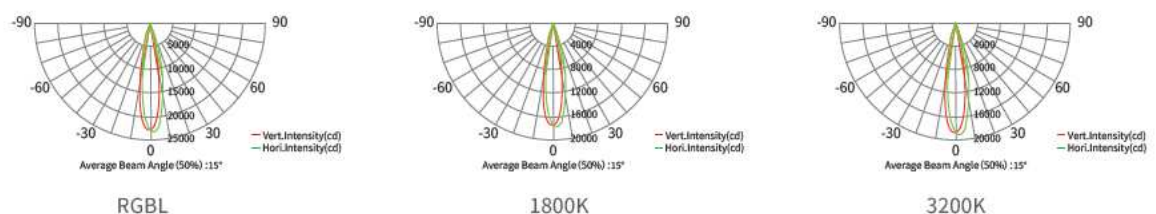

FLOOD LIGHT

나라장터 식별번호
24719768


ON-F016



SPECIFICATIONS

LED Power	114W
Dimensions	196 x 191 x 500mm
Beam Angle	3°, 8°, 10°, 15°, 25°, 45°
CT / Color mixing	2200K - 6000K / RGB / RGBW
Output (Lumen)	10530 lm
IP	65

Dimensions Drawing

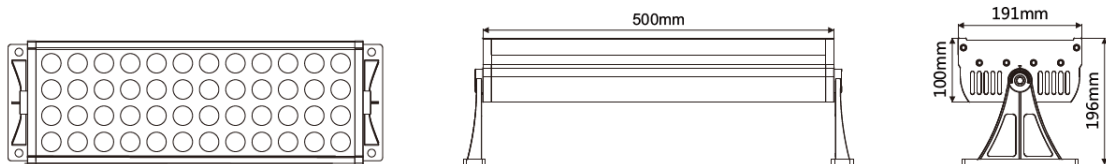

Photometric Data

3m	91.55 lx	11cm
6m	23.13 lx	22cm
9m	10.17 lx	32cm
12m	5.72 lx	42cm
15m	3.66 lx	55cm
H	Eavg	3° Diameter

3m	183.1 lx	22cm
6m	46.27 lx	44cm
9m	20.34 lx	65cm
12m	11.44 lx	85cm
15m	7.32 lx	111cm
H	Eavg	5° Diameter

3m	366.2 lx	44cm
6m	91.55 lx	88cm
9m	40.69 lx	133cm
12m	22.89 lx	177cm
15m	14.65 lx	222cm
H	Eavg	8° Diameter

FLOOD LIGHT

나라장터 식별번호
25480411


ON-A021




SPECIFICATIONS

LED Power	144W
Dimensions	494 x 329.3 x 185.7mm
Beam Angle	6°, 9°, 10°, 15°, 30°, 45°, 90°, 120°
CT / Color mixing	1800-6500K, RGB, RGBW
Output (Lumen)	12595 lm
IP	66

Dimensions Drawing

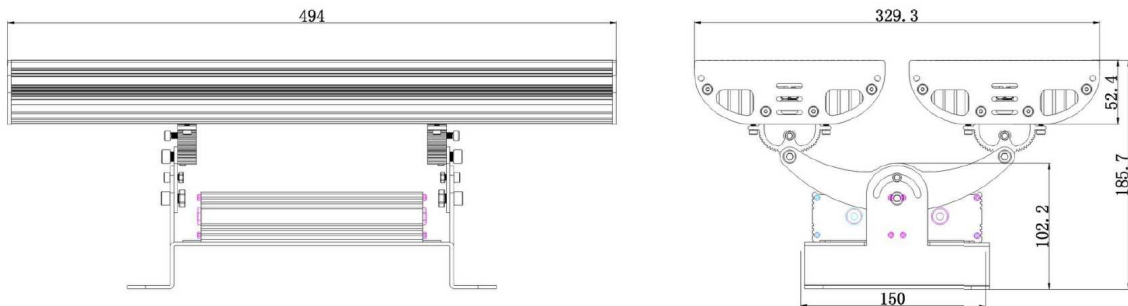

Photometric Data

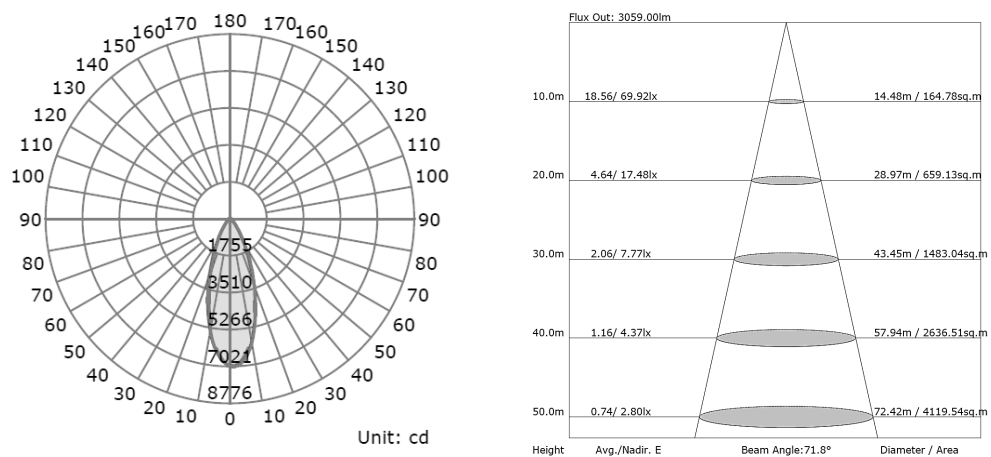

FLOOD LIGHT

나라장터 식별번호
25480403


ON-A013



SPECIFICATIONS


LED Power	150W
Dimensions	370 x 81 x 307 mm
Beam Angle	15°, 30°, 45°, 60°, 15°*30°, 15°*60°
CT / Color mixing	4 in 1 RGBL + 1800K-10000K
Output (Lumen)	12994 lm
Weight	7.6 KG
IP	66

Dimensions Drawing

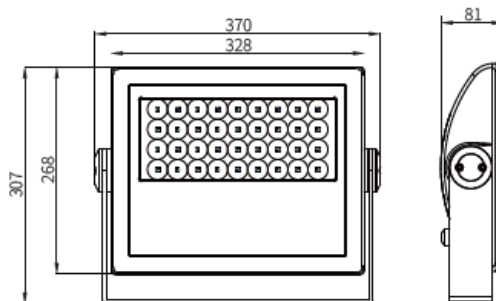

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

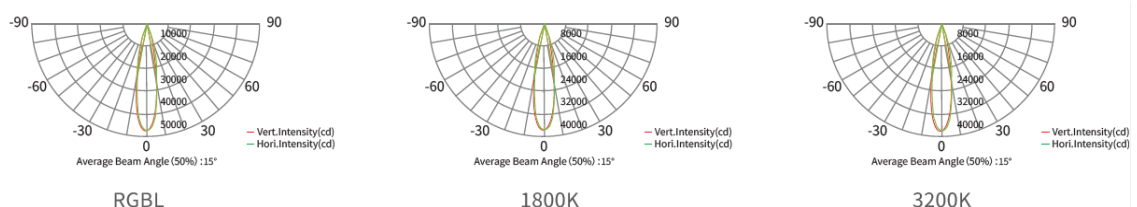

FLOOD LIGHT

나라장터 식별번호
24888529


ON-F065




SPECIFICATIONS

LED Power	155W
Dimensions	312 x 253 x 349 mm
Beam Angle	10°-55 °
CT / Color mixing	2200-6500K
Weight	5.8 KG
Output (Lumen)	2000 lm
IP	65

Dimensions Drawing

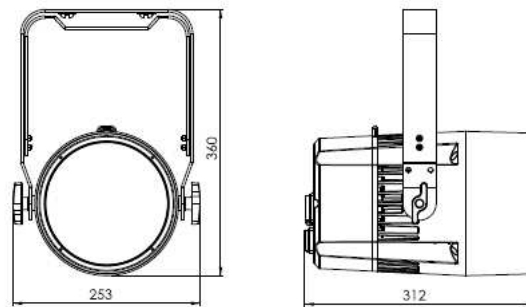

Photometric Data

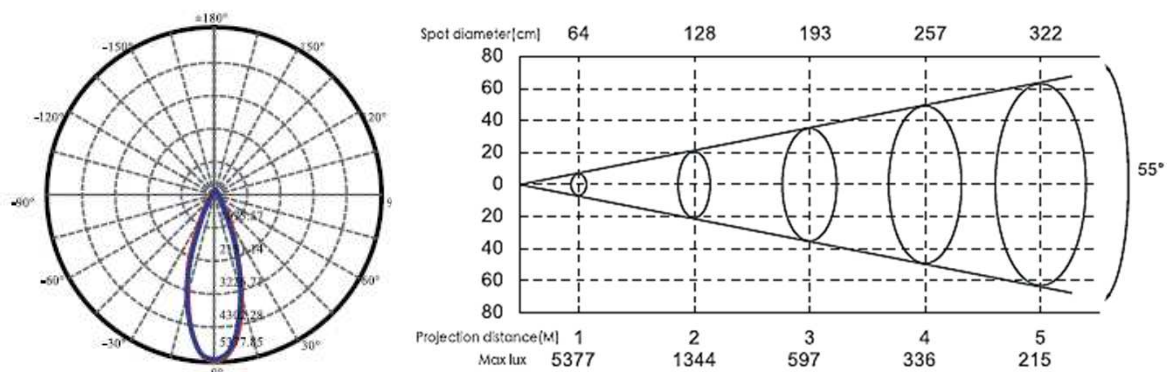

FLOOD LIGHT

나라장터 식별번호
24888485


ON-F053




SPECIFICATIONS

LED Power	180W
Dimensions	284 x 250 x 283mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	5606 lm
Weight	8.2 KG
IP	67


Dimensions Drawing

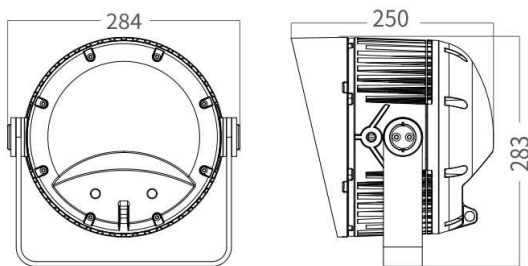

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

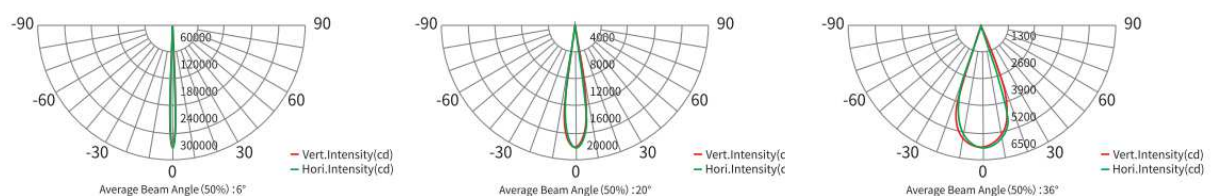

FLOOD LIGHT

나라장터 식별번호
25480401


ON-A011




SPECIFICATIONS

LED Power	180W
Dimensions	284 x 250 x 283mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	5606 lm
Weight	8.2 KG
IP	67


Dimensions Drawing

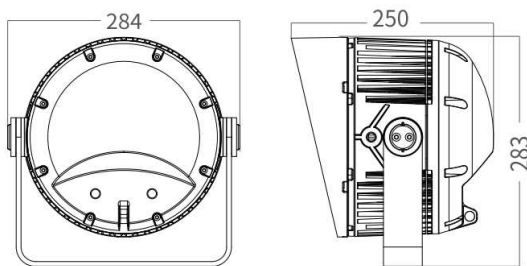

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System




Color Temperature Segment



24 Color Card



Photometric Data

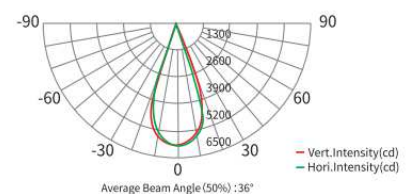

FLOOD LIGHT

나라장터 식별번호
25556746


ON-A134





SPECIFICATIONS

LED Power	200W
Dimensions	283 x 249 x 283mm
Beam Angle	15°, 30°, 45°, 60°, 15°*30°, 15°*60°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	13350 lm
Weight	8.7 KG
IP	66

Dimensions Drawing

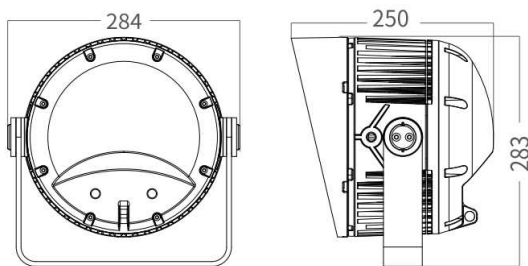

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter

Filter framer kit (white)

Color Consistency System


Color Temperature Segment




24 Color Card




Photometric Data



RGBL



1800K



3200K

FLOOD LIGHT

나라장터 식별번호
25485762


ON-A130





SPECIFICATIONS

LED Power	280W
Dimensions	347 x 258 x 381mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	8079 lm
Weight	12 KG
IP	67

Dimensions Drawing

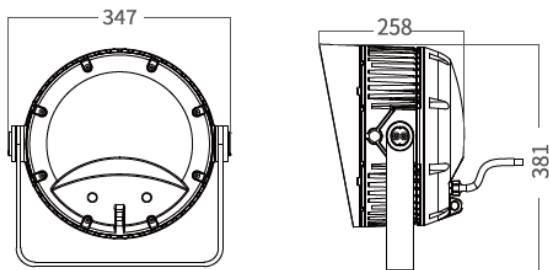

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter

Filter framer kit (white)

Color Consistency System




Color Temperature Segment



24 Color Card



Photometric Data

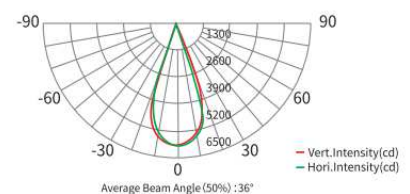

FLOOD LIGHT

나라장터 식별번호
24930252 / 25485763


ON-F074 / A131



SPECIFICATIONS


LED Power	300W / 295W
Dimensions	521 x 284 x 119mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	10160 lm
Weight	11.4 KG
IP	67

Dimensions Drawing

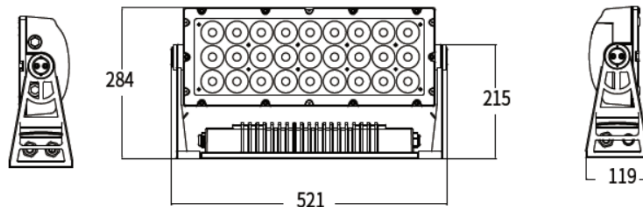

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

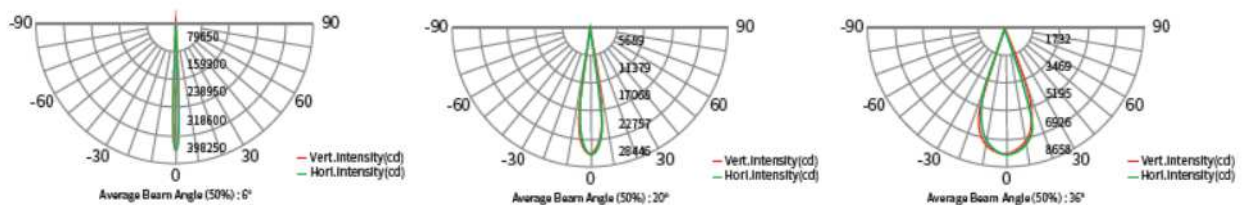

FLOOD LIGHT

나라장터 식별번호
24888486


ON-F054




SPECIFICATIONS

LED Power	400W
Dimensions	423 x 443 x 285mm
Beam Angle	6°, 10°, 15°, 20°, 30°, 36°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	11128 lm
Weight	17.5 KG
IP	67


Dimensions Drawing

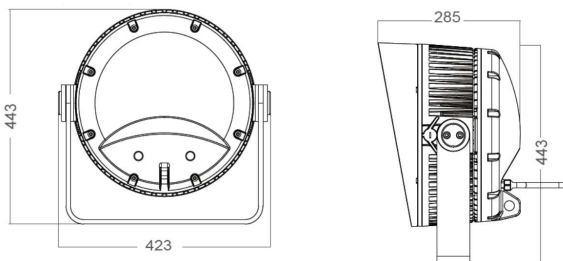

Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System


Color Temperature Segment



24 Color Card



Photometric Data

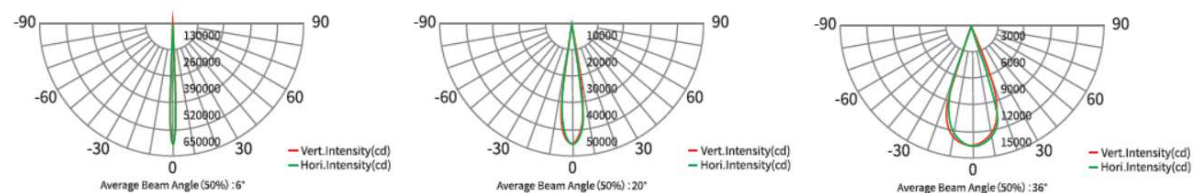

FLOOD LIGHT

나라장터 식별번호
25556747



ON-A135




SPECIFICATIONS

LED Power	400W
Dimensions	347 x 381 x 258mm
Beam Angle	15°, 30°, 45°, 60°, 15°*30°, 15°*60°
CT / Color mixing	Multiple Color (RGBL,,RGBW)
Output (Lumen)	27219 lm
Weight	12 KG
IP	66


Dimensions Drawing



Optional Accessories




55° Holographic filter
40° Holographic filter
20° Holographic filter
60°x10° Holographic filter



Filter framer kit (white)

Color Consistency System




Color Temperature Segment



24 Color Card



Photometric Data

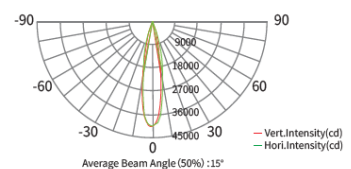

BOLLARD LIGHT

나라장터 식별번호
24888513


ON-B007



SPECIFICATIONS

LED Power	3W
Dimensions	200 x 200 x 400mm
Beam Angle	120°
CT / Color mixing	3000-6500K
IP	65

Dimensions Drawing

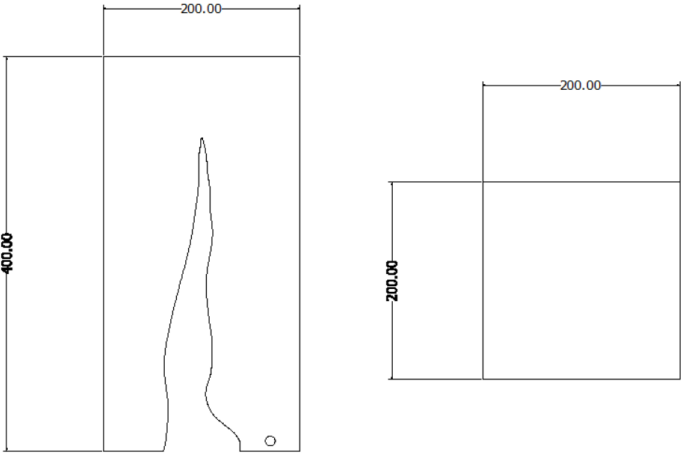

Application Case



BOLLARD LIGHT

나라장터 식별번호
25485915


ON-A043



SPECIFICATIONS

LED Power	3W
Dimensions	200 x 200 x 260mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

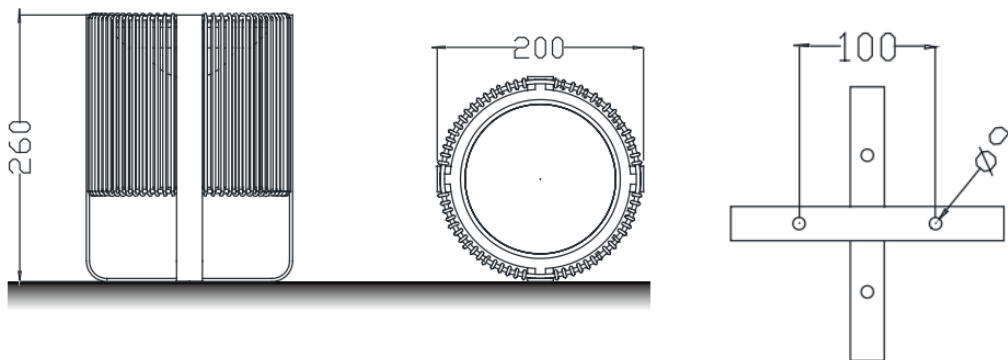

Application Case



BOLLARD LIGHT

나라장터 식별번호
24888516


ON-B010



SPECIFICATIONS

LED Power	6W
Dimensions	200 x 200 x 900mm
Beam Angle	120°
CT / Color mixing	3000-6500K
IP	65

Dimensions Drawing

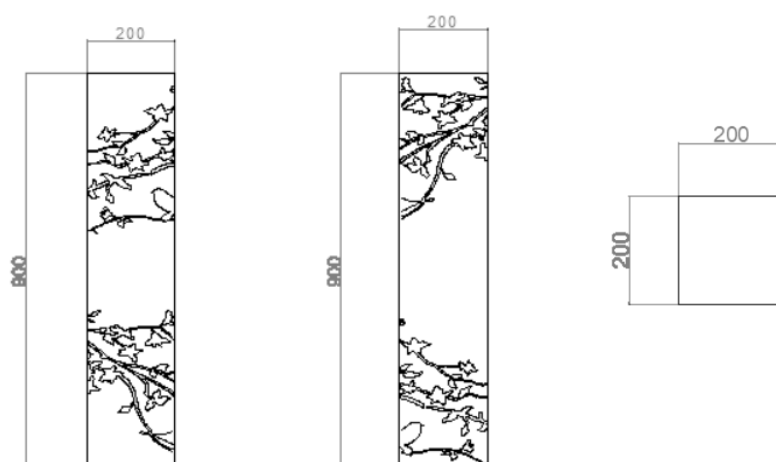

Application Case



BOLLARD LIGHT

나라장터 식별번호
24888515


ON-B009



SPECIFICATIONS

LED Power	6W
Dimensions	200 x 200 x 700mm
Beam Angle	120°
CT / Color mixing	3000-6500K
IP	65

Dimensions Drawing

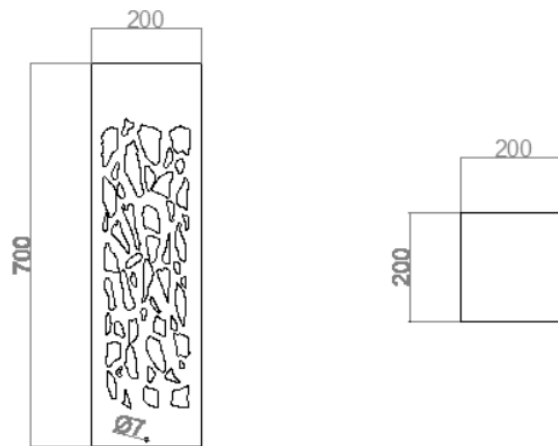

Application Case



BOLLARD LIGHT

나라장터 식별번호
24728174 / 24728173 / 24728175


ON-B002/ B002-1/ B002-2




SPECIFICATIONS

LED Power	9W
Dimensions	150 x 150 x 960 / 570/ 390 mm
CT / Color mixing	2700K, 3000K, 4000K , 6000K
Output (Lumen)	700lm
IP	65

Dimensions Drawing

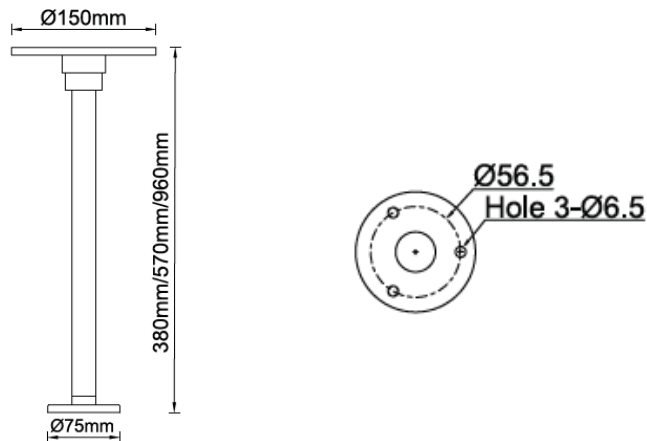


Application Case

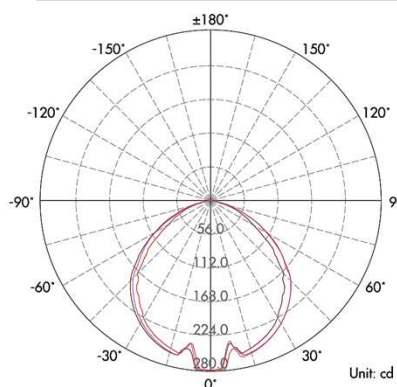

3.281ft 1.0m	25.856fc 279.31lx	9.185fc 98.871lx	8.349ft 2.545m
6.562ft 2.0m	6.464fc 69.578lx	2.296fc 24.718lx	16.698ft 5.089m
9.843ft 3.0m	2.873fc 30.924lx	1.021fc 10.986lx	25.047ft 7.634m
13.123ft 4.0m	1.616fc 17.395lx	0.574fc 6.179lx	33.396ft 10.179m
16.404ft 5.0m	1.014fc 11.133lx	0.367fc 3.955lx	41.744ft 12.724m

Unit: cd
 Height
 Center E
 Beam Angle: 103.7
 Average ED
 lumens

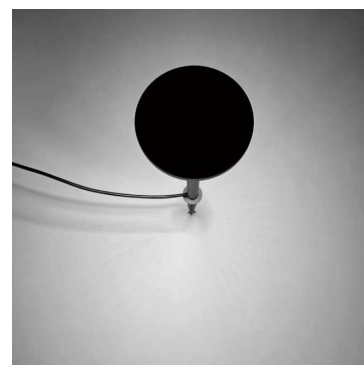

3000K,100°*

BOLLARD LIGHT

나라장터 식별번호
25480509 / 25480510


ON-A095 / A096




SPECIFICATIONS

LED Power	13W
Dimensions	190 x 190 x 610 / 1000 mm
CT / Color mixing	2700K, 3000K, 4000K , 5700K, 6500K
Beam Angle	360° / 180°
Output (Lumen)	800lm
IP	65

Dimensions Drawing

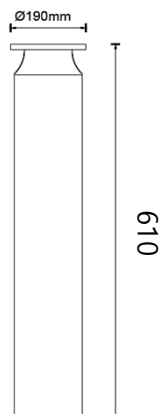

Application Case

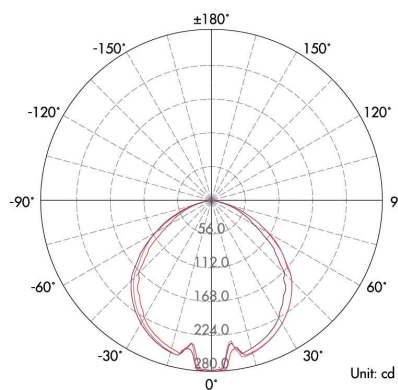

Height	Center E	Average E	Unit: cd
1.0m	278.31lx	98.871lx	2.545m
2.0m	69.578lx	24.718lx	5.089m
3.0m	30.924lx	10.986lx	7.634m
4.0m	17.395lx	6.179lx	10.179m
5.0m	11.133lx	3.955lx	12.724m



3000K,100°*

BOLLARD LIGHT

나라장터 식별번호
25480440


ON-A046

SPECIFICATIONS

LED Power	10W
Dimensions	150 x 150 x 600mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65



Dimensions Drawing

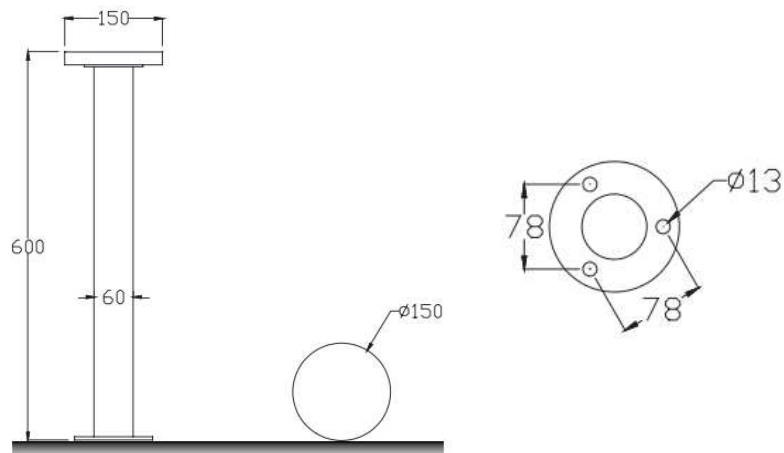

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480439


ON-A045



SPECIFICATIONS

LED Power	10W
Dimensions	120 x 120 x 500mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

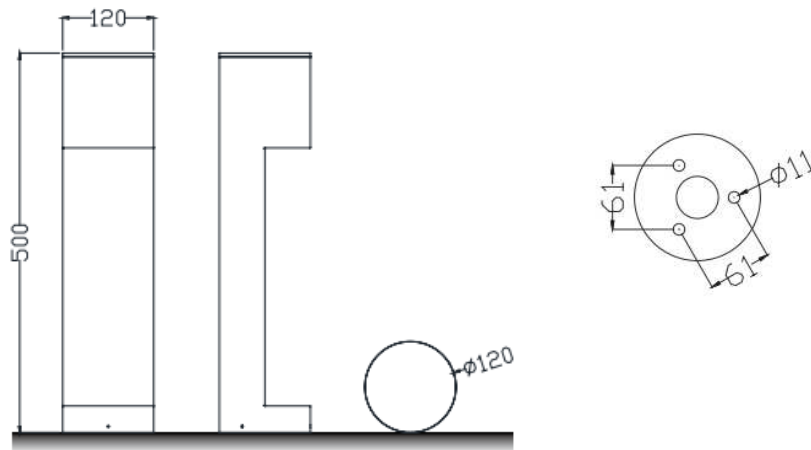


Application Case



BOLLARD LIGHT

나라장터 식별번호
25480438


ON-A044



SPECIFICATIONS

LED Power	10W
Dimensions	120 x 70 x 600mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

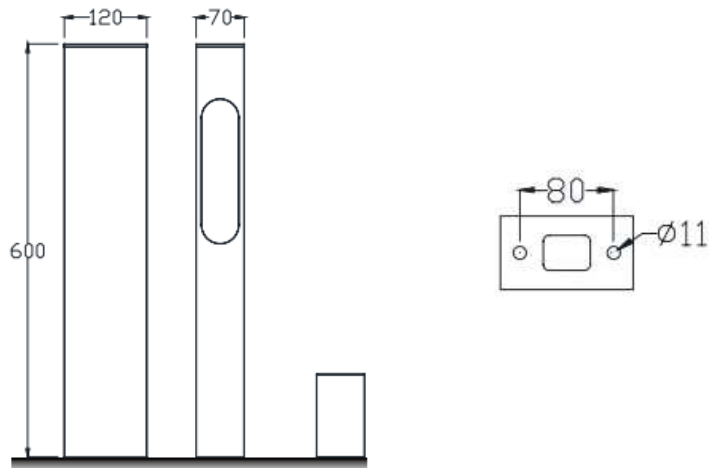

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480441


ON-A047



SPECIFICATIONS

LED Power	10W
Dimensions	200 x 200 x 621mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

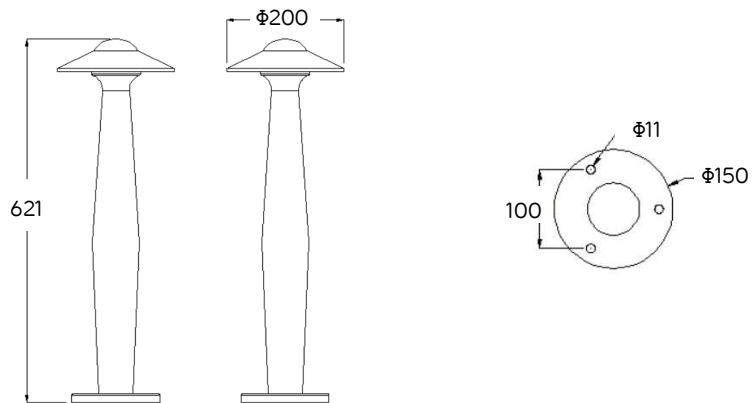

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480435


ON-A039

SPECIFICATIONS

LED Power	10W
Dimensions	200 x 200 x 625mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65



Dimensions Drawing

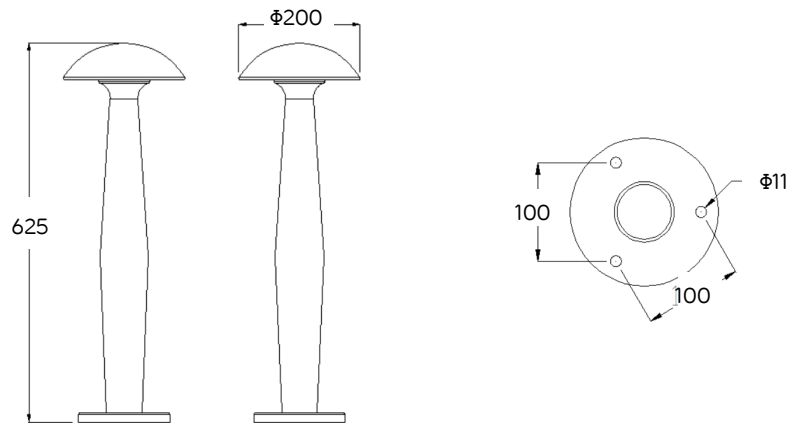

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480442


ON-A048




SPECIFICATIONS

LED Power	10W
Dimensions	200 x 79 x 180mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

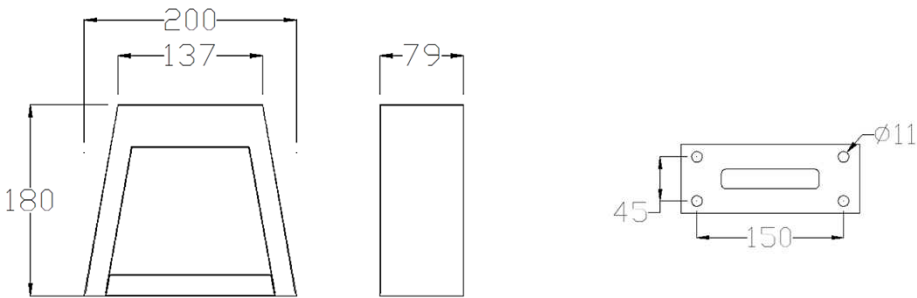

Application Case

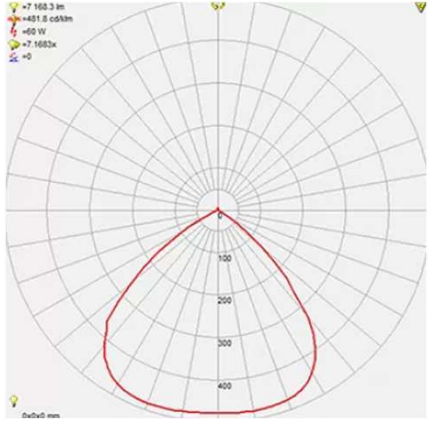

BOLLARD LIGHT

나라장터 식별번호
25480434


ON-A038




SPECIFICATIONS

LED Power	10W
Dimensions	245 x 245 x 250mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

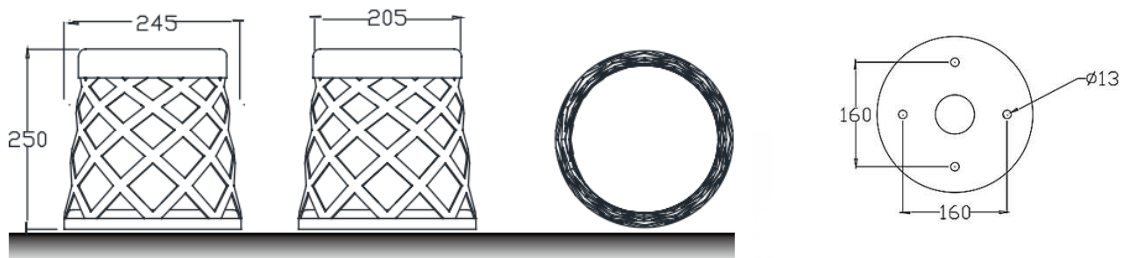

Application Case

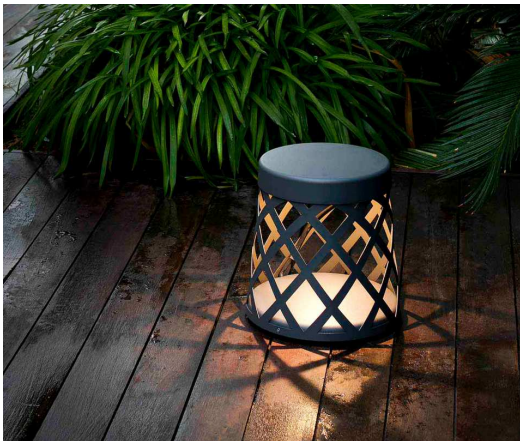

BOLLARD LIGHT

나라장터 식별번호
25480443


ON-A049



SPECIFICATIONS

LED Power	10W
Dimensions	200 x 200 x 480mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

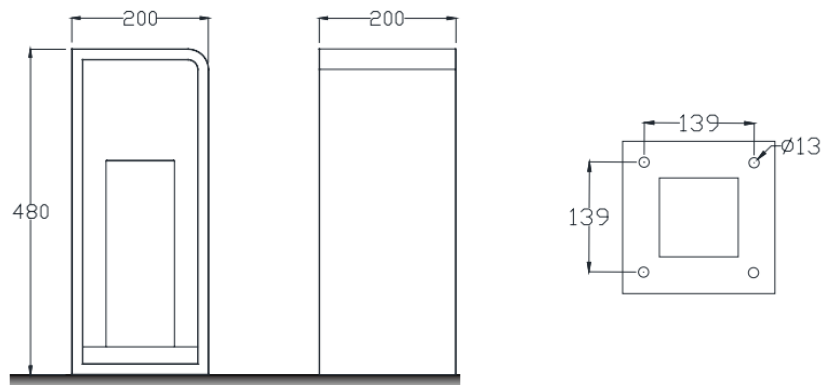

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480499


ON-A085





SPECIFICATIONS

LED Power	12W
Dimensions	60 x 60 x 600mm
CT / Color mixing	2700K, 3000K , 4000K, 5700K 6500K
Output (Lumen)	230lm(one side) / 350 lm(two side)
Beam Angle	360° / 180°
IP	65

Dimensions Drawing

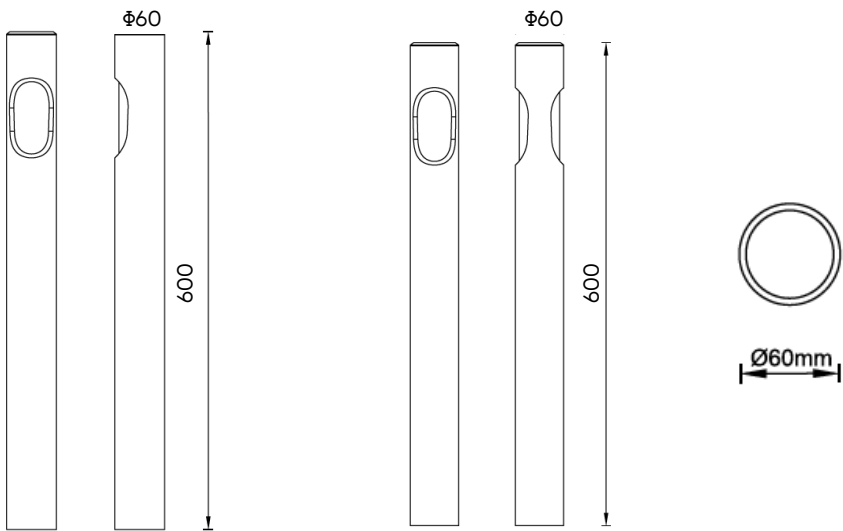

Application Case

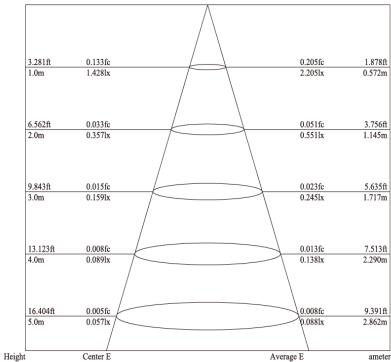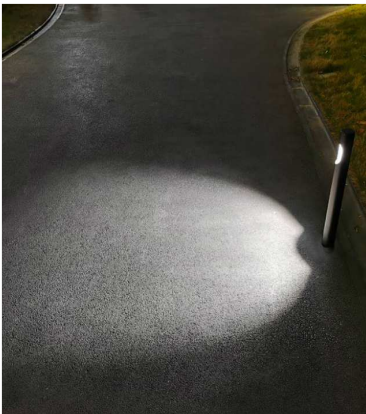

3000K, 60°* 60°*

BOLLARD LIGHT

나라장터 식별번호
25480436


ON-A040



SPECIFICATIONS

LED Power	12W
Dimensions	150 x 150 x 900mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

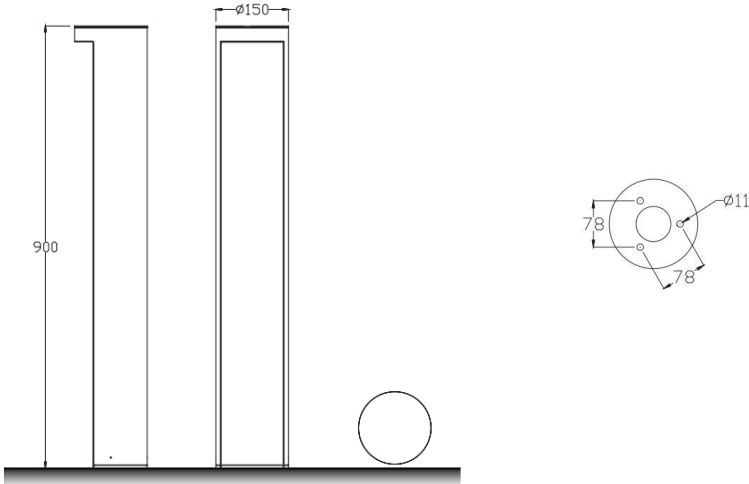

Application Case



BOLLARD LIGHT

나라장터 식별번호
24736744


ON-P019

SPECIFICATIONS


LED Power	15W
Dimensions	120 x 120 x 1200 mm
CT / Color mixing	2700K, 3000K, 4000K , 6000K
Beam Angle	70°
Output (Lumen)	1000lm
IP	65





Dimensions Drawing

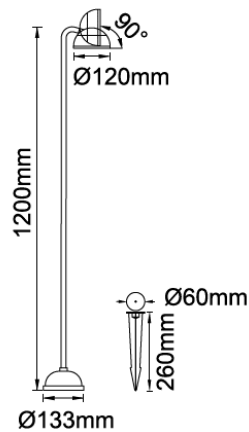

Filters light effect

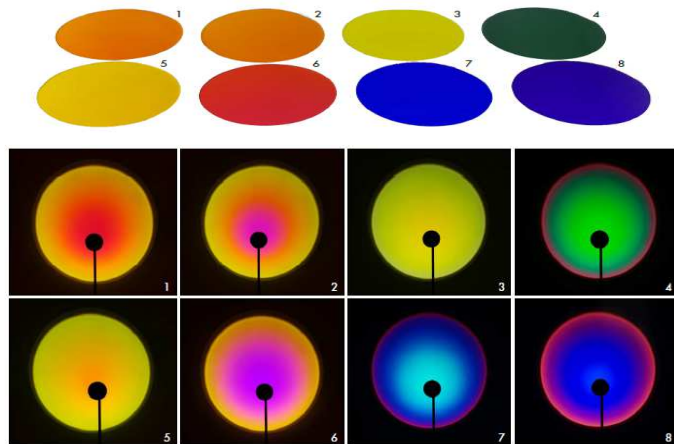

Application Case

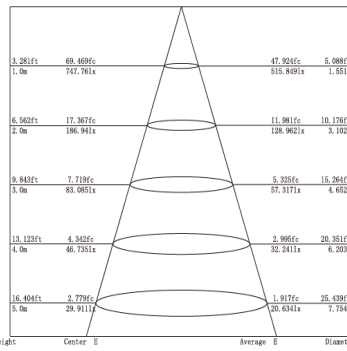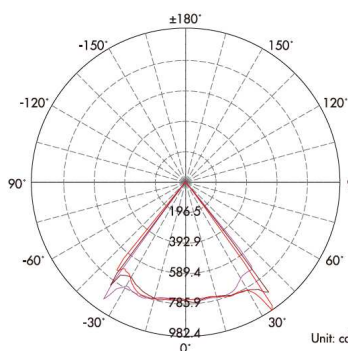

3000K,70°*

POLE LIGHT

나라장터 식별번호
25492019


ON-A125

SPECIFICATIONS

LED Power	20W
Dimensions	220 x 220 x 3950mm
CT / Color mixing	3000K, 4000K, 6000K
Material	강철
IP	54



Dimensions Drawing

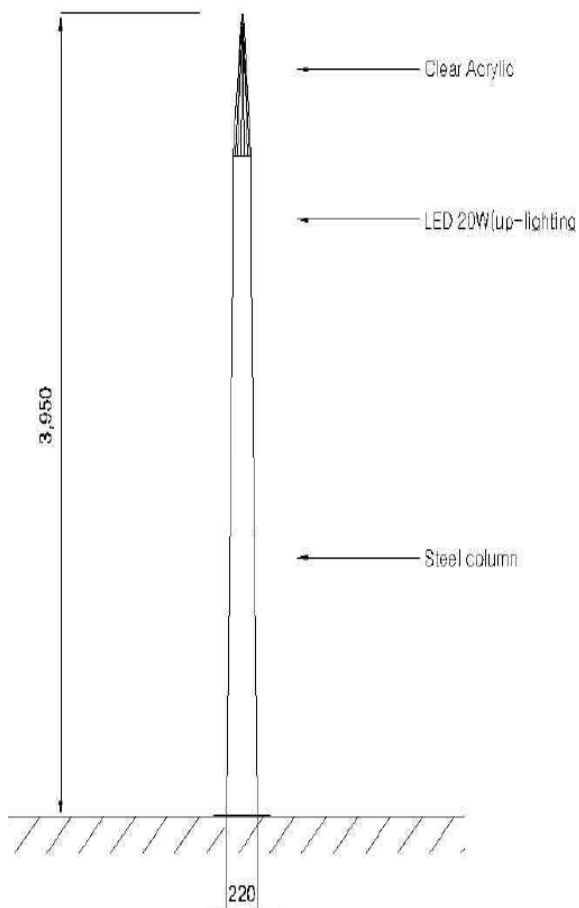

Application Case




POLE LIGHT

나라장터 식별번호
25480431


ON-A035

SPECIFICATIONS



LED Power	30W
Dimensions	400 x 180 x 4500mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K,
Output (Lumen)	3300 lm
Material	알루미늄
IP	65

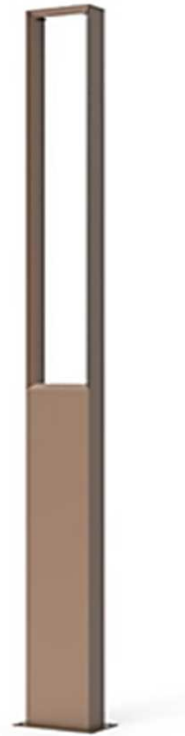

Dimensions Drawing

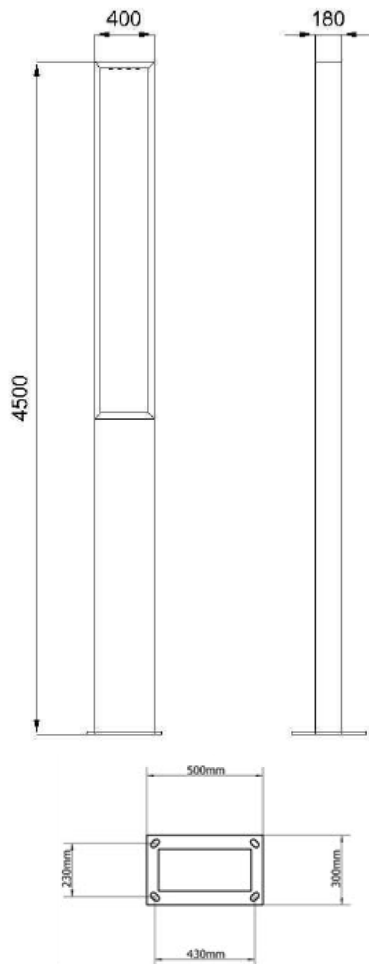

Photometric Data

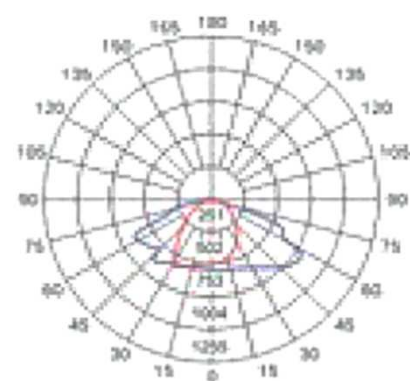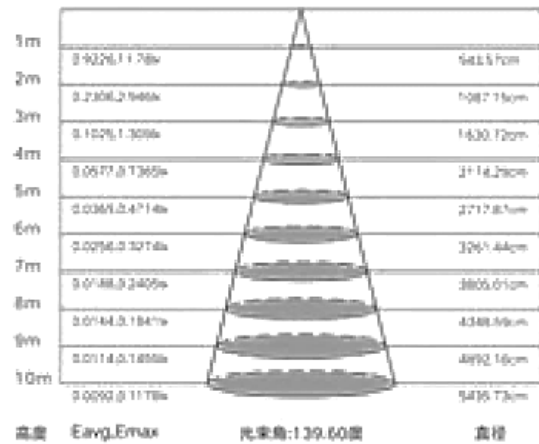

POLE LIGHT

나라장터 식별번호
25480432


ON-A036

SPECIFICATIONS


LED Power	40W
Dimensions	140 x 140 x 3950mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Output (Lumen)	4400 lm
Material	알루미늄
IP	65



Dimensions Drawing

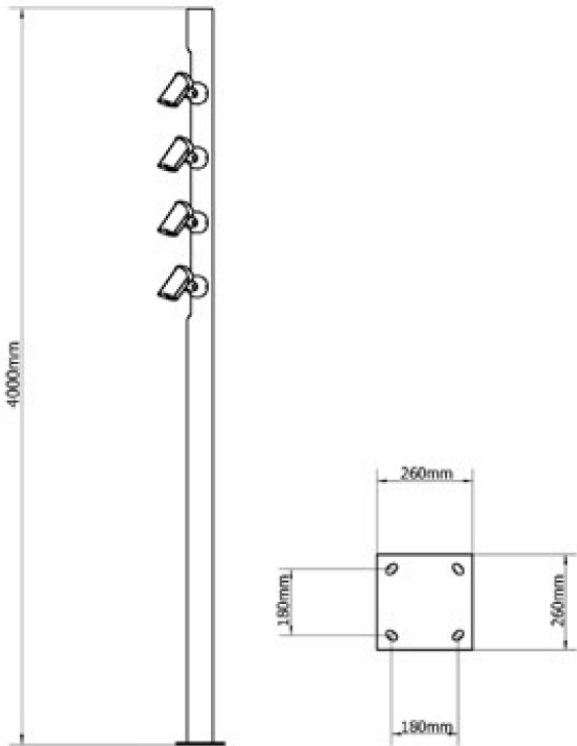

Photometric Data

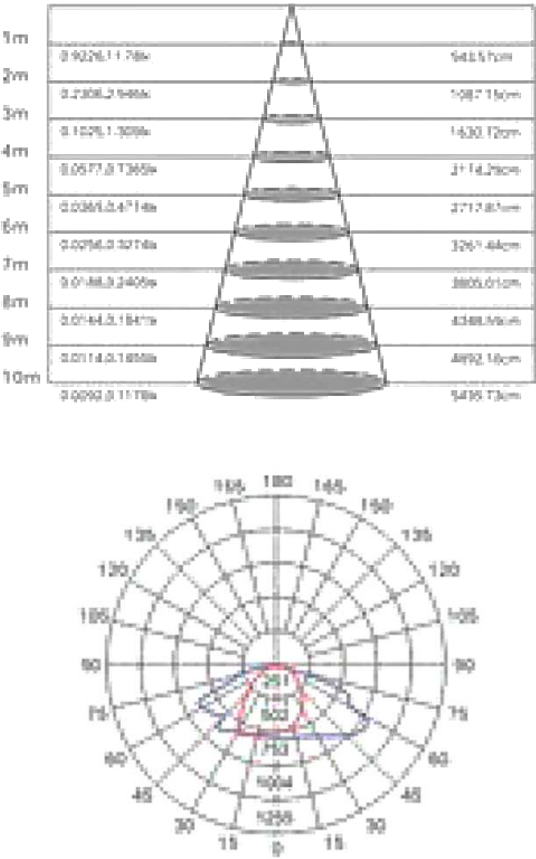

POLE LIGHT

나라장터 식별번호
24753609


ON-S011

SPECIFICATIONS

LED Power	40W
Dimensions	300 x 300 x 3900mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

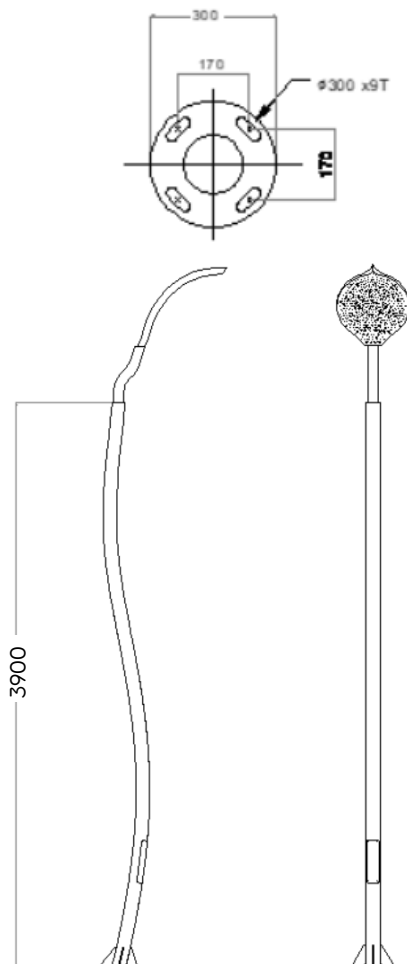

Application Case



POLE LIGHT

나라장터 식별번호
25480433


ON-A037

SPECIFICATIONS


LED Power	50W
Dimensions	510 x 510 x 3500mm
Beam Angle	120°
CT / Color mixing	2800-6500K,
Output (Lumen)	6351 lm
Material	알루미늄
IP	65



Dimensions Drawing

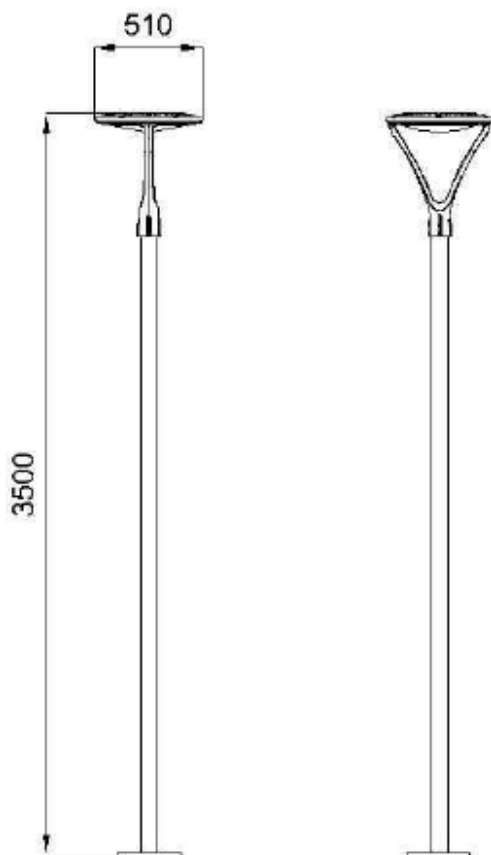

Photometric Data

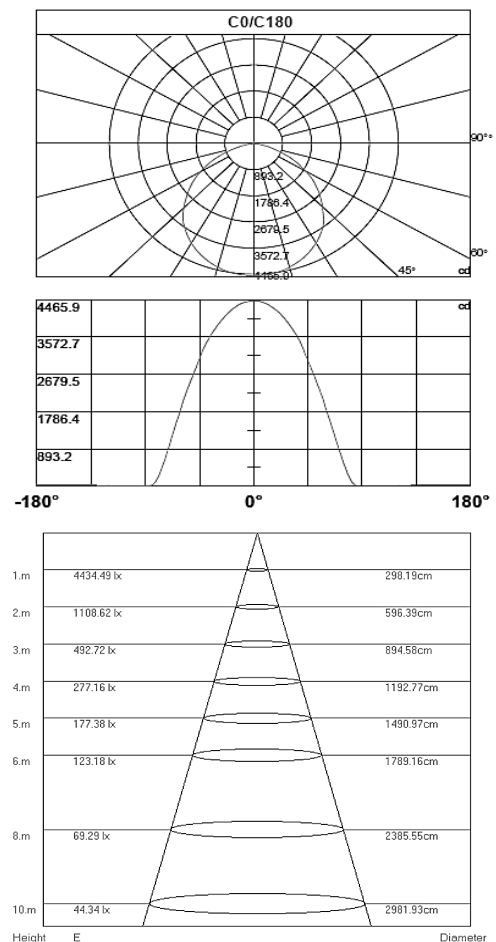

POLE LIGHT

나라장터 식별번호
24728146


ON-S007

SPECIFICATIONS

LED Power	50W
Dimensions	2000 x 2000 x 4000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

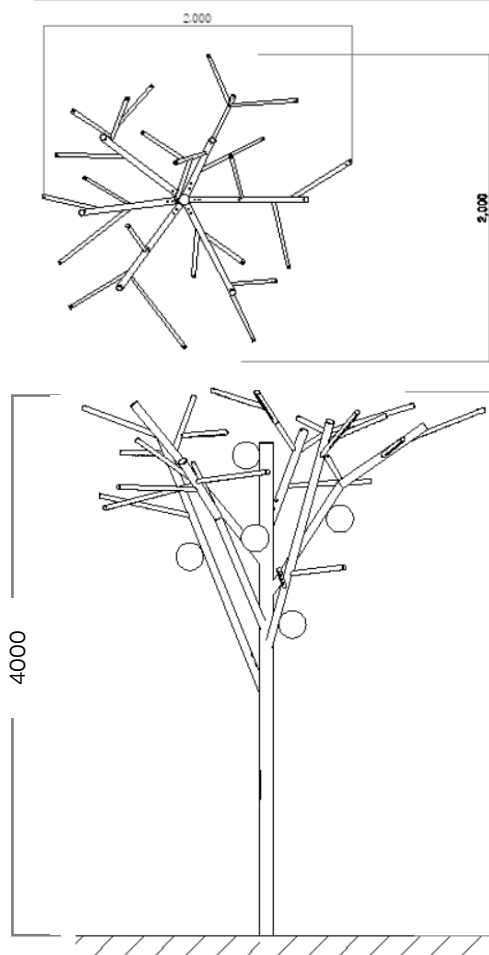

Application Case



POLE LIGHT

나라장터 식별번호
25700272


ON-A155

SPECIFICATIONS

LED Power	50W
Dimensions	1350 x 475 x 3900mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	알루미늄
IP	65



Dimensions Drawing

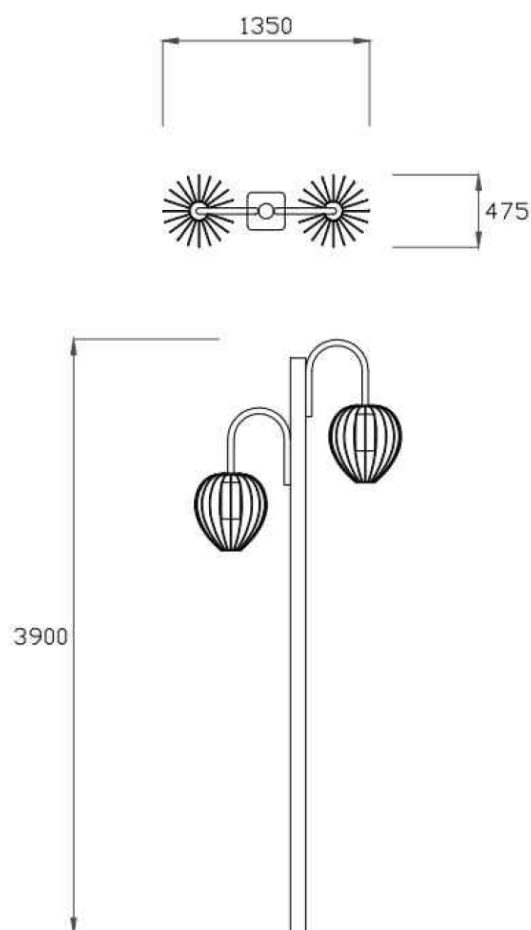

Application Case



POLE LIGHT

나라장터 식별번호
24725824


ON-S002

SPECIFICATIONS

LED Power	50W
Dimensions	400 x 400 x 3950mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

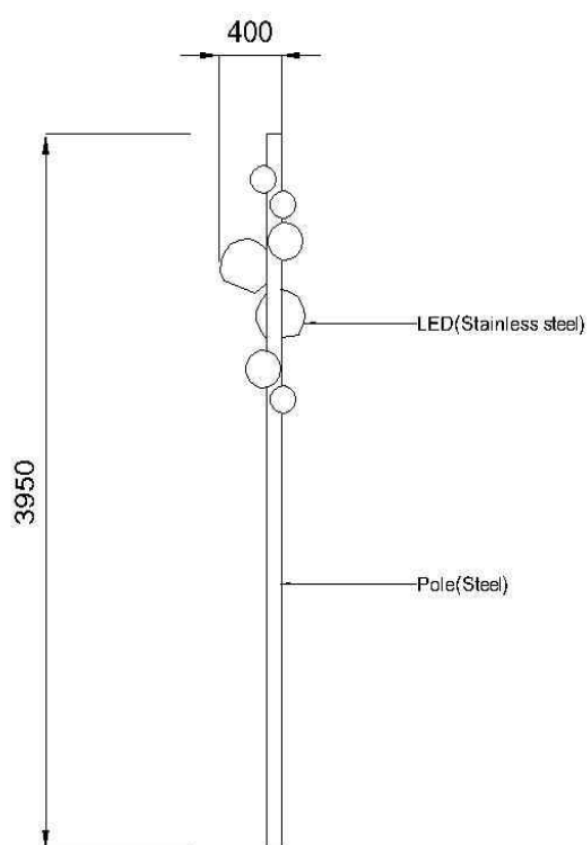

Application Case



POLE LIGHT

나라장터 식별번호
25485916


ON-A060

SPECIFICATIONS


LED Power	60W
Dimensions	688 x 42 x 3950mm
Beam Angle	120°
CT / Color mixing	2800-6500K
Output (Lumen)	6351 lm
Material	알루미늄
IP	65



Dimensions Drawing

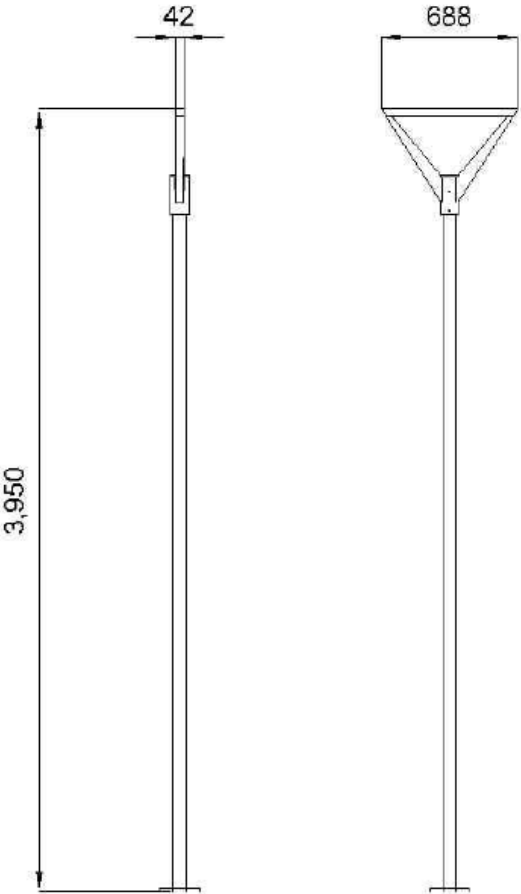

Photometric Data

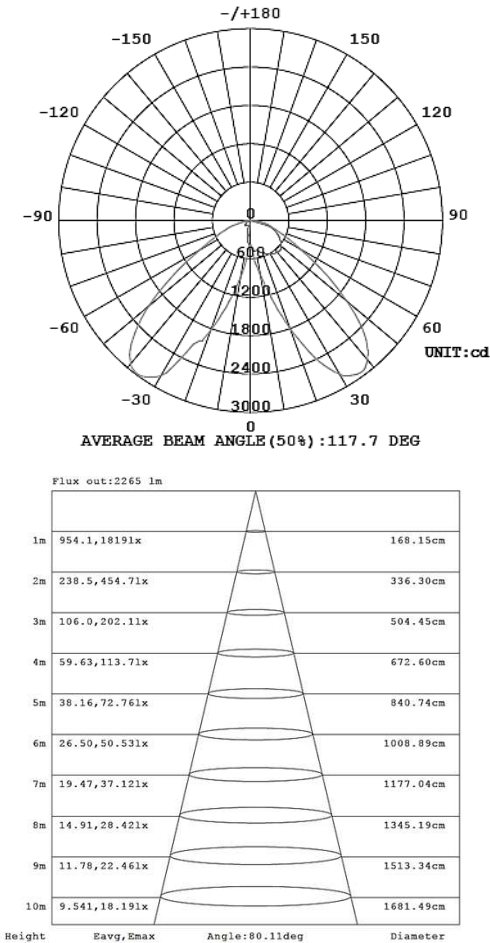

POLE LIGHT

나라장터 식별번호
25480430


ON-A034

SPECIFICATIONS



LED Power	60W
Dimensions	200 x 200 x 3500mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Output (Lumen)	6600 lm
Material	알루미늄
IP	65



Dimensions Drawing

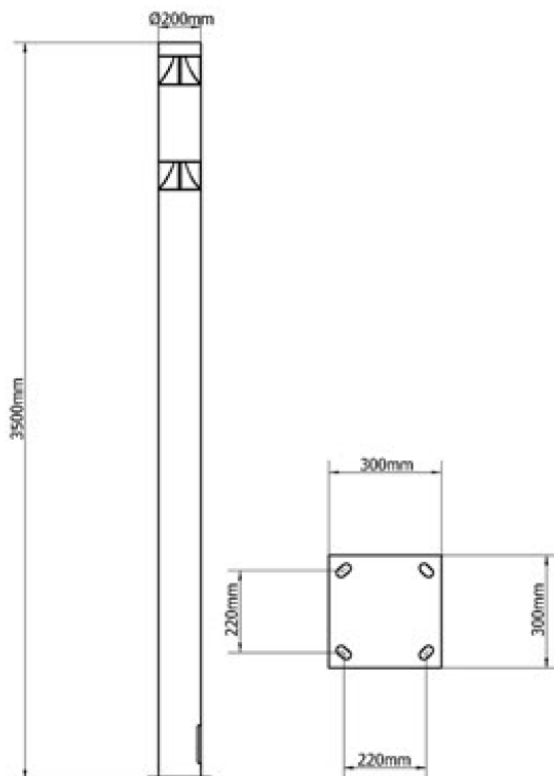

Photometric Data

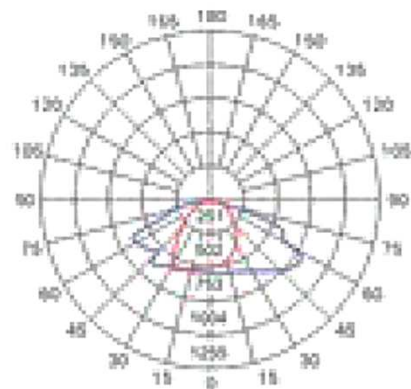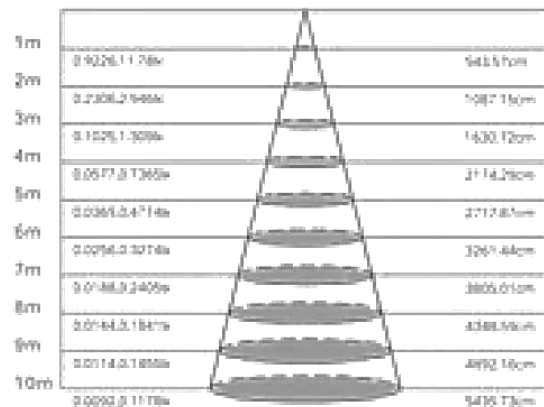

POLE LIGHT

나라장터 식별번호
25700270


ON-A157

SPECIFICATIONS


LED Power	60W
Dimensions	600 x 600 x 3000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K, RGB
Material	알루미늄
IP	65



Dimensions Drawing

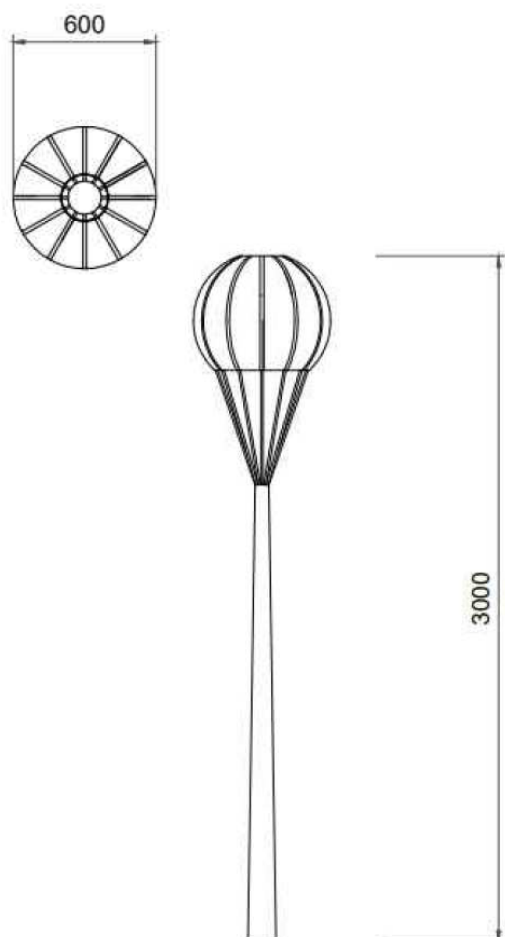

Application Case

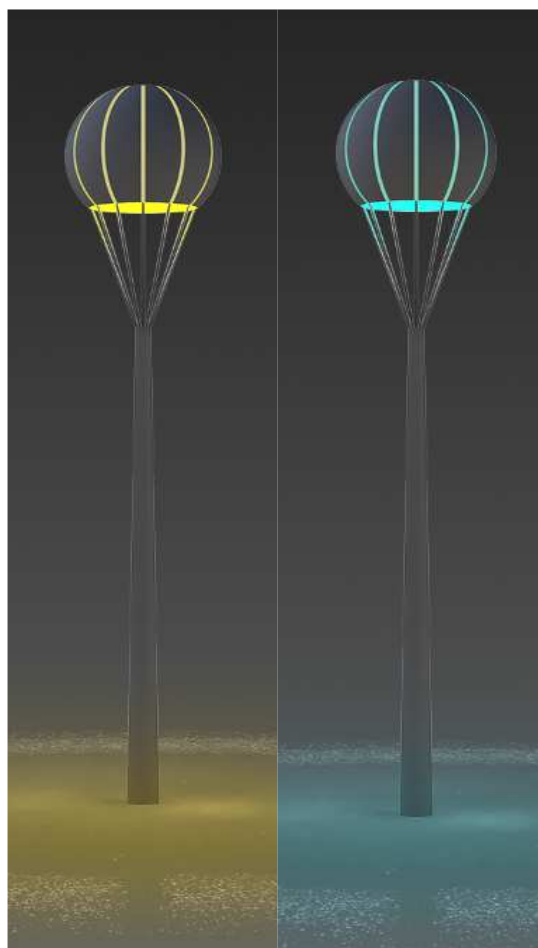


POLE LIGHT

나라장터 식별번호
25700269


ON-A156

SPECIFICATIONS

LED Power	60W
Dimensions	600 x 600 x 2800mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K, RGB
Material	알루미늄
IP	65

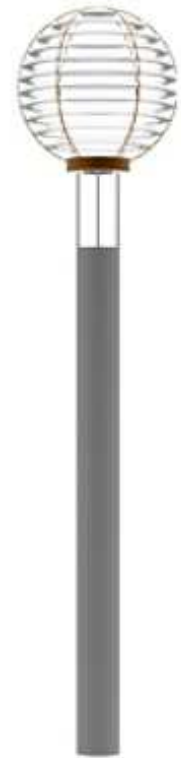

Dimensions Drawing

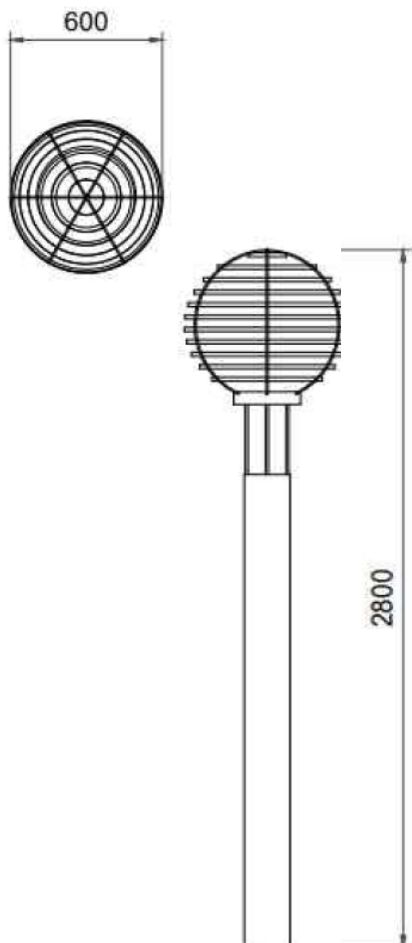

Application Case



POLE LIGHT

나라장터 식별번호
25485917


ON-A061

SPECIFICATIONS


LED Power	80W
Dimensions	400 x 400 x 3950mm
Beam Angle	120°
CT / Color mixing	2800-6500K,
Output (Lumen)	10400 lm
Material	알루미늄
IP	65



Dimensions Drawing

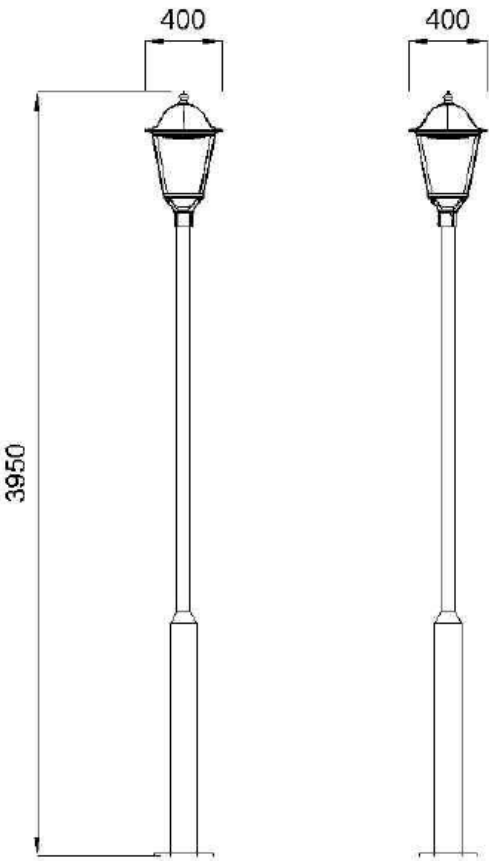

Photometric Data

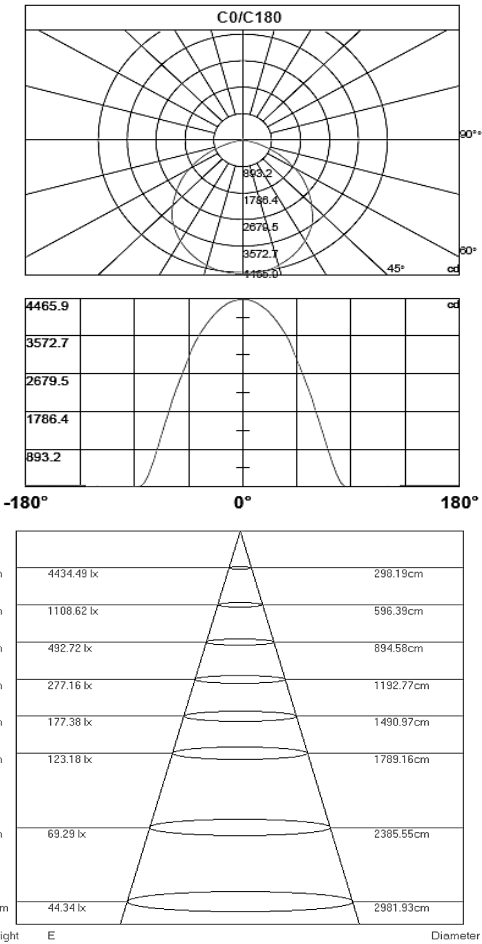

POLE LIGHT

나라장터 식별번호
24736746 / 24736745


ON-S017 / S017-1

SPECIFICATIONS

LED Power	29W / 80W
Dimensions	600 x 600 x 2000mm / 1000 x 1000 x 3000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K, RGB
Material	Stainledd steel + PC



Dimensions Drawing

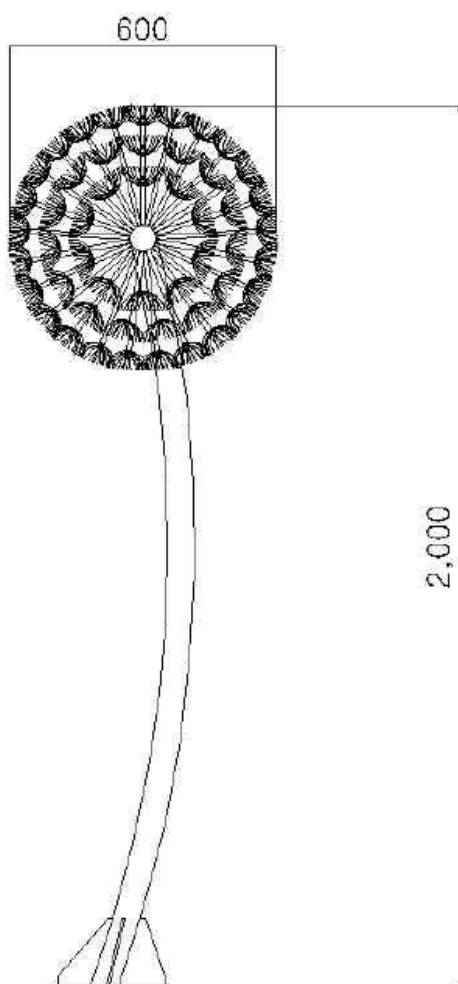

Application Case



POLE LIGHT

나라장터 식별번호
24753304 / 24753612


ON-S010 / S013-1

SPECIFICATIONS

LED Power	46W / 88W
Dimensions	300 x 300 x 3900mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

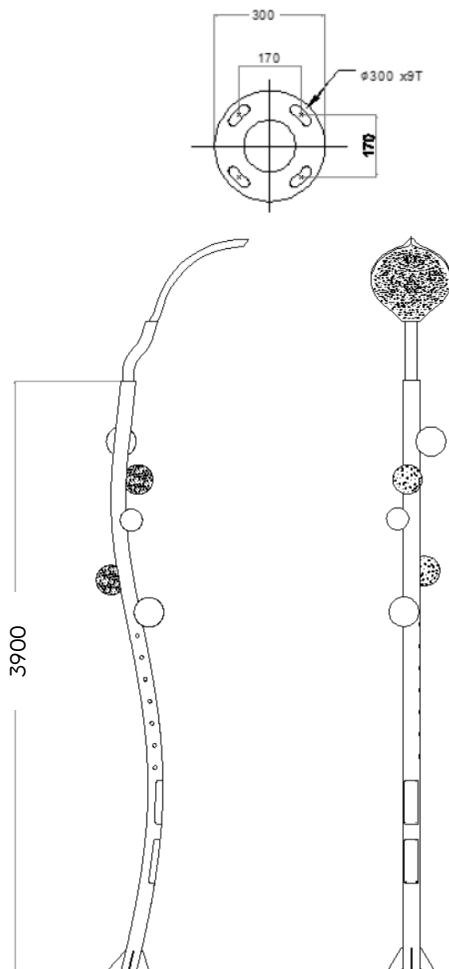

Application Case



POLE LIGHT

나라장터 식별번호
25485923


ON-A124

SPECIFICATIONS

LED Power	90W
Dimensions	1200 x 1200 x 3950mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	강철
IP	54



Dimensions Drawing

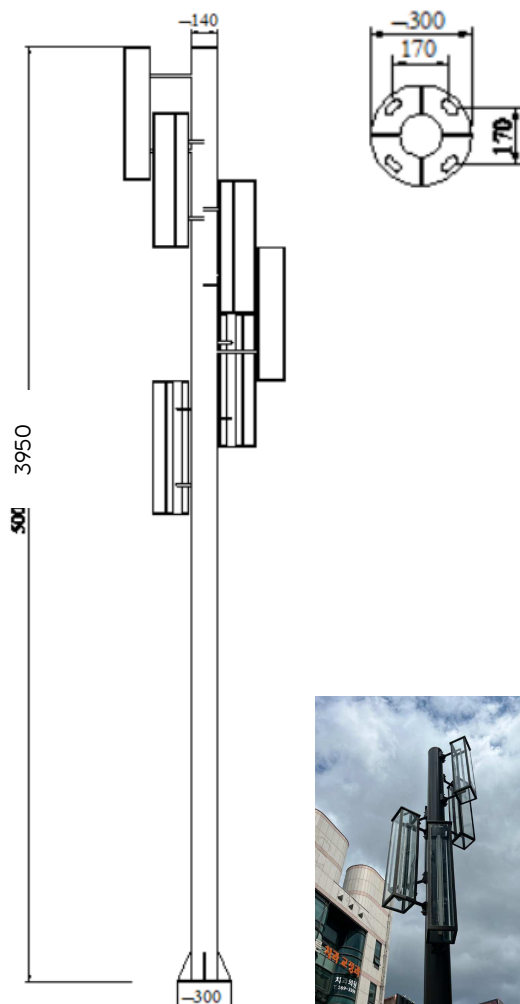

Application Case



POLE LIGHT

나라장터 식별번호
24753301 / 24753303


ON-S012 / S013

SPECIFICATIONS

LED Power	99W / (25x3 + 3x8)w
Dimensions	300 x 300 x 3900mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

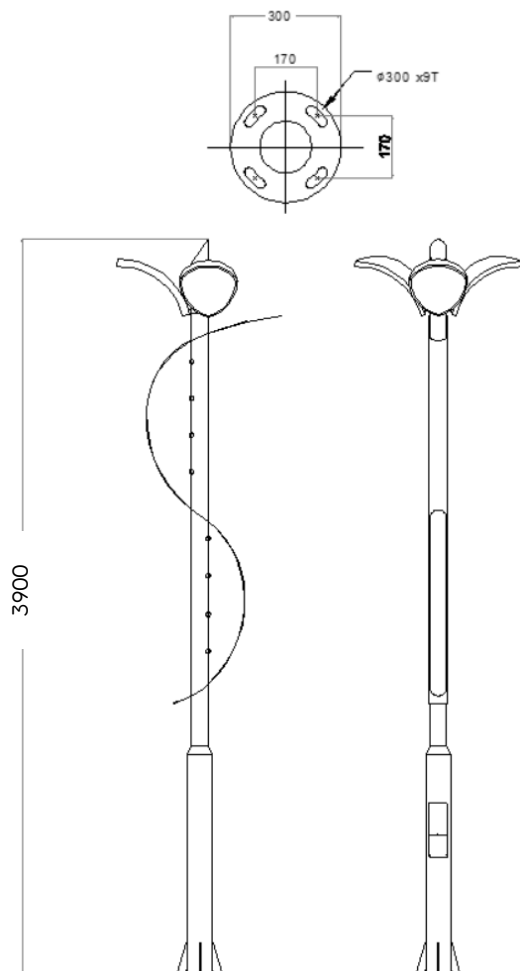

Application Case



POLE LIGHT

나라장터 식별번호
25700271


ON-A158

SPECIFICATIONS

LED Power	100W
Dimensions	700 x 700 x 3000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K, RGB
Material	알루미늄
IP	65



Dimensions Drawing

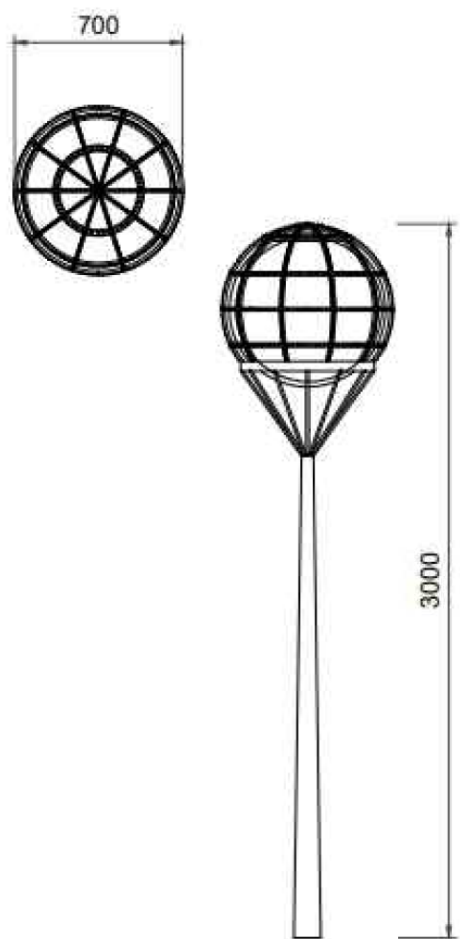

Application Case



POLE LIGHT

나라장터 식별번호
25700396


ON-A151

SPECIFICATIONS


LED Power	106W (30+30+46w)
Dimensions	1300 x 150 x 4500mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	스테인리스강
IP	65



Dimensions Drawing

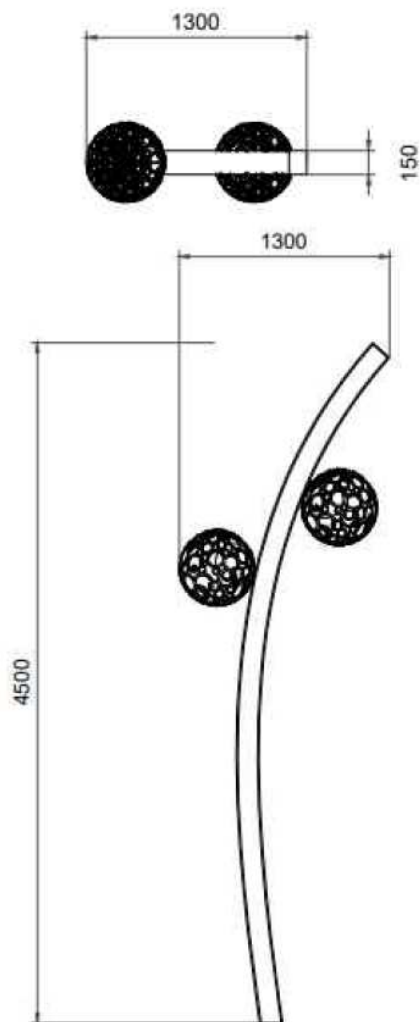

Application Case

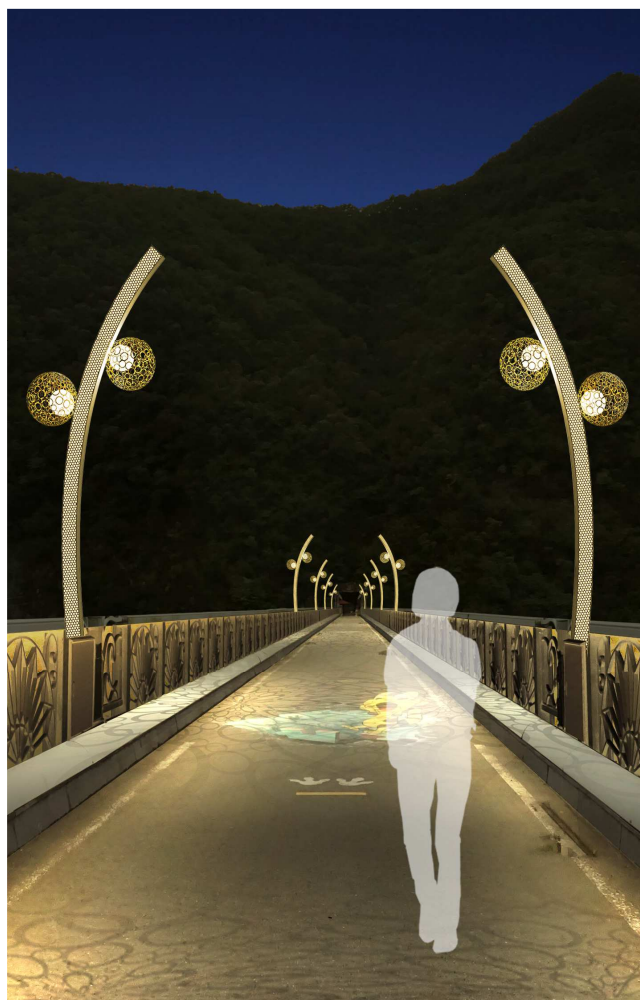

POLE LIGHT

나라장터 식별번호
24719742


ON-S001

SPECIFICATIONS


LED Power	210W
Dimensions	2000 x 2000 x 4000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K, RGB
Material	스테인리스강
IP	65



Dimensions Drawing

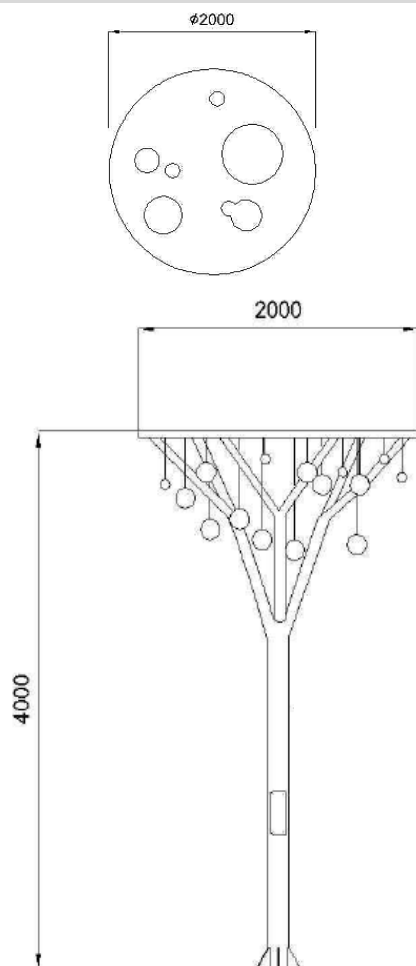

Application Case

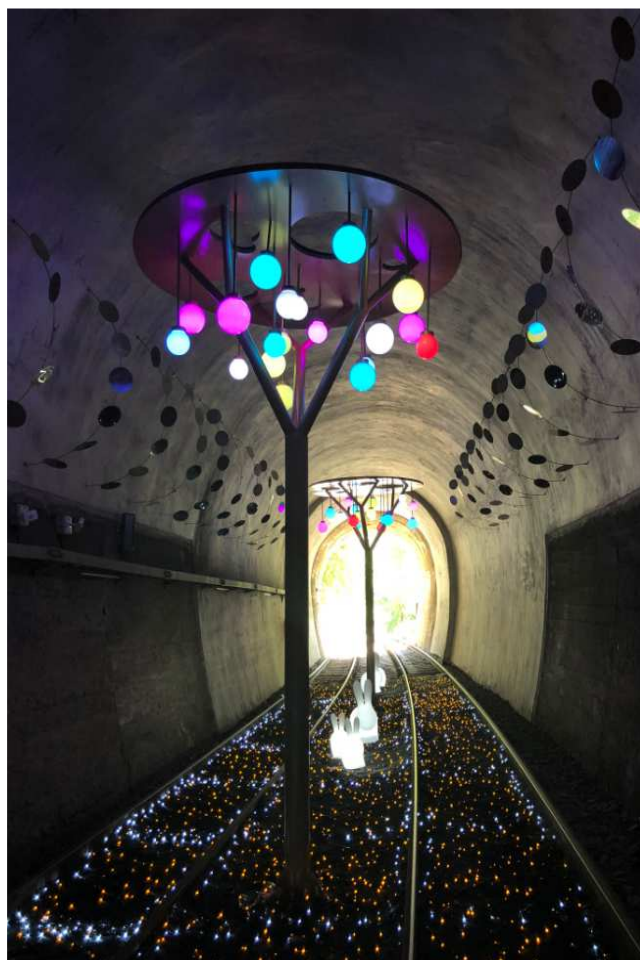


POLE LIGHT

나라장터 식별번호
25492021


ON-A059

SPECIFICATIONS

LED Power	225W
Dimensions	350 x 350 x 4000mm
Beam Angle	120°
CT / Color mixing	3000K, 4000K, 6000K
Material	콘크리트 + LED
IP	65



Dimensions Drawing

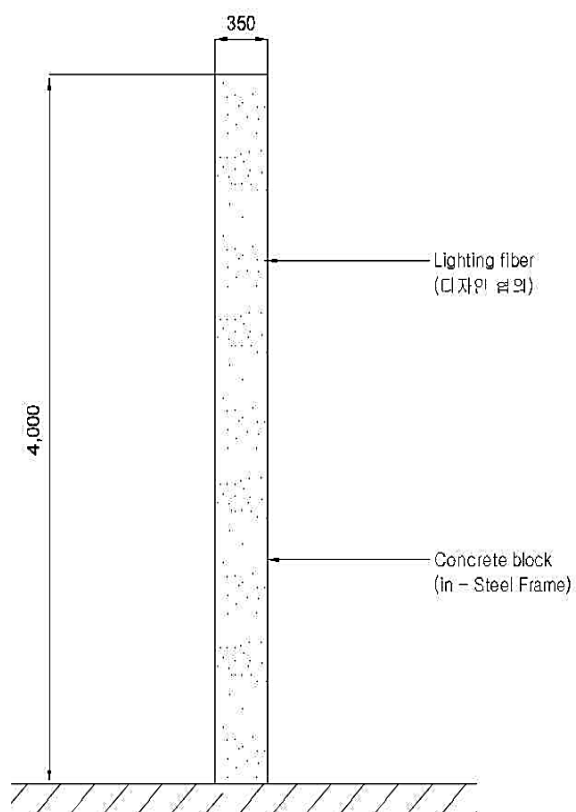

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480527


ON-A114



SPECIFICATIONS

Type	Hollow transparent ball
LED Power	0.2W (3000K,6000K, R.G.B)
Dimensions	Φ60 x 600mm / 700mm / 800mm
Material	PC + Steel
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

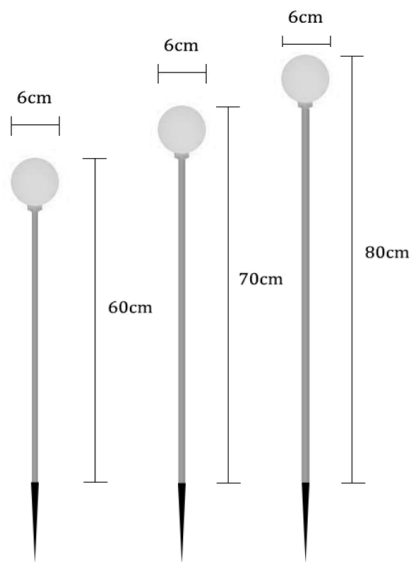

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25493671


ON-A067




SPECIFICATIONS

Type	Bulrush light
LED Power	0.5W (3000K,6000K, R.G.B)
Dimensions	Φ15 x 393mm / 793mm / 1093mm
Material	Aluminum + PMMA
Color	3000K, 4000K, 5700K
IP	65

Dimensions Drawing

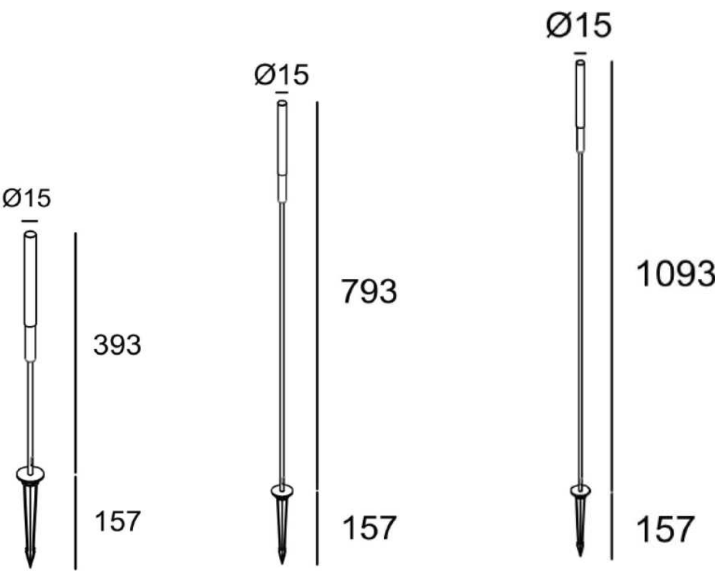

Application Case

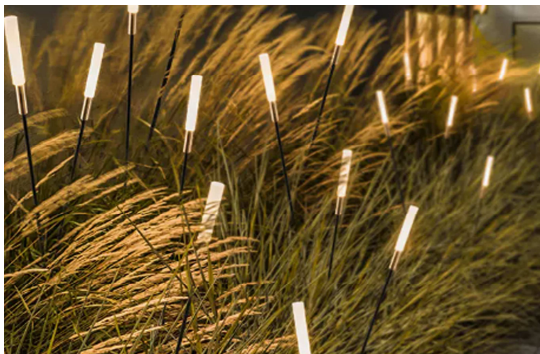

DECORATIVE LIGHT

나라장터 식별번호
25493670


ON-A066



SPECIFICATIONS

Type	Dandelion ball
LED Power	0.5W (3000K,6000K)
Dimensions	Φ107 x 343 / 543 / 743 / 943 mm
Material	Aluminum + PMMA
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

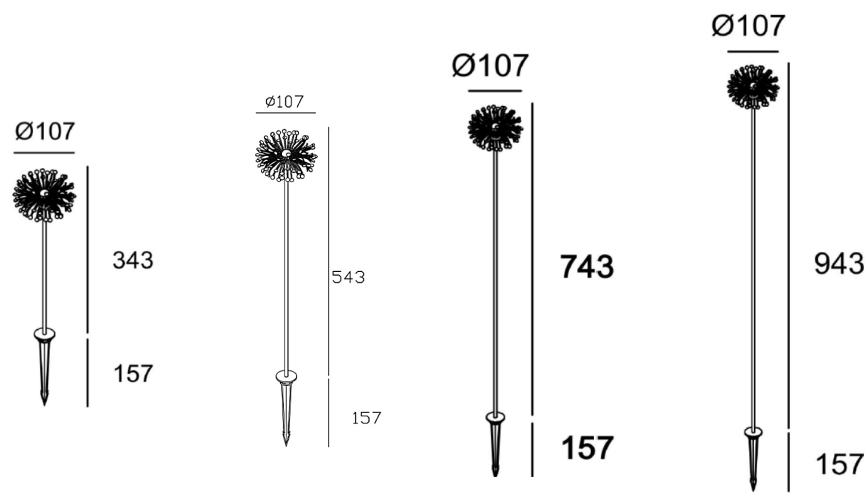

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480557


ON-A123





SPECIFICATIONS

Type	Solid transparent ball
LED Power	0.8W (3000K,6000K, R.G.B)
Dimensions	Φ40 / Φ60 x 600mm / 700mm / 800mm
Material	PC + Steel
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

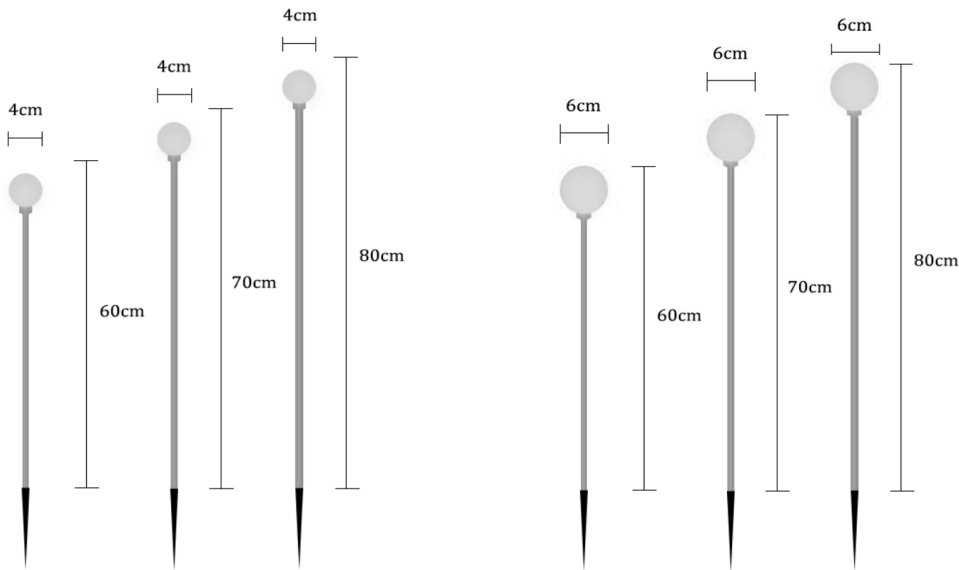

Application Case

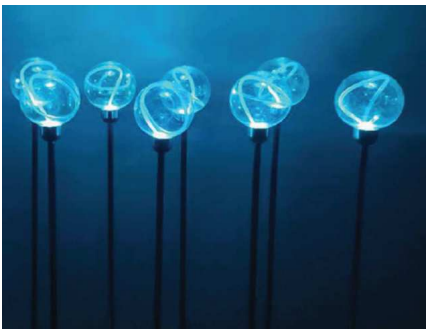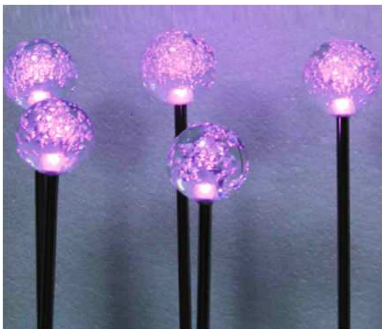

DECORATIVE LIGHT

나라장터 식별번호
25480534


ON-A122



SPECIFICATIONS

Type	Smooth ball / Frosted ball
LED Power	1W (3000K,6000K) / 0.3W (R.G.B)
Dimensions	Φ40 / Φ60 x 600mm / 700mm / 800mm (Frosted Φ60 only)
Material	PMMA + Steel / PC + Steel
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

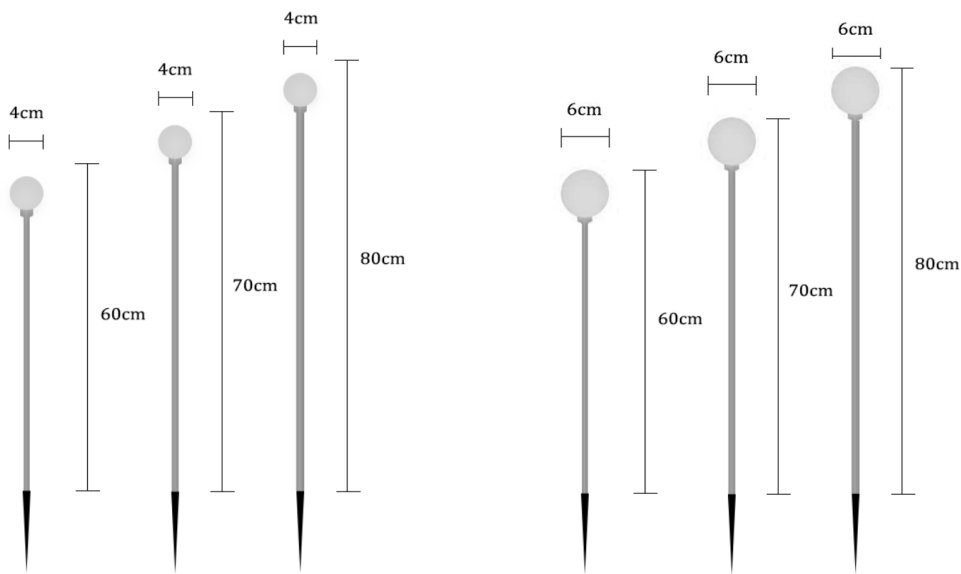

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480528


ON-A113



SPECIFICATIONS

Type	Dandelion ball
LED Power	1W (3000K,6000K, R.G.B)
Dimensions	Φ100 / Φ150 / Φ200x 600mm
Material	Aluminum + Steel
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

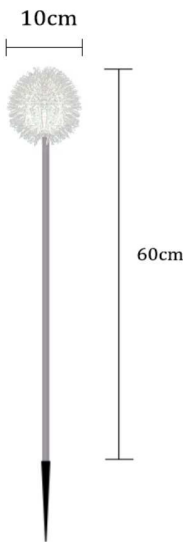

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24719703


ON-P002



SPECIFICATIONS

Type	Flower light
LED Power	1W
Dimensions	100 x 100 x 700mm
Material	PVC
Color	3000K, 5700K, RGB
IP	65

Dimensions Drawing

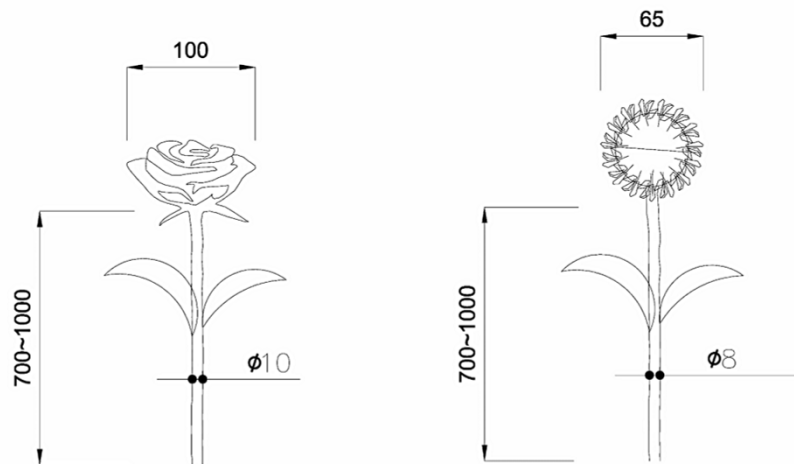

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25485924 / 25485925


ON-A062 / A063




SPECIFICATIONS

Type	Daffodils ball
LED Power	1.8W (3000K,6000K)
Dimensions	Φ58 x 230 mm / Φ58 x 250 mm
Material	Aluminum + PMMA
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

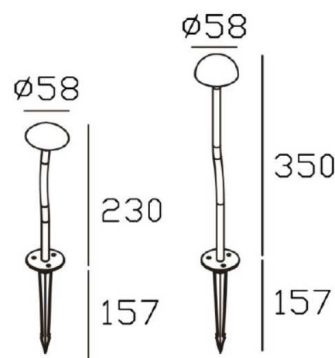

Application Case

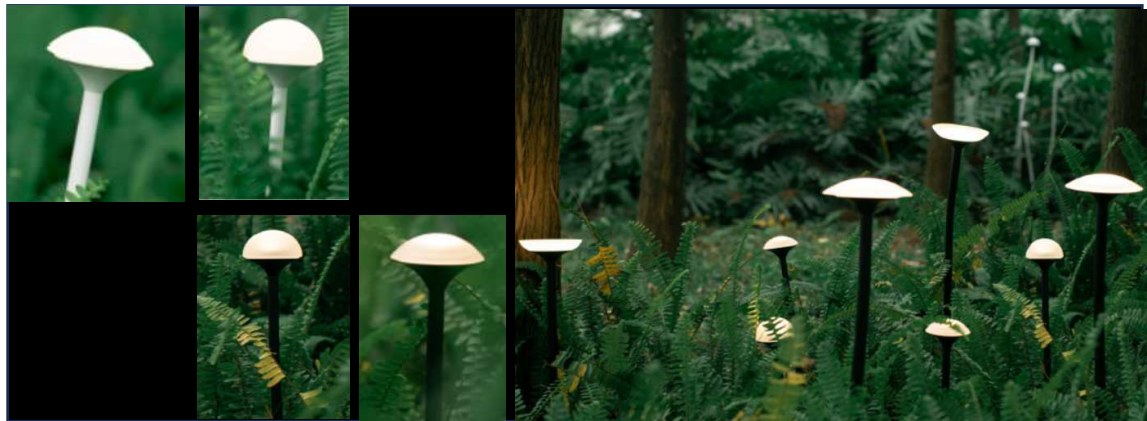

DECORATIVE LIGHT

나라장터 식별번호
25677663


ON-A153




SPECIFICATIONS

LED Power	3W
Dimensions	60 x 60 x 600 mm
Beam Angle	75°
CT / Color mixing	2700K, 3000K, 4000K, 5700K, 6500K
Output (Lumen)	90 lm
IP	65

Dimensions Drawing



Photometric Data

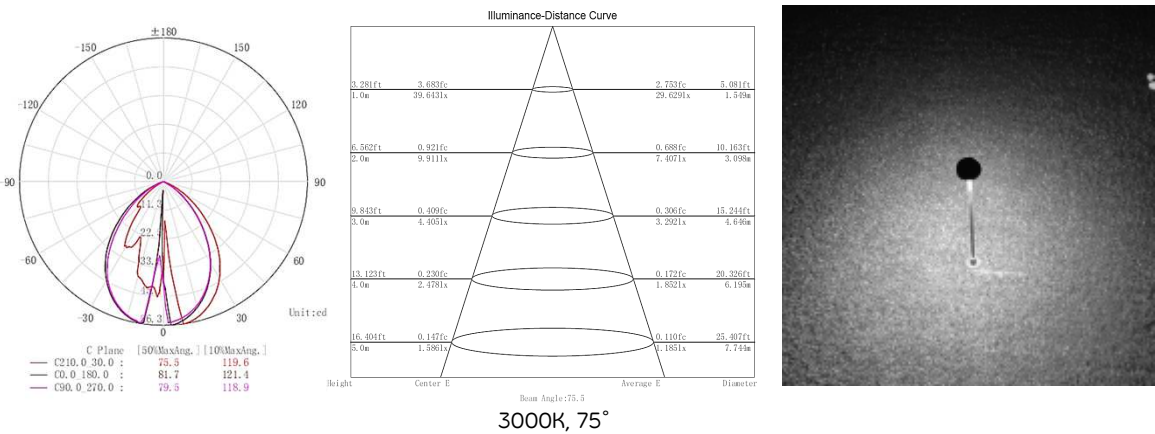


3000K, 75°

DECORATIVE LIGHT

나라장터 식별번호
25677660


ON-A149



SPECIFICATIONS

LED Power	3W
Dimensions	Φ250
Material	PE
Color	3000K, 6000K, RGB
IP	54

Dimensions Drawing

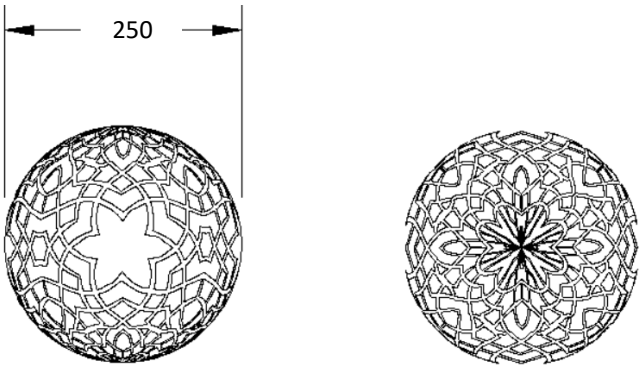

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25677659


ON-A148



SPECIFICATIONS

LED Power	3W
Dimensions	150 x 150 x 250mm
Material	PE
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

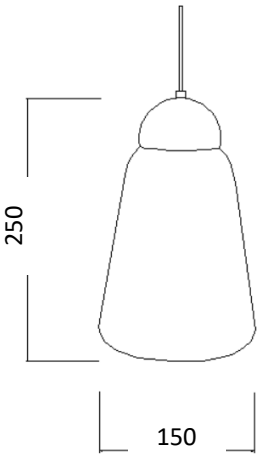

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24888514


ON-B008



SPECIFICATIONS

LED Power	3W
Dimensions	300 x 300 x 300mm
Beam Angle	120°
CT / Color mixing	3000-6500K
Weight	8 KG
IP	65

Dimensions Drawing

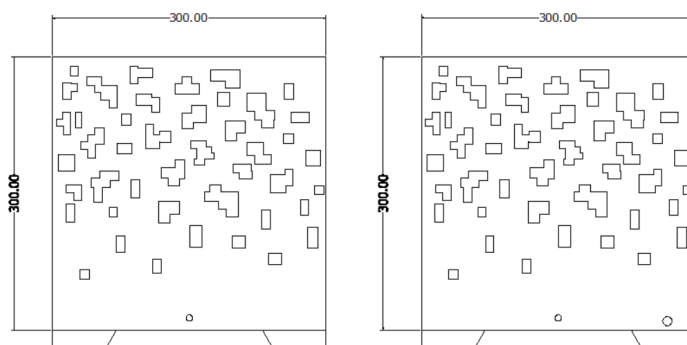

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24728178


ON-S019



SPECIFICATIONS

LED Power	3W
Dimensions	390 x 270 x 220
Material	RESIN
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

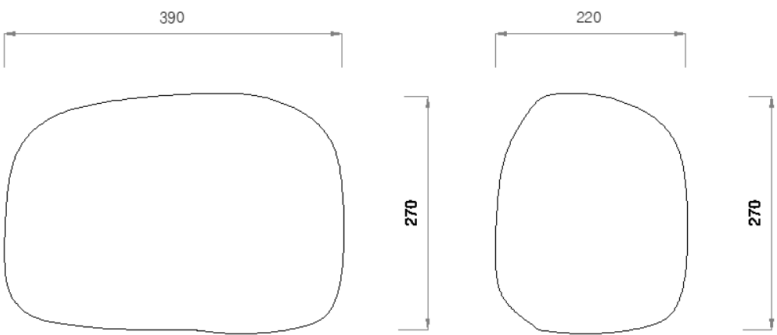

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24769798


ON-B006



SPECIFICATIONS

LED Power	3W
Dimensions	310 x 310 x 410
Material	RESIN
Color	3000K, 4000K, 6000K
IP	65

Dimensions Drawing

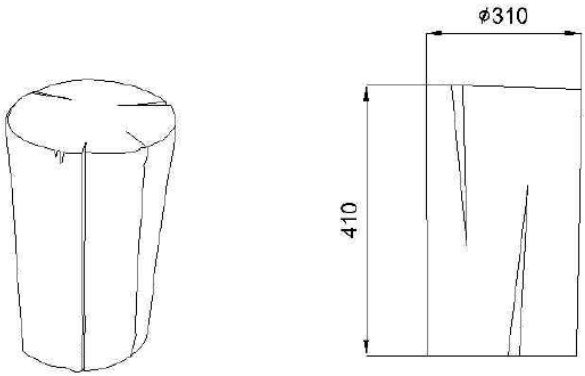

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24736748


ON-S009



SPECIFICATIONS

LED Power	3W
Dimensions	400 x 200 x 600 mm
Material	스테인리스강
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

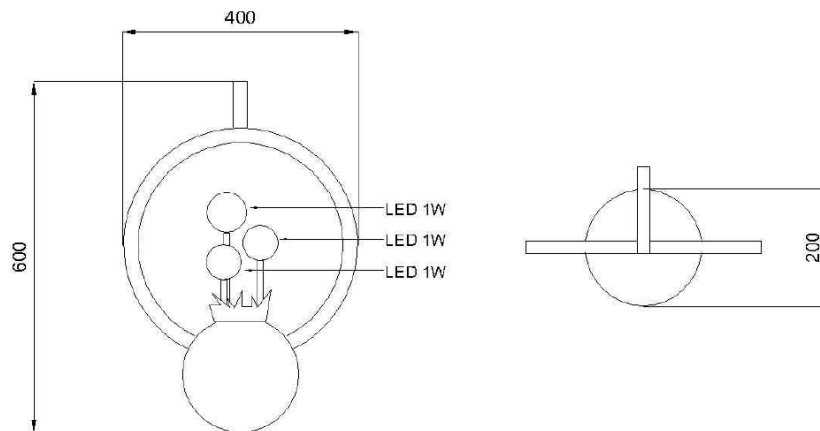

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24719719 / 24719720


ON-P018 / P018-1




SPECIFICATIONS

LED Power	3.5W
Dimensions	45 x 45 x 1000mm /1200 mm
Beam Angle	110°
CT / Color mixing	2700K, 3000K, 4000K, 6000K
Output (Lumen)	60 lm
IP	65

Dimensions Drawing

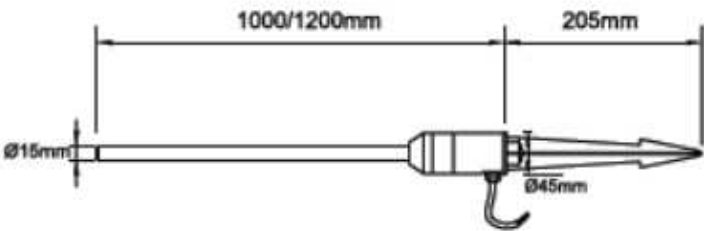

Photometric Data

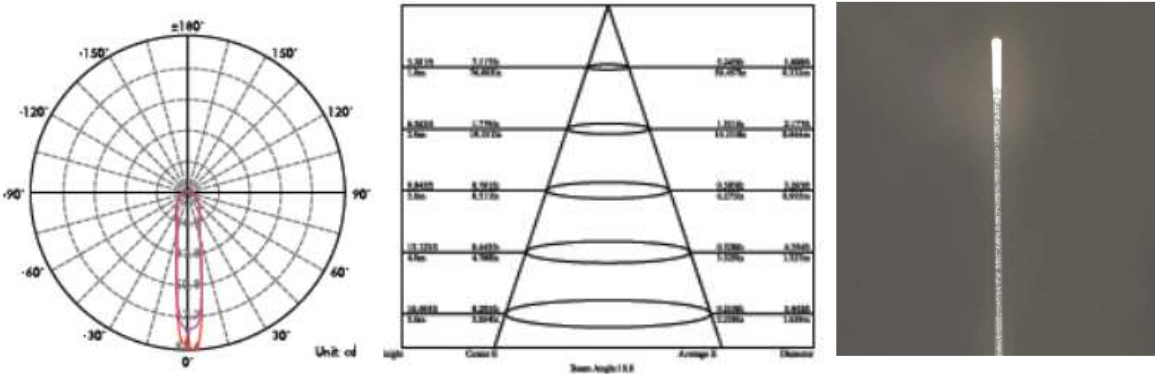

3000K, 110°

DECORATIVE LIGHT

나라장터 식별번호
24719705 / 24719706 / 24719707



ON-P004 / P005 / P006



SPECIFICATIONS

LED Power	5W /8W
Dimensions	403 x 138 x 70 / 400 x 139 x 120
Material	PC
Color	3000K, 4000K, 6000K, RGB
IP	65

Dimensions Drawing

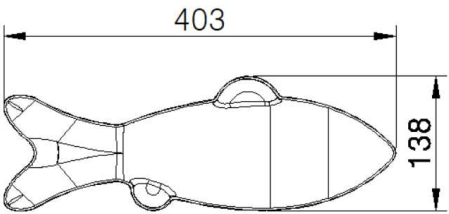

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24728267


ON-S020



SPECIFICATIONS

LED Power	5W
Dimensions	300 x 270 x 260
Material	PE
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

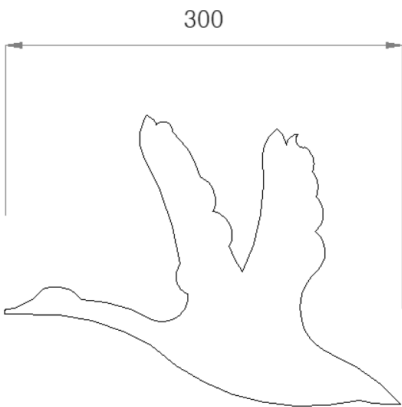

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480529 / 25480530


ON-A115 / A115-01



SPECIFICATIONS

LED Power	3W / 15W
Dimensions	Φ300 / Φ500
Material	PC
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

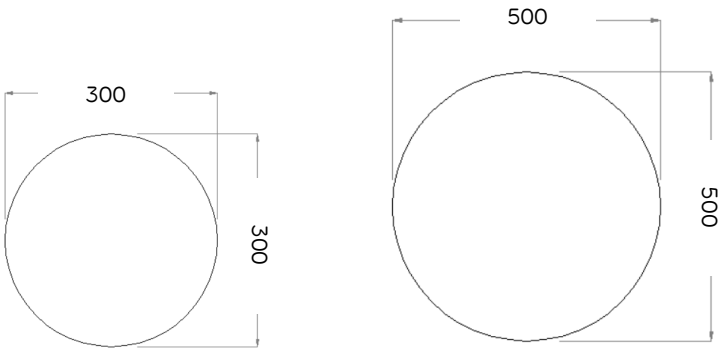

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25485921 / 25485922


ON-A117 / A118



SPECIFICATIONS

LED Power	5W / 10W
Dimensions	Φ350 / Φ500
Material	PE
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

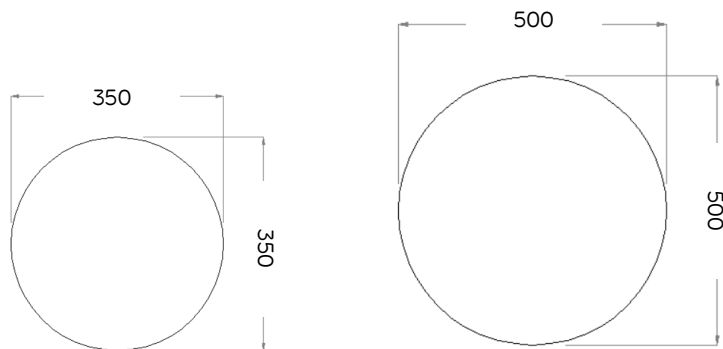


Application Case



DECORATIVE LIGHT

나라장터 식별번호
25493669


ON-A065



SPECIFICATIONS

LED Power	5.5W (3000K,6000K)
Dimensions	Φ60 x 600 mm
Material	Aluminum + PMMA
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

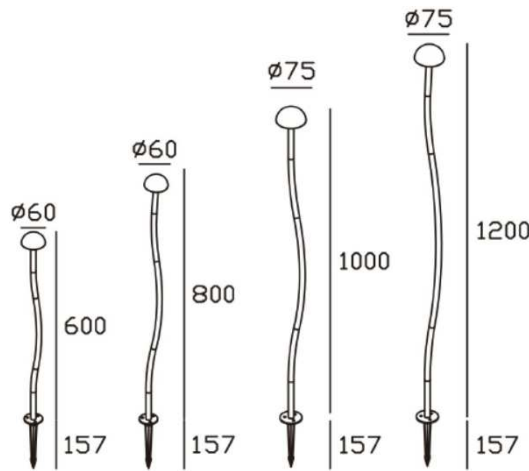


Application Case



DECORATIVE LIGHT

나라장터 식별번호
25485926


ON-A064

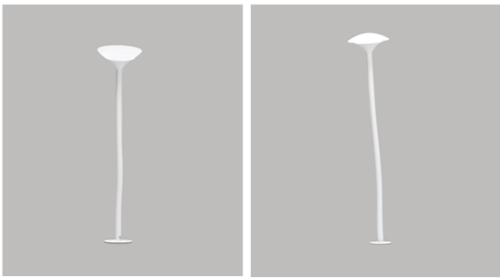


SPECIFICATIONS

LED Power	5.5W (3000K,6000K)
Dimensions	Φ98 x 440 mm
Material	Aluminum + PMMA
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

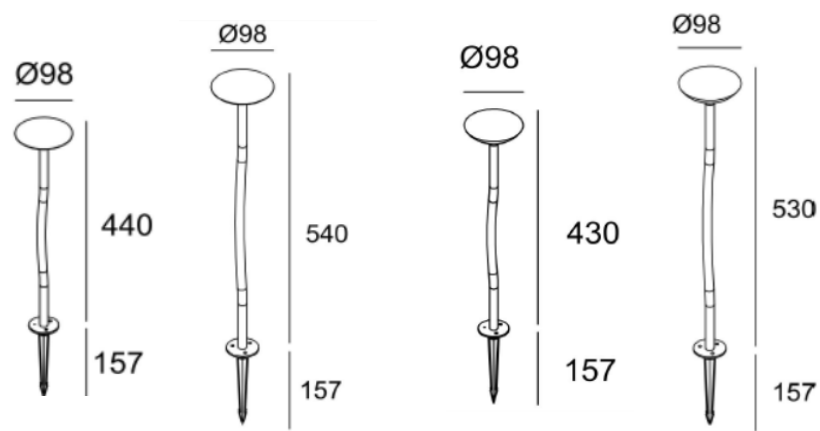

Application Case

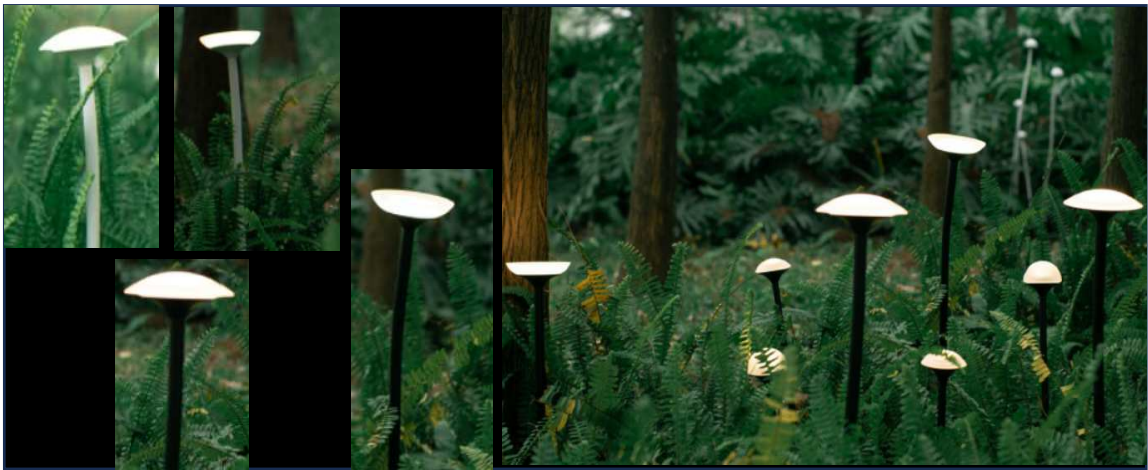

DECORATIVE LIGHT

나라장터 식별번호
25516520


ON-A133



SPECIFICATIONS

LED Power	1-30W
Dimensions	310 x 310 x 390mm
Material	Resin
Color	3000K, 6000K
IP	54

Dimensions Drawing

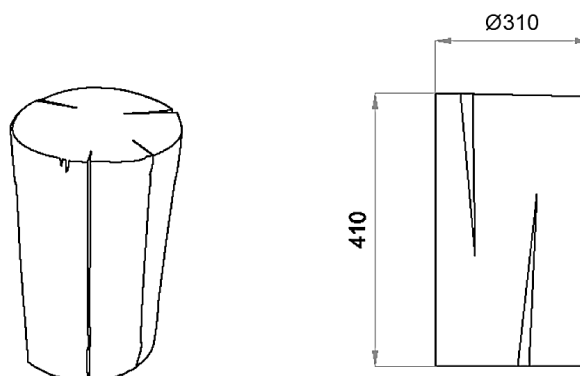

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24736749


ON-S018




SPECIFICATIONS

LED Power	6W
Dimensions	Φ500
Material	PE + 도안채색
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing



Application Case

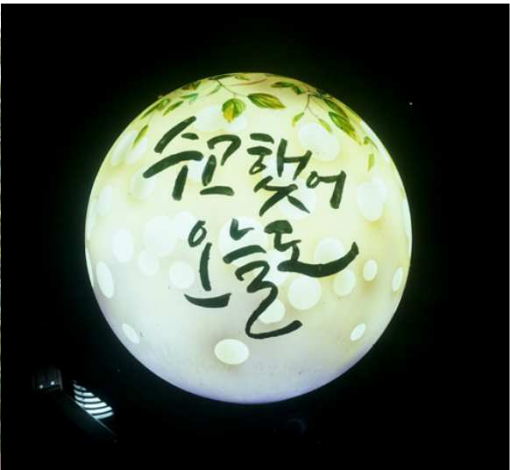

DECORATIVE LIGHT

나라장터 식별번호
24719749


ON-S006



SPECIFICATIONS

LED Power	8W
Dimensions	300 x 300 x 400 mm
Material	스테인리스강 + 분체도장
Color	3000K, 6000K, RGB
IP	54

Dimensions Drawing

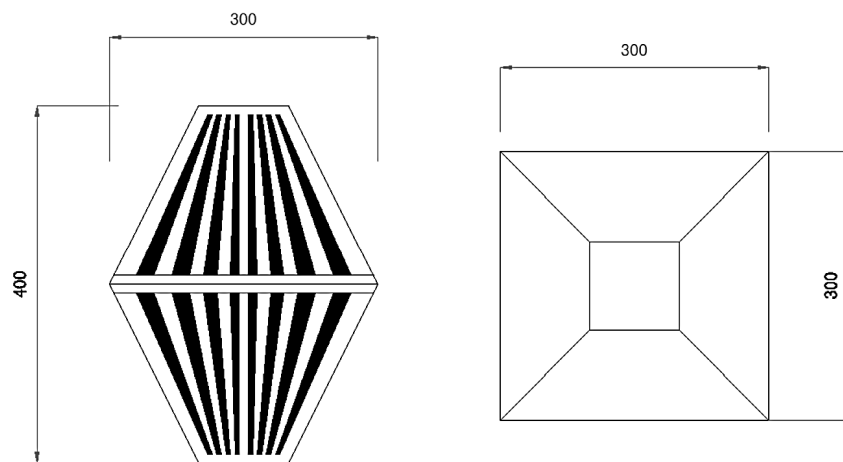

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24719747


ON-S005




SPECIFICATIONS

LED Power	8W
Dimensions	Φ500
Material	스테인리스강
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

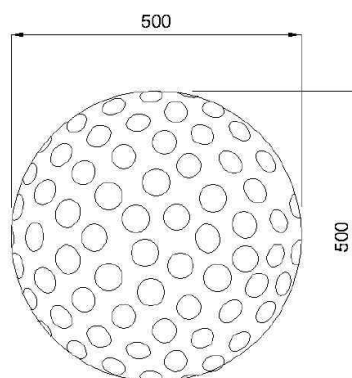

Application Case

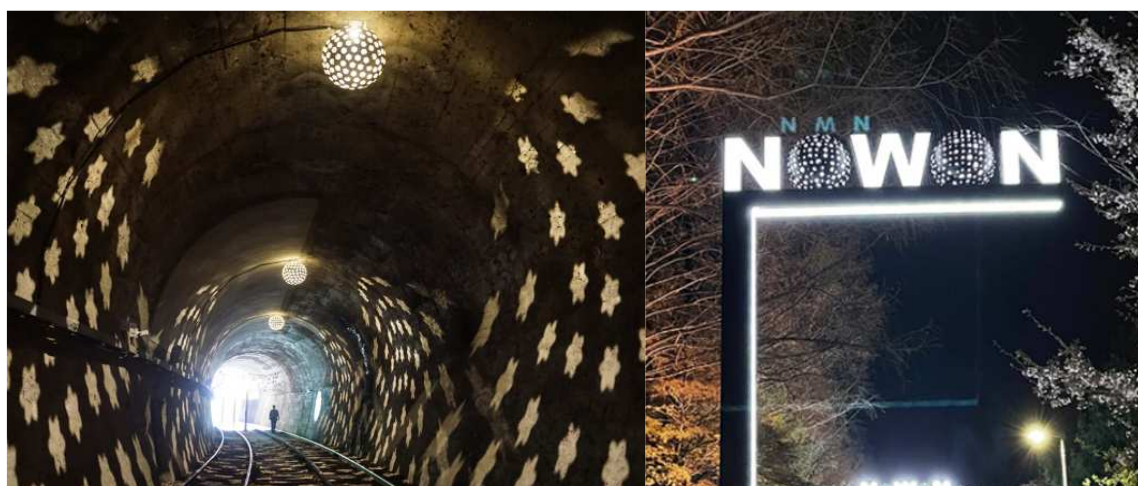

BOLLARD LIGHT

나라장터 식별번호
24719728


ON-B001




SPECIFICATIONS

LED Power	8W
Dimensions	200 x 200 x 500mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

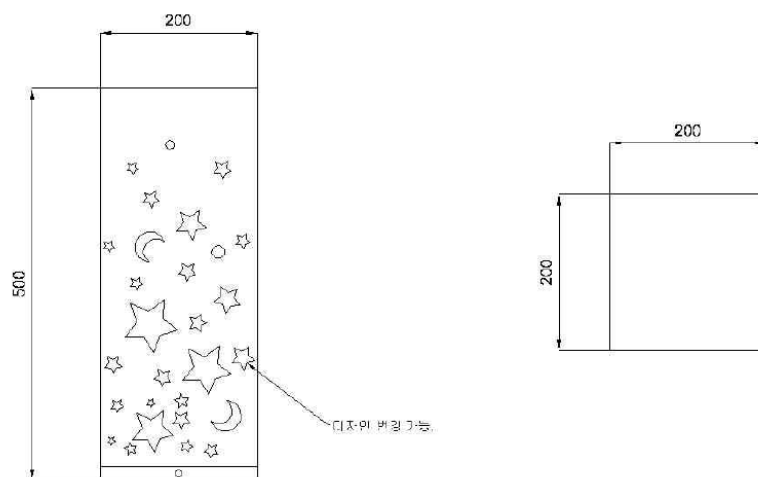


Application Case

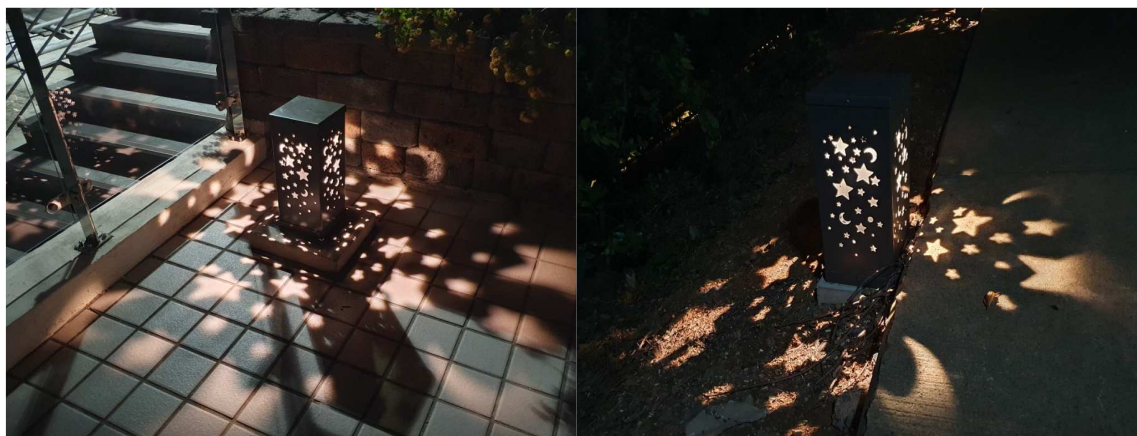

BOLLARD LIGHT

나라장터 식별번호
24728177


ON-S004




SPECIFICATIONS

LED Power	8W
Dimensions	350 x 350 x 350mm
CT / Color mixing	3000K, 4000K , 6000K
Material	스테인리스강 + 다이크로익필름
IP	65

Dimensions Drawing

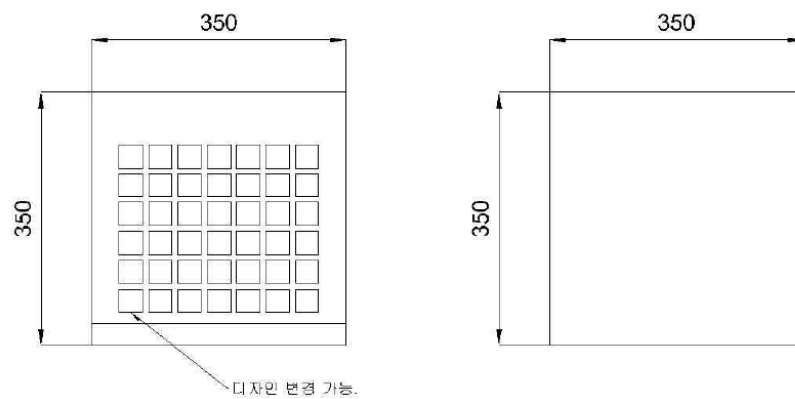

Application Case

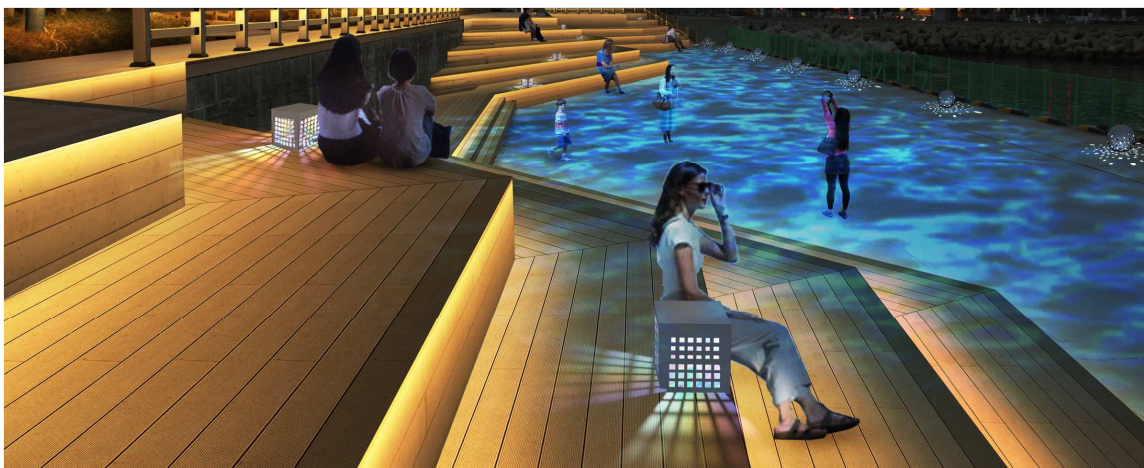

BOLLARD LIGHT

나라장터 식별번호
24728176


ON-S003



SPECIFICATIONS

LED Power	8W
Dimensions	500 x 500 x 350mm
CT / Color mixing	3000K, 4000K , 6000K
Material	스테인리스강
IP	65

Dimensions Drawing

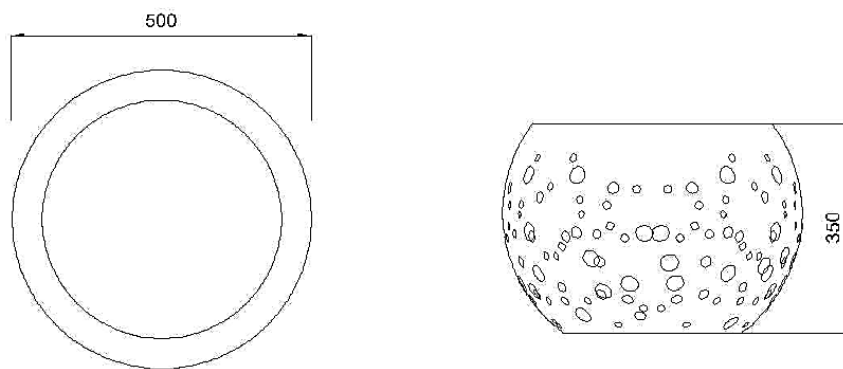

Application Case



BOLLARD LIGHT

나라장터 식별번호
25480437


ON-A041



SPECIFICATIONS

LED Power	10W
Dimensions	200 x 200 x 500mm
CT / Color mixing	3000K, 4000K , 6000K
Output (Lumen)	1100lm
IP	65

Dimensions Drawing

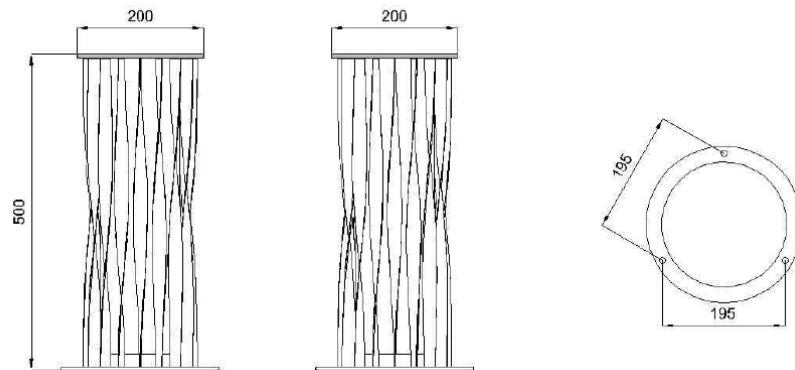

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25729995


ON-A161



SPECIFICATIONS

LED Power	15W
Dimensions	Φ400 (in Φ200)
Material	스테인리스강 + PE
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

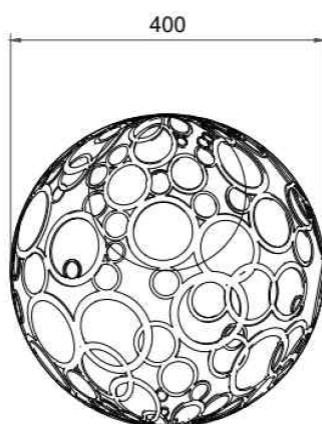

Application Case



BOLLARD LIGHT

나라장터 식별번호
25485914


ON-A042




SPECIFICATIONS

LED Power	15W
Dimensions	600 x 600 x 664mm
CT / Color mixing	3000K, 4000K , 6000K
Material	스테인리스강
IP	65

Dimensions Drawing

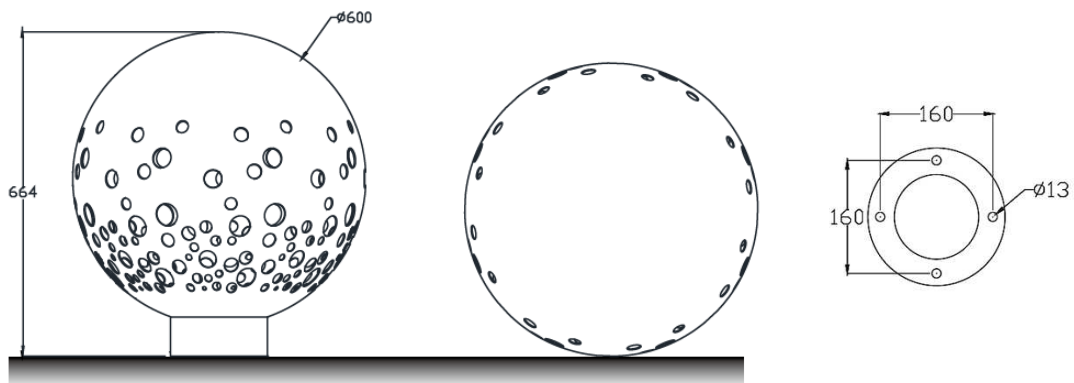

Application Case

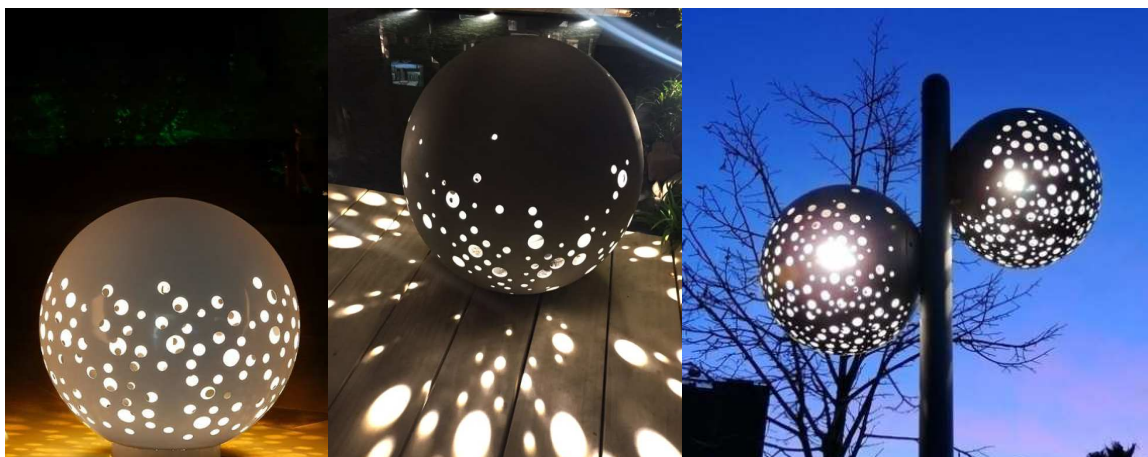

DECORATIVE LIGHT

나라장터 식별번호
25497956 / 25480556


ON-A132 / A129



SPECIFICATIONS

LED Power	10W / 60W
Dimensions	545.4 x 545.4 x 396 mm / 545.4 x 545.4 x 700 mm
Material	PE
Color	3000K, 6000K, RGB
IP	54

Dimensions Drawing

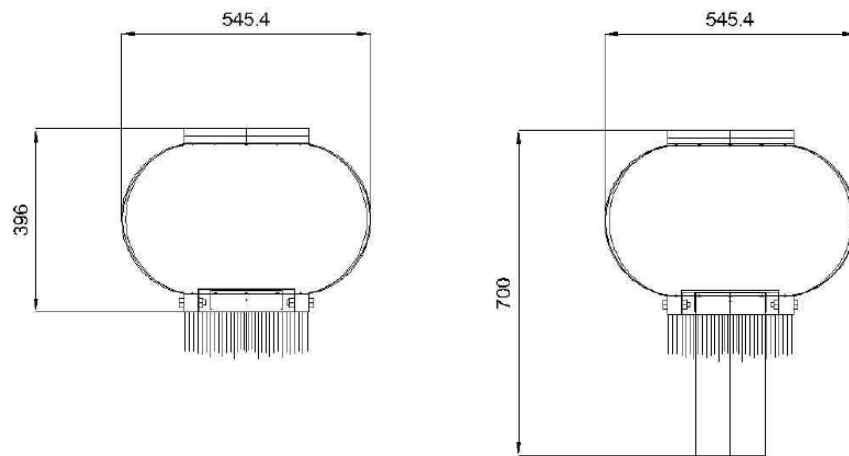

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480531


ON-A116



SPECIFICATIONS

LED Power	20W
Dimensions	Φ500
Material	스테인리스
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

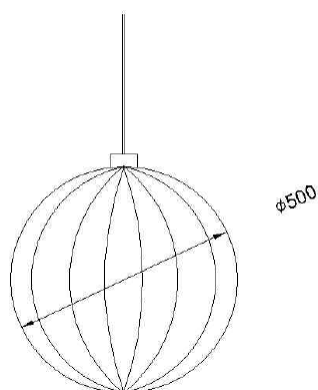

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480533


ON-A121



SPECIFICATIONS

LED Power	20W
Dimensions	500 x 500 x 500
Material	스테인리스
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

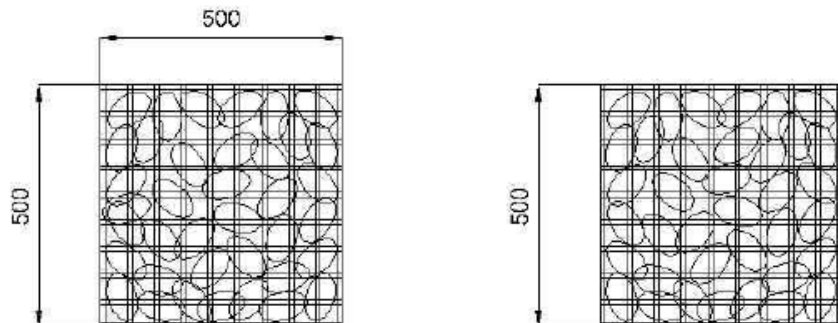


Application Case



DECORATIVE LIGHT

나라장터 식별번호
25485952


ON-A119



SPECIFICATIONS

LED Power	20W
Dimensions	1000 x 345 x 315
Material	PE
Color	3000K, 6000K, RGB
IP	65

Dimensions Drawing

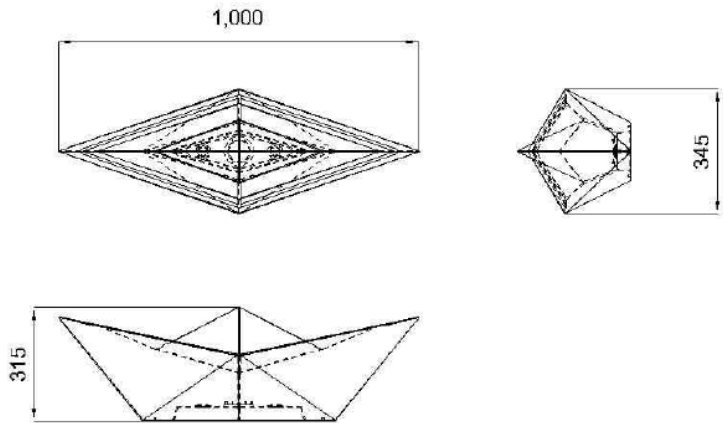

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25729993


ON-A159



SPECIFICATIONS

LED Power	60W
Dimensions	1000 x 400 x 1130mm
CT / Color mixing	3000K, 4000K , 6000K, RGB
Material	스테인리스강
IP	54

Dimensions Drawing

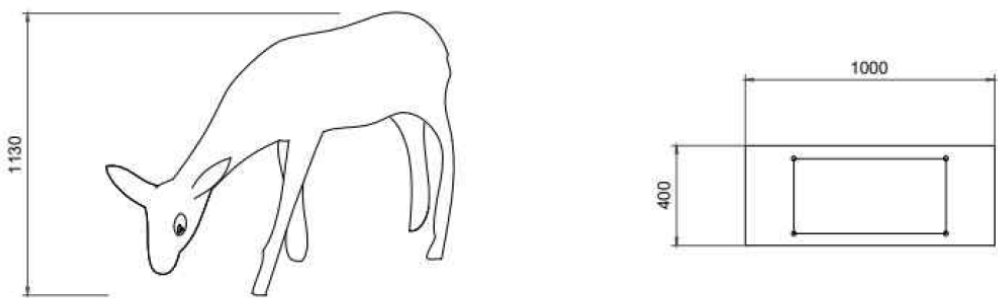

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25729994


ON-A160




SPECIFICATIONS

LED Power	60W
Dimensions	1060 x 400 x 2101mm
CT / Color mixing	3000K, 4000K , 6000K, RGB
Material	스테인리스강
IP	54

Dimensions Drawing

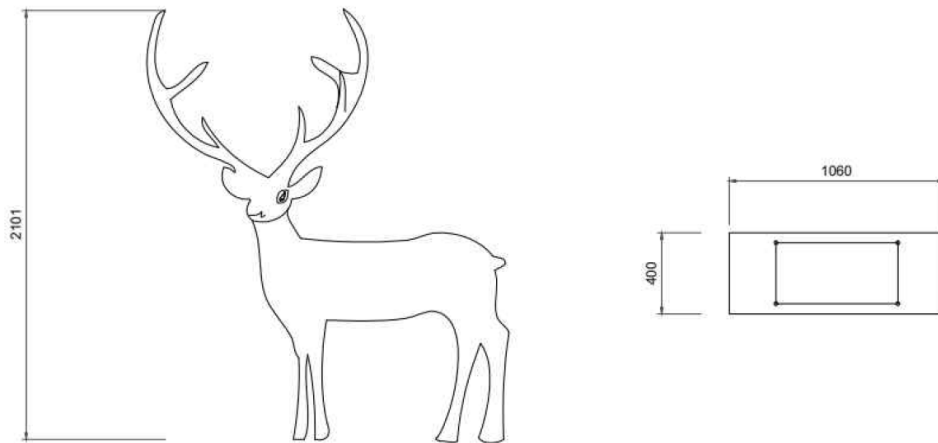

Application Case

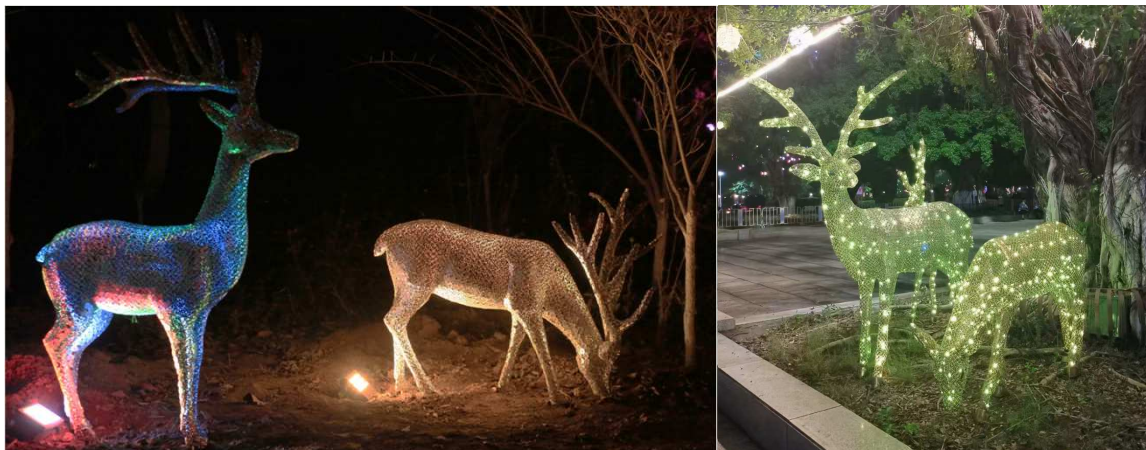

DECORATIVE LIGHT

나라장터 식별번호
25480526


ON-A112



SPECIFICATIONS

LED Power	76W
Dimensions	2200 x 2200 x 2500mm
CT / Color mixing	3000K, 4000K , 6000K
Material	FRP
IP	65

Dimensions Drawing

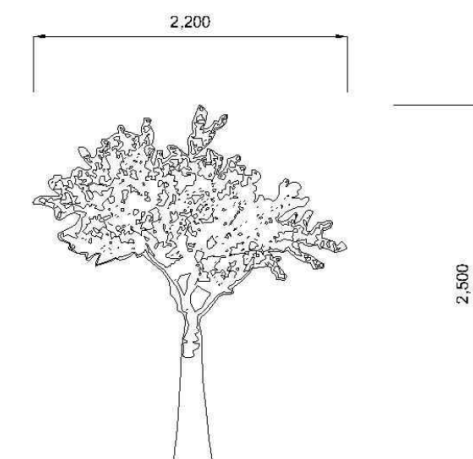

Application Case



DECORATIVE LIGHT

나라장터 식별번호
25480532


ON-A120




SPECIFICATIONS

LED Power	100W
Dimensions	1820 x 1820 x 2750mm
CT / Color mixing	3000K, 4000K , 6000K, RGB
Material	PE + 스테인리스
IP	65

Dimensions Drawing

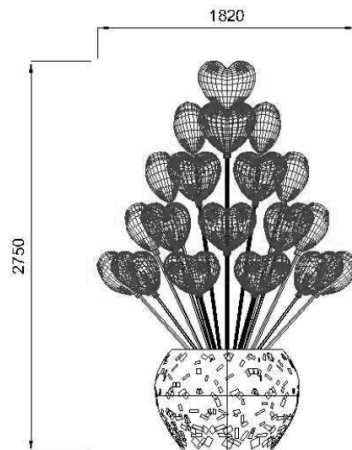


Application Case

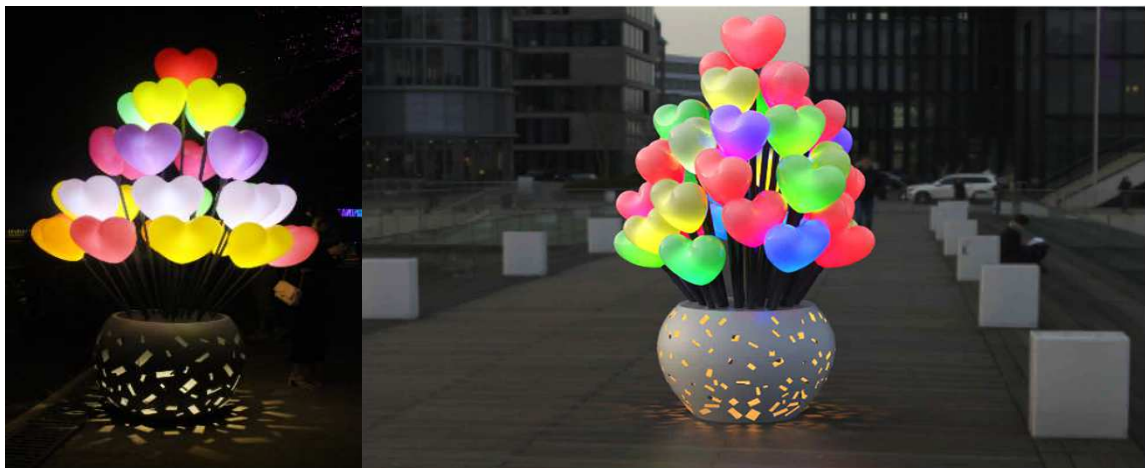

DECORATIVE LIGHT

나라장터 식별번호
24753216


ON-S015



SPECIFICATIONS

LED Power	10W
Dimensions	2700 x 500 x 3000mm
CT / Color mixing	3000K, 4000K , 6000K
Material	스테인리스강
IP	54

Dimensions Drawing

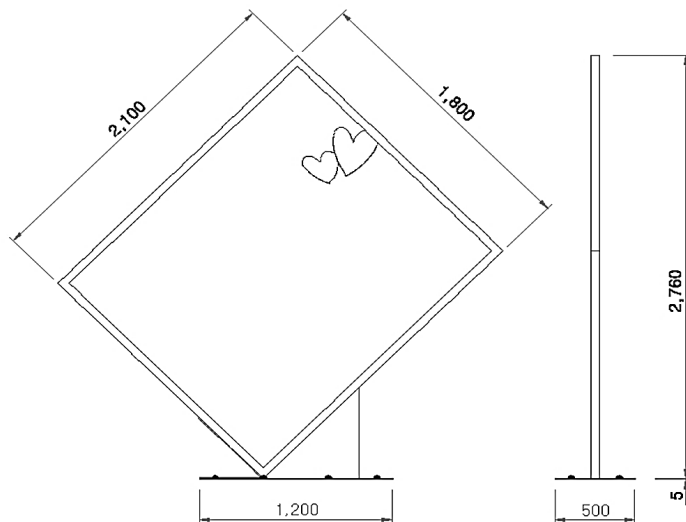

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24753217


ON-S014



SPECIFICATIONS

LED Power	10W
Dimensions	3000 x 500 x 3200mm
CT / Color mixing	3000K, 4000K , 6000K
Material	스테인리스강
IP	54

Dimensions Drawing

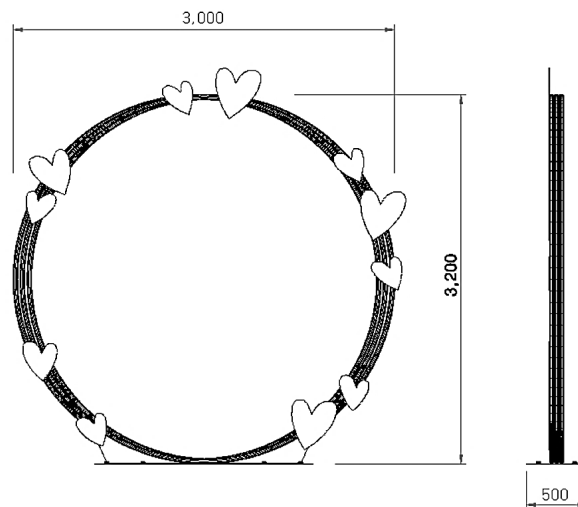

Application Case



DECORATIVE LIGHT

나라장터 식별번호
24736743


ON-S008



SPECIFICATIONS

LED Power	150W
Dimensions	2500 x 500 x 3000mm
CT / Color mixing	3000K, 4000K , 6000K
Material	철재
IP	54

Dimensions Drawing

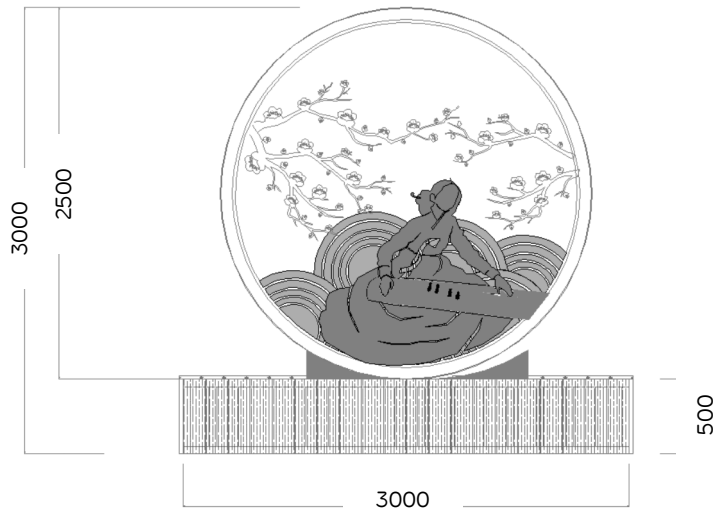


Application Case



BLOCK LIGHT

나라장터 식별번호
25493666 / 25493667 / 25493668


ON-A126 / A127 / A128



SPECIFICATIONS

LED Power	10-100W
Dimensions	1000 x 1000 x 20 / 30 / 40mm
CT / Color mixing	3000K, 4000K , 6000K, RGBW
Material	콘크리트 + 광섬유
IP	65

Dimensions Drawing

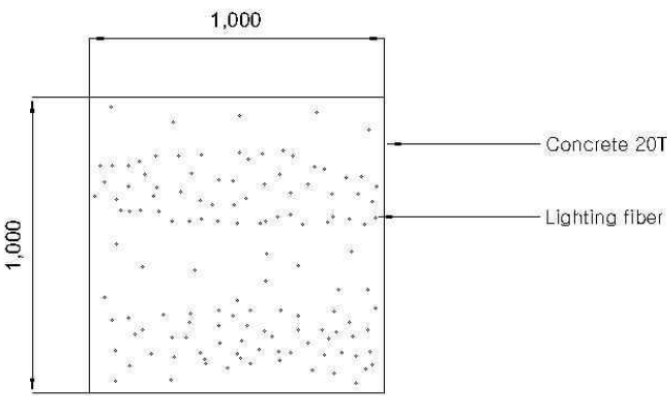

Application Case



BLOCK LIGHT

나라장터 식별번호
24719702


ON-P001



SPECIFICATIONS

LED Power	10W
Dimensions	600 x 300 x 60mm
CT / Color mixing	3000K, 4000K , 6000K, RGBW
Material	인조대리석 + 광섬유
IP	65

Dimensions Drawing

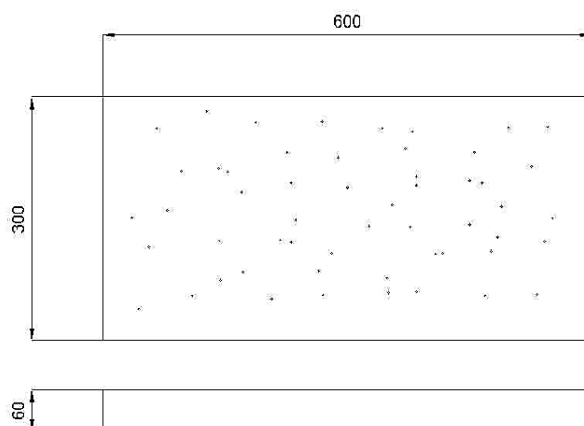

Application Case



IMAGE PROJECTION LIGHT

나라장터 식별번호
24888494


ON-F061



SPECIFICATIONS

LED Power	350W
Dimensions	605 x 343 x 250mm
Beam Angle (zoom)	8° - 40° (electronic zoom)
Rotating GOBO	7 Gobos+White, Gobo-flow effect, Gobo shake, Bi-directional rotation
Colors	One color wheel (7 dichroic-filters+White, Rainbow flow effect)
Prism	One 3 prism with bi-directional rotation, Speed adjustable
CMY	CMY sysem, Built-in Macro
Animation Wheel	Bi-directional rotation, Speed adjustable
Weight	23 KG
IP	66

Dimensions Drawing



Colors



Rotating GOBO



Animation Wheel



Illuminance at Distance


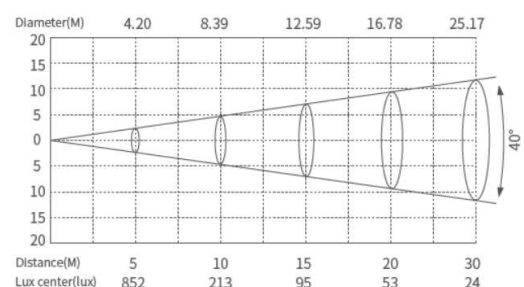


IMAGE PROJECTION LIGHT

나라장터 식별번호
25485895

ON-G-R750

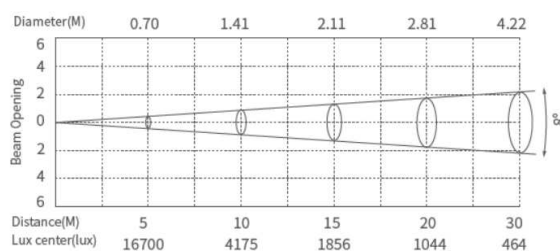

SPECIFICATIONS

LED Power	750W
Dimensions	683 x 343 x 250mm
Beam Angle (zoom)	5° - 52° (motorized linear zoom)
Rotating GOBO	2 rotating gobo wheels (7+open interchange glass gobos), Gobo-flow effect, Gobo shake, Bi-directional rotation
CCT	Linear CTO 2700K-6500K
Prism	One 4 prism with bi-directional rotation, Speed adjustable
Color mixing	CMY, independently variable 0 - 100%
Animation Wheel	Bi-directional rotation, Speed adjustable
Weight	27 KG
IP	66

Dimensions Drawing



Colors



Rotating GOBO Wheel 1



Framing System



Rotating GOBO Wheel 2



Animation Wheel



Illuminance at Distance

